
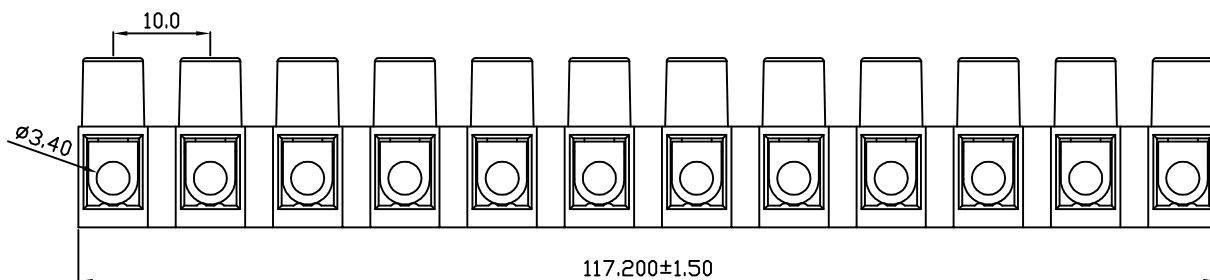


linear dimension(Tolerances Standard GB/T 14486-2008)								—	∕	⊥
variable range	to	over	over	over	over	over	over	to	over	over
	6	6 to 10	10 to 30	30 to 60	60 to 100	100 to 160	160 to		10 to 100	100 to
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

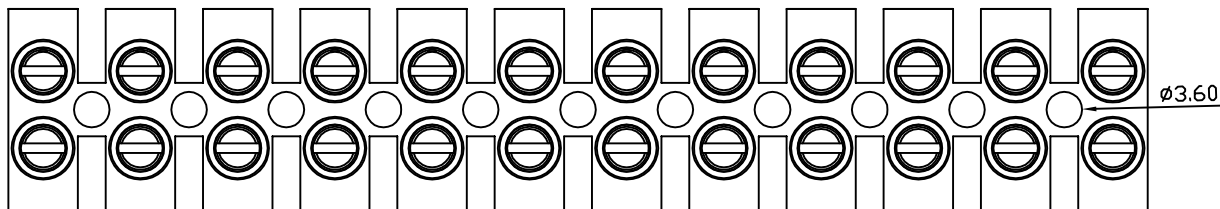

UL/CUL 技术参数		UL/CUL Technical Data		
额定电压	Rated Voltage	[V]	300	
额定电流	Rated Current	[A]	30	
接线范围	Wire Range	22-10		
单/多芯线	Solid/Stranded	[AWG]		
IEC 技术参数		IEC Technical Data		
额定电压	Rated Voltage	[V]	450	
额定电流	Rated Current	[A]	24	
耐电压	Withstanding Voltage	[AWG]	1600V/1Min	
导线截面积	Conductor cross section	1.0-2.5		
硬质/柔性导线	Solid/flexible	[mm ²]		
材料		Material		
绝缘材料	Insulation Material	PA66		
阻燃等级	Imflammability	UL94V-2		
导体材料	Contactur Material	铜合金 Copper alloy		
导体表面镀层	Contactive Coating	镀镍 Ni Plated		
一般参数		Other Data		
间距	Pitch	[mm]	10.0	
极数	Poles	[P]	02~12	
螺丝	Screw/扭矩	Torque(Max) [N.m]	M3/0.5	
工作温度	Operating temperatur	[°C]	-40~+105	
引针尺寸	Pin Dimensions	[mm]	-	
PCB板孔径	PCB Hole Diameter	[mm]	-	

DB10H — 10.0 — XXP — C — S/P

(Series No.) (Pitch) (Poles)

Slotted/Phillips

(Color):GN:(Green), BK:(Black), BU:(Blue), RD:(Red), GY:(Gray)
OG:(Orange), WT:(White), YL:(Yellow), CR:(Clear)

APPD: JTING Chen 2023.02.21
CHKD: Duck Mao 2023.02.21
DRFT: Steven Lu 2023.02.21

DORABO 宁波地博电气有限公司
Ningbo Dorabo Electric CO., Ltd

NAME: DB10H-10.0-XXP-C-S

TYPE: CUSTOMER_DRAWING

SIZE: A4

SCALE: 1:1

REV: T0-1

SHEET: 1/1