
TERMINAL BLOCK INDUSTRY MANUFACTURER

接线端子行业制造商

DORABO®
















慈溪市地博电子有限公司

CIXI DORABO ELECTRONICS CO.,LTD.

慈溪市地博电子有限公司（总部）

地址：浙江省慈溪市长河镇沧大公路828号

电话：+86-0574-23633687

+86-13185980275

传真：+86-0574-63419581

网址：www.nbdibo.com

www.terminalblock.net

慈溪市地博电子有限公司

CIXI DORABO ELECTRONICS CO.,LTD.

INTRODUCTION

Founded in 2000, DoraboElectronics is a professional manufacturer of terminal blocks. It is a company with strong technical strength, rapid growth and great scale in the industry. Since the establishment of the company, with the support of all walks of life, through the joint efforts of all colleagues in the company, the company has achieved remarkable results for more than ten years. From sales performance to corporate image, it has been recognized by customers and industry peers. A welcome brand effect.

The company has consistently adhered to the "people-oriented, market-oriented" business philosophy. In terms of product standards, Dibo Electronics has studied IEC, UL, VDE, GB, CE, CQC and other relevant domestic and international standards, and compiled according to these standards. More stringent corporate standards, from product development, mold design, raw material procurement, metal parts manufacturing, plastic parts molding, to finished product assembly and quality inspection, packaging and delivery, etc., each link is professional In accordance with the corresponding standards, the personnel are responsible for producing products that are marketable and applicable to industrial automation in the world. They actively follow, introduce and learn from the technology of internationally renowned brand products, technological innovation, and forge ahead. At present, the company produces dozens of series and thousands of specifications, which provide rich product guarantee for customer selection. The company has passed the TUV Rheinland ISO9001 quality management system and ISO14001 environmental system certification. The products have passed UL, CUL, TUV, CQC, CE, VDE certification, and all products meet the Rohs and Reach environmental requirements.

Our products are mainly sold to France, Russia, Brazil, Southeast Asia, Hong Kong and Taiwan. As a privately-owned enterprise with foreign sales, Dibo Electronics is in the international market, directly feels the market atmosphere, and listens to customers' needs in a row. Improve the technical content of product design, production, operation and management, and implement scientific management of the whole process of production operations. In recent years, the reputation of "Dibo" has spread throughout the country, and the business philosophy of "Dibo" has been fully realized and won the hearts of the people. The service of "Dibo" has won the appreciation of customers. "Tengfei's land, proud of the land", is based on advanced management mode, strong technical strength, perfect process, first-class testing equipment and superb mold processing technology, to produce high cost performance Based on the premise of the product, with the excellent sales team, careful sales network and professional service, we have won a new chapter in the market.

地博电子成立于 2000 年，是专业接线端子生产企业，是该行业里技术力量雄厚、成长迅速、极具规模化的企业。公司成立以来，在社会各界的关怀支持下，经公司全体同仁共同努力，十多年来公司取得了令人瞩目的成绩，从销售业绩到企业形象均得到了 客户及业界同行的认可，并取得了可喜的品牌效应。

公司一贯坚持“以人为本，以市场为导向”的经营理念，在产品标准方面，地博电子潜心研究了 IEC、UL、VDE、GB、CE、CQC 等国内外相关标准，并按照这些标准自行编制了更为严格的企业标准，从产品的开发、模具的设计、原材料的采购、金属零部件的制作、塑料配件的成型，到成品组装以及品质检测、包装发货等，每个环节均由专业的人员按照相应的标准层层把关，以生产适销对路、应用于全球范围内工业自动化领域的产品为己任，积极追随、引进、借鉴国际知名品牌产品的技术，科技创新，锐意进取。目前公司生产的数十个系列，上千个规格的产品，为客户选型提供了丰富的产品保障。公司通过了德国莱茵 TUV ISO9001 质量管理体系及 ISO14001 环境体系认证，产品通过了 UL、CUL、TUV、CQC、CE、VDE 认证，所有产品均符合 Rohs 和 Reach 环保要求。

我司产品主要销往法国、俄罗斯、巴西、东南亚、香港和台湾等地区，作为一家以外销为主的民营独资企业，地博电子置身于国际市场，直接感受市场气息，当面倾听客户需求，不断提升产品设计、生产、经营、管理过程中的技术含量，对生产作业的全过程实施科学的管理。近年来“地博”名声遍及大江南北，“地博”的经营理念发挥得淋漓尽致、深得人心，“地博”的服务颇得广大客户赞赏。“腾飞的地博，骄傲的地博”，地博人正是凭借先进的管理模式、雄厚的技术实力、完善的工艺制程、一流的检测设备和精湛的模具加工技术，以生产高出性价比的产品为前提，凭借卓越的销售团队、周密的销售网络、专业化的服务，赢来了开拓市场新篇章的今天。





螺钉式PCB接线端子
PCB SCREW TERMINAL BLOCK
DORABO®
www.nbdibo.com
www.terminalblock.net


Terminal Block Professional Manufacturer



螺钉式PCB接线端子
PCB SCREW TERMINAL BLOCK

螺钉式PCB接线端子，结构设计兼顾了接线方便，螺钉连接牢固的特点，可以连接截面为0.08mm²至 35mm²的所有类型的导线，间距2.54mm至15.0mm可供选择。产品设计符合IEC60947、UL1059、CSA C22.2 No.158等国际标准。


PCB universal screw terminal blocks, this typical feature of the screw connection system is characterized by the easy connection and extremely high contact strengths. Provide the wire size from 0.08mm² to 35mm², Available with different pitches from 2.54mm to 15.0mm. The product is designed in accordance with IEC 60947 , UL1059, CSA C22.2 NO.158 standards.



Pitch:5.0mm

DB300V–5.0

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	250	-	250
额定电流	Rated Current [A]	16	-	10
接线范围 Wire Range	单芯线 Solid [AWG]	22~14		
	多芯线 Stranded [AWG]	22~14		
耐电压	Dielectric Voltage-Withstand	1.5KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	250	400	630
额定电流	Rated Current [A]	24	24	24
额定冲击电压	Impulse withstand voltage [KV]	4	4	4
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	0.5~2.5		
	柔性导线 Flexible[mm²]	0.5~2.5		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	5.0/2~24		
剥线长度	Stripping Length [mm]	5~6		
螺丝/扭矩	Screw/Torque(Max)[N.m]	M3/0.5		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	250℃ /5S		
引针尺寸	Pin dimensions [mm]	∅1.0		
PCB板孔径	PCB Hole Diameter [mm]	∅1.2		

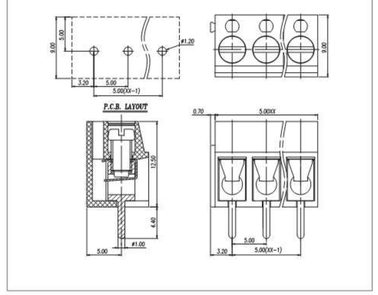





Pitch:5.0mm

DB300R–5.0

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	250	-	250
额定电流	Rated Current [A]	16	-	10
接线范围 Wire Range	单芯线 Solid [AWG]	22~14		
	多芯线 Stranded [AWG]	22~14		
耐电压	Dielectric Voltage-Withstand	1.5KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	250	400	630
额定电流	Rated Current [A]	24	24	24
额定冲击电压	Impulse withstand voltage [KV]	4	4	4
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	0.5~2.5		
	柔性导线 Flexible[mm²]	0.5~2.5		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	5.0/2~24		
剥线长度	Stripping Length [mm]	5~6		
螺丝/扭矩	Screw/Torque(Max)[N.m]	M3/0.5		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	250℃ /5S		
引针尺寸	Pin dimensions [mm]	∅1.0		
PCB板孔径	PCB Hole Diameter [mm]	∅1.2		







Pitch:5.0mm

DB300B–5.0

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	250	-	250
额定电流	Rated Current [A]	16	-	10
接线范围 Wire Range	单芯线 Solid [AWG]	22~14		
	多芯线 Stranded [AWG]	22~14		
耐电压	Dielectric Voltage-Withstand	1.5KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	250	400	630
额定电流	Rated Current [A]	24	24	24
额定冲击电压	Impulse withstand voltage [KV]	4	4	4
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	0.5~2.5		
	柔性导线 Flexible[mm²]	0.5~2.5		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	5.0/2~24		
剥线长度	Stripping Length [mm]	5~6		
螺丝/扭矩	Screw/Torque(Max)[N.m]	M2.5/0.4		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	250℃ /5S		
引针尺寸	Pin dimensions [mm]	0.6*1.1		
PCB板孔径	PCB Hole Diameter [mm]	∅1.5		






Pitch:7.5mm

DB300V-7.5


UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	250	-	250
额定电流	Rated Current [A]	16	-	10
接线范围 Wire Range	单芯线 Solid [AWG]	22~14		
	多芯线 Stranded [AWG]	22~14		
耐电压	Dielectric Voltage-Withstand	1.5KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	250	400	630
额定电流	Rated Current [A]	24	24	24
额定冲击电压	Impulse withstand voltage [KV]	6	6	6
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	0.5~2.5		
	柔性导线 Flexible[mm²]	0.5~2.5		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	7.5/2~24		
剥线长度	Stripping Length [mm]	5~6		
螺丝/扭矩	Screw/Torque(Max)[N.m]	M3/0.5		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	250℃ /5S		
引针尺寸	Pin dimensions [mm]	∅1.0		
PCB板孔径	PCB Hole Diameter [mm]	∅1.2		



Pitch:7.5mm

DB300B-7.5


UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	250	-	250
额定电流	Rated Current [A]	16	-	10
接线范围 Wire Range	单芯线 Solid [AWG]	22~14		
	多芯线 Stranded [AWG]	22~14		
耐电压	Dielectric Voltage-Withstand	1.5KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	250	400	630
额定电流	Rated Current [A]	24	24	24
额定冲击电压	Impulse withstand voltage [KV]	4	4	4
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	0.5~2.5		
	柔性导线 Flexible[mm²]	0.5~2.5		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	7.5/2~24		
剥线长度	Stripping Length [mm]	5~6		
螺丝/扭矩	Screw/Torque(Max)[N.m]	M2.5/0.4		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	250℃ /5S		
引针尺寸	Pin dimensions [mm]	1.1*0.6		
PCB板孔径	PCB Hole Diameter [mm]	∅1.5		




Pitch:5.0mm

DB301V-5.0

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	250	-	250
额定电流	Rated Current [A]	16	-	10
接线范围 Wire Range	单芯线 Solid [AWG]	22~14		
	多芯线 Stranded [AWG]	22~14		
耐电压	Dielectric Voltage-Withstand	1.5KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	250	400	630
额定电流	Rated Current [A]	17.5	17.5	17.5
额定冲击电压	Impulse withstand voltage [KV]	4	4	4
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	0.5~1.5		
	柔性导线 Flexible[mm²]	0.5~1.5		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	5.0/2~24		
剥线长度	Stripping Length [mm]	5~6		
螺丝/扭矩	Screw/Torque(Max)[N.m]	M2.5/0.4		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	250℃ /5S		
引针尺寸	Pin dimensions [mm]	∅1.0		
PCB板孔径	PCB Hole Diameter [mm]	∅1.2		







Pitch:5.0mm

DB301R-5.0

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	250	-	250
额定电流	Rated Current [A]	16	-	10
接线范围 Wire Range	单芯线 Solid [AWG]	22~14		
	多芯线 Stranded [AWG]	22~14		
耐电压	Dielectric Voltage-Withstand	1.5KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	250	400	630
额定电流	Rated Current [A]	17.5	17.5	17.5
额定冲击电压	Impulse withstand voltage [KV]	4	4	4
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	0.5~1.5		
	柔性导线 Flexible[mm²]	0.5~1.5		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	5.0/2~24		
剥线长度	Stripping Length [mm]	5~6		
螺丝/扭矩	Screw/Torque(Max)[N.m]	M2.5/0.4		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	250℃ /5S		
引针尺寸	Pin dimensions [mm]	∅1.0		
PCB板孔径	PCB Hole Diameter [mm]	∅1.2		

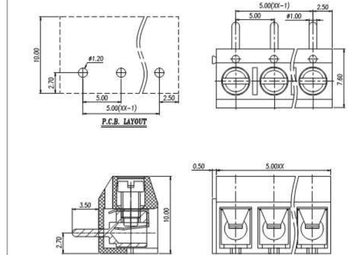




Pitch:5.0mm

DB301B-5.0

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	250	-	250
额定电流	Rated Current [A]	16	-	10
接线范围 Wire Range	单芯线 Solid [AWG]	22~14		
	多芯线 Stranded [AWG]	22~14		
耐电压	Dielectric Voltage-Withstand	1.5KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	250	400	630
额定电流	Rated Current [A]	17.5	17.5	17.5
额定冲击电压	Impulse withstand voltage [KV]	4	4	4
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	0.5~1.5		
	柔性导线 Flexible[mm²]	0.5~1.5		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	5.0/2~24		
剥线长度	Stripping Length [mm]	5~6		
螺丝/扭矩	Screw/Torque(Max)[N.m]	M2.5/0.4		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	250℃ /5S		
引针尺寸	Pin dimensions [mm]	0.6*1.0		
PCB板孔径	PCB Hole Diameter [mm]	∅1.4		

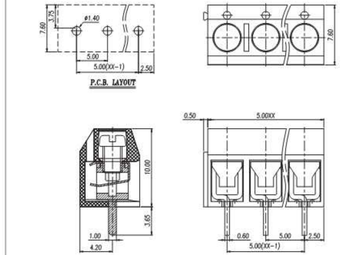




Pitch:5.0mm

DB331K-5.0

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	12	-	10
接线范围 Wire Range	单芯线 Solid [AWG]	28~14		
	多芯线 Stranded [AWG]	28~14		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	250	320	400
额定电流	Rated Current [A]	12	12	12
额定冲击电压	Impulse withstand voltage [KV]	4	4	4
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	0.5~1.5		
	柔性导线 Flexible[mm²]	0.5~1.5		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Ni plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	5.0/2~24		
剥线长度	Stripping Length [mm]	5~6		
螺丝/扭矩	Screw/Torque(Max)[N.m]	M2.5/0.4		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	/		
引针尺寸	Pin dimensions [mm]	/		
PCB板孔径	PCB Hole Diameter [mm]	/		






Pitch:5.0mm

DB332K−5.0

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	10	-	10
接线范围 Wire Range	单芯线 Solid [AWG]	28~16		
	多芯线 Stranded [AWG]	28~16		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	250	320	400
额定电流	Rated Current [A]	12	12	12
额定冲击电压	Impulse withstand voltage [KV]	4	4	4
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	0.2~1.5		
	柔性导线 Flexible[mm²]	0.2~1.5		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Ni plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	5.0/2~24		
剥线长度	Stripping Length [mm]	5~6		
螺丝/扭矩	Screw/Torque(Max)[N.m]	M2.5/0.4		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	/		
引针尺寸	Pin dimensions [mm]	/		
PCB板孔径	PCB Hole Diameter [mm]	/		

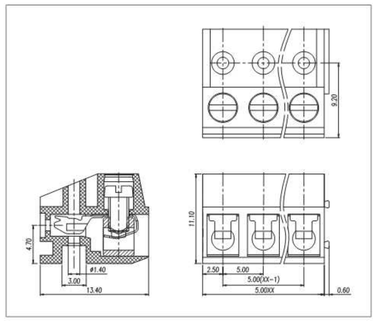




Pitch:3.5mm

DB332K−3.5

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	8	-	8
接线范围 Wire Range	单芯线 Solid [AWG]	28~16		
	多芯线 Stranded [AWG]	28~16		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	160	250	250
额定电流	Rated Current [A]	8	8	8
额定冲击电压	Impulse withstand voltage [KV]	2.5	2.5	2.5
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	0.2~1.0		
	柔性导线 Flexible[mm²]	0.2~1.0		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	3.5/2~24		
剥线长度	Stripping Length [mm]	5~6		
螺丝/扭矩	Screw/Torque(Max)[N.m]	M2/0.2		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	/		
引针尺寸	Pin dimensions [mm]	/		
PCB板孔径	PCB Hole Diameter [mm]	/		






Pitch:3.5mm

DB335K−3.5

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	10	-	10
接线范围 Wire Range	单芯线 Solid [AWG]	26~16		
	多芯线 Stranded [AWG]	26~16		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	160	200	400
额定电流	Rated Current [A]	8	8	8
额定冲击电压	Impulse withstand voltage [KV]	2.5	2.5	2.5
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	0.2~1.5		
	柔性导线 Flexible[mm²]	0.2~1.5		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	3.5/2~24		
剥线长度	Stripping Length [mm]	4~5		
螺丝/扭矩	Screw/Torque(Max)[N.m]	M2/0.2		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	/		
引针尺寸	Pin dimensions [mm]	/		
PCB板孔径	PCB Hole Diameter [mm]	/		






Pitch:5.0mm

DB332V−5.0

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	10	-	10
接线范围 Wire Range	单芯线 Solid [AWG]	/		
	多芯线 Stranded [AWG]	/		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	250	320	400
额定电流	Rated Current [A]	12	12	12
额定冲击电压	Impulse withstand voltage [KV]	4	4	4
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	/		
	柔性导线 Flexible[mm²]	/		
材料 Material				
绝缘材料	Insulation Material	PBT		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	5.0/2~24		
剥线长度	Stripping Length [mm]	/		
螺丝/扭矩	Screw/Torque(Max)[N.m]	/		
工作温度	Operating temperature[℃]	-30~+120		
焊锡温度	Soldering temperature	250℃ /5S		
引针尺寸	Pin dimensions [mm]	∅1.3		
PCB板孔径	PCB Hole Diameter [mm]	∅1.6		






Pitch:3.5mm

DB332V−3.5

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	8	-	8
接线范围 Wire Range	单芯线 Solid [AWG]	/		
	多芯线 Stranded [AWG]	/		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	160	250	250
额定电流	Rated Current [A]	8	8	8
额定冲击电压	Impulse withstand voltage [KV]	2.5	2.5	2.5
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	/		
	柔性导线 Flexible[mm²]	/		
材料 Material				
绝缘材料	Insulation Material	PBT		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	3.5/2~24		
剥线长度	Stripping Length [mm]	/		
螺丝/扭矩	Screw/Torque(Max)[N.m]	/		
工作温度	Operating temperature[℃]	-30~+120		
焊锡温度	Soldering temperature	250℃ /5S		
引针尺寸	Pin dimensions [mm]	∅1.0		
PCB板孔径	PCB Hole Diameter [mm]	∅1.2		

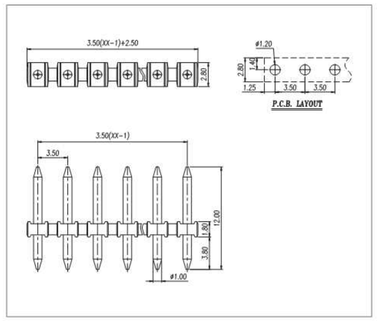





Pitch:3.5/3.81mm

DB301V−3.5/3.81

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	125	-	-
额定电流	Rated Current [A]	10	-	-
接线范围 Wire Range	单芯线 Solid [AWG]	24~18		
	多芯线 Stranded [AWG]	24~18		
耐电压	Dielectric Voltage-Withstand	1.25KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	160	250	320
额定电流	Rated Current [A]	13.5	13.5	13.5
额定冲击电压	Impulse withstand voltage [KV]	2.5	2.5	2.5
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	0.5~1.0		
	柔性导线 Flexible[mm²]	0.5~1.0		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	3.5,3.81/2~24		
剥线长度	Stripping Length [mm]	5~6		
螺丝/扭矩	Screw/Torque(Max)[N.m]	M2/0.2		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	250℃ /5S		
引针尺寸	Pin dimensions [mm]	∅0.8		
PCB板孔径	PCB Hole Diameter [mm]	∅1.0		

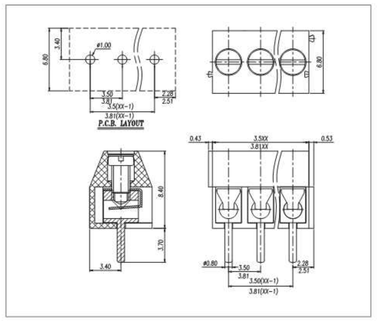




Pitch:3.5/3.81mm

DB301R-3.5/3.81

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	125	-	-
额定电流	Rated Current [A]	10	-	-
接线范围 Wire Range	单芯线 Solid [AWG]	24~18		
	多芯线 Stranded [AWG]	24~18		
耐电压	Dielectric Voltage-Withstand	1.25KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	160	250	320
额定电流	Rated Current [A]	13.5	13.5	13.5
额定冲击电压	Impulse withstand voltage [KV]	2.5	2.5	2.5
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	0.5~1.0		
	柔性导线 Flexible[mm²]	0.5~1.0		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	3.5,3.81/2~24		
剥线长度	Stripping Length [mm]	5~6		
螺丝/扭矩	Screw/Torque(Max)[N.m]	M2/0.2		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	250℃ /5S		
引针尺寸	Pin dimensions [mm]	∅0.8		
PCB板孔径	PCB Hole Diameter [mm]	∅1.0		

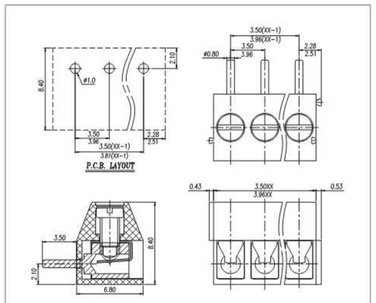




Pitch:5.0mm

DB126V-5.0

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	8	-	8
接线范围 Wire Range	单芯线 Solid [AWG]	26~14		
	多芯线 Stranded [AWG]	26~14		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	250	400	630
额定电流	Rated Current [A]	18	18	18
额定冲击电压	Impulse withstand voltage [KV]	4	4	4
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	0.5~2.5		
	柔性导线 Flexible[mm²]	0.5~2.5		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	5.0/2~24		
剥线长度	Stripping Length [mm]	6~7		
螺丝/扭矩	Screw/Torque(Max)[N.m]	M2.5/0.25		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	250℃ /5S		
引针尺寸	Pin dimensions [mm]	0.6*1.0		
PCB板孔径	PCB Hole Diameter [mm]	∅1.4		

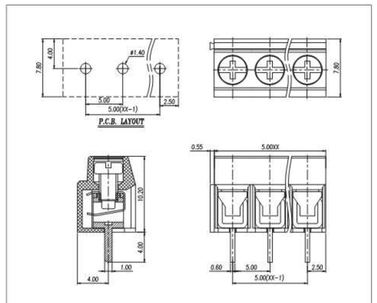




Pitch:5.0mm

DB126R-5.0

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	8	-	8
接线范围 Wire Range	单芯线 Solid [AWG]	26~14		
	多芯线 Stranded [AWG]	26~14		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	250	400	630
额定电流	Rated Current [A]	18	18	18
额定冲击电压	Impulse withstand voltage [KV]	4	4	4
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	0.5~2.5		
	柔性导线 Flexible[mm²]	0.5~2.5		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	5.0/2~24		
剥线长度	Stripping Length [mm]	6~7		
螺丝/扭矩	Screw/Torque(Max)[N.m]	M2.5/0.25		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	250℃ /5S		
引针尺寸	Pin dimensions [mm]	0.6*1.0		
PCB板孔径	PCB Hole Diameter [mm]	∅1.4		

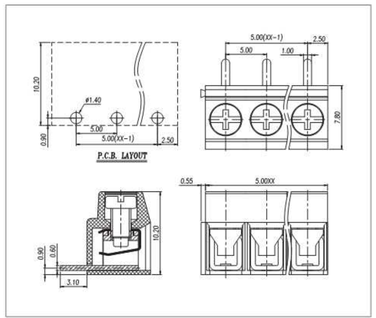





Pitch:5.0mm

DB166-5.0

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	15	-	10
接线范围 Wire Range	单芯线 Solid [AWG]	26~14		
	多芯线 Stranded [AWG]	26~14		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	250	400	630
额定电流	Rated Current [A]	24	24	24
额定冲击电压	Impulse withstand voltage [KV]	4	4	4
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	0.5~2.5		
	柔性导线 Flexible[mm²]	0.5~2.5		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	5.0/2~24		
剥线长度	Stripping Length [mm]	5~6		
螺丝/扭矩	Screw/Torque(Max)[N.m]	M3/0.5		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	250℃ /5S		
引针尺寸	Pin dimensions [mm]	0.7*1.0		
PCB板孔径	PCB Hole Diameter [mm]	∅1.5		

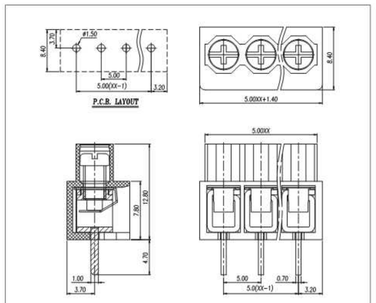





Pitch:7.5mm

DB166-7.5

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	15	-	10
接线范围 Wire Range	单芯线 Solid [AWG]	26~14		
	多芯线 Stranded [AWG]	26~14		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	450	630	1000
额定电流	Rated Current [A]	24	24	24
额定冲击电压	Impulse withstand voltage [KV]	6	6	6
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	0.5~2.5		
	柔性导线 Flexible[mm²]	0.5~2.5		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	7.5/2~18		
剥线长度	Stripping Length [mm]	5~6		
螺丝/扭矩	Screw/Torque(Max)[N.m]	M3/0.5		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	250℃ /5S		
引针尺寸	Pin dimensions [mm]	0.7*1.0		
PCB板孔径	PCB Hole Diameter [mm]	∅1.5		

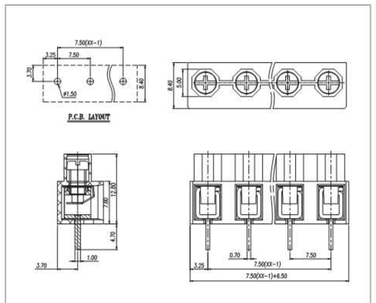





Pitch:5.0mm

DB167V-5.0

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	15	-	10
接线范围 Wire Range	单芯线 Solid [AWG]	26~12		
	多芯线 Stranded [AWG]	26~12		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	250	400	630
额定电流	Rated Current [A]	22	22	22
额定冲击电压	Impulse withstand voltage [KV]	4	4	4
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	0.5~2.5		
	柔性导线 Flexible[mm²]	0.5~2.5		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	5.0/2~24		
剥线长度	Stripping Length [mm]	6~7		
螺丝/扭矩	Screw/Torque(Max)[N.m]	M2.5/0.4		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	250℃ /5S		
引针尺寸	Pin dimensions [mm]	0.7*1.0		
PCB板孔径	PCB Hole Diameter [mm]	∅1.5		

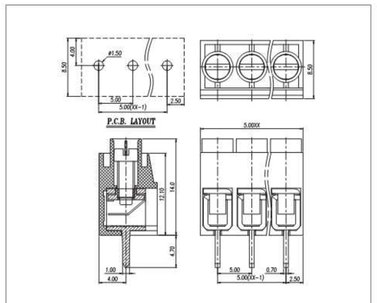





Pitch:5.0mm

DB167R-5.0

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	15	-	10
接线范围 Wire Range	单芯线 Solid [AWG]	26~12		
	多芯线 Stranded [AWG]	26~12		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	250	400	630
额定电流	Rated Current [A]	22	22	22
额定冲击电压	Impulse withstand voltage [KV]	4	4	4
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	0.5~2.5		
	柔性导线 Flexible[mm²]	0.5~2.5		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	5.0/2~24		
剥线长度	Stripping Length [mm]	6~7		
螺丝/扭矩	Screw/Torque(Max)[N.m]	M2.5/0.4		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	250℃ /5S		
引针尺寸	Pin dimensions [mm]	0.7*1.0		
PCB板孔径	PCB Hole Diameter [mm]	∅1.5		






Pitch:5.0/5.08mm

DB103-5.0/5.08

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	16	-	10
接线范围 Wire Range	单芯线 Solid [AWG]	24~12		
	多芯线 Stranded [AWG]	24~12		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	250	400	630
额定电流	Rated Current [A]	24	24	24
额定冲击电压	Impulse withstand voltage [KV]	4	4	4
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	0.5~2.5		
	柔性导线 Flexible[mm²]	0.5~2.5		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	5.0,5.08/2~24		
剥线长度	Stripping Length [mm]	6~7		
螺丝/扭矩	Screw/Torque(Max)[N.m]	M2.5/0.4		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	250℃ /5S		
引针尺寸	Pin dimensions [mm]	0.8*0.9		
PCB板孔径	PCB Hole Diameter [mm]	∅1.5		






Pitch:5.0mm

DB122-5.0

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	10	-	10
接线范围 Wire Range	单芯线 Solid [AWG]	22~14		
	多芯线 Stranded [AWG]	22~14		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	250	400	630
额定电流	Rated Current [A]	24	24	24
额定冲击电压	Impulse withstand voltage [KV]	4	4	4
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	0.5~2.5		
	柔性导线 Flexible[mm²]	0.5~2.5		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	5.0/2~24		
剥线长度	Stripping Length [mm]	6~7		
螺丝/扭矩	Screw/Torque(Max)[N.m]	M3/0.5		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	250℃ /5S		
引针尺寸	Pin dimensions [mm]	0.8*1.0		
PCB板孔径	PCB Hole Diameter [mm]	∅1.6		






Pitch:5.0/5.08mm

DB125V-5.0/5.08

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	16	-	10
接线范围 Wire Range	单芯线 Solid [AWG]	22~12		
	多芯线 Stranded [AWG]	22~12		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	250	400	630
额定电流	Rated Current [A]	18	18	18
额定冲击电压	Impulse withstand voltage [KV]	4	4	4
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	0.2~2.5		
	柔性导线 Flexible[mm²]	0.2~2.5		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	5.0,5.08/2~24		
剥线长度	Stripping Length [mm]	6~7		
螺丝/扭矩	Screw/Torque(Max)[N.m]	M2.5/0.4		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	250℃ /5S		
引针尺寸	Pin dimensions [mm]	0.8*1.0		
PCB板孔径	PCB Hole Diameter [mm]	∅1.5		






Pitch:5.0/5.08mm

DB125R-5.0/5.08

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	16	-	10
接线范围 Wire Range	单芯线 Solid [AWG]	22~12		
	多芯线 Stranded [AWG]	22~12		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	250	400	630
额定电流	Rated Current [A]	18	18	18
额定冲击电压	Impulse withstand voltage [KV]	4	4	4
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	0.2~2.5		
	柔性导线 Flexible[mm²]	0.2~2.5		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	5.0,5.08/2~24		
剥线长度	Stripping Length [mm]	6~7		
螺丝/扭矩	Screw/Torque(Max)[N.m]	M2.5/0.4		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	250℃ /5S		
引针尺寸	Pin dimensions [mm]	0.8*1.0		
PCB板孔径	PCB Hole Diameter [mm]	∅1.5		







Pitch:5.0/5.08mm

DB127V-5.0/5.08

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	12	-	10
接线范围 Wire Range	单芯线 Solid [AWG]	26~14		
	多芯线 Stranded [AWG]	26~14		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	250	400	630
额定电流	Rated Current [A]	17.5	17.5	17.5
额定冲击电压	Impulse withstand voltage [KV]	4	4	4
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	0.5~1.5		
	柔性导线 Flexible[mm²]	0.5~1.5		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	5.0,5.08/2~24		
剥线长度	Stripping Length [mm]	5~6		
螺丝/扭矩	Screw/Torque(Max)[N.m]	M2.5/0.4		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	250℃ /5S		
引针尺寸	Pin dimensions [mm]	0.6*0.9		
PCB板孔径	PCB Hole Diameter [mm]	∅1.3		






Pitch:5.0/5.08mm

DB127R-5.0/5.08

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	12	-	10
接线范围 Wire Range	单芯线 Solid [AWG]	26~14		
	多芯线 Stranded [AWG]	26~14		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	250	400	630
额定电流	Rated Current [A]	17.5	17.5	17.5
额定冲击电压	Impulse withstand voltage [KV]	4	4	4
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	0.5~1.5		
	柔性导线 Flexible[mm²]	0.5~1.5		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	5.0,5.08/2~24		
剥线长度	Stripping Length [mm]	5~6		
螺丝/扭矩	Screw/Torque(Max)[N.m]	M2.5/0.4		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	250℃ /5S		
引针尺寸	Pin dimensions [mm]	0.6*0.9		
PCB板孔径	PCB Hole Diameter [mm]	∅1.3		







Pitch:5.0mm

DB128V-5.0

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	16	-	10
接线范围 Wire Range	单芯线 Solid [AWG]	22~12		
	多芯线 Stranded [AWG]	22~12		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	250	400	630
额定电流	Rated Current [A]	24	24	24
额定冲击电压	Impulse withstand voltage [KV]	4	4	4
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	0.5~2.5		
	柔性导线 Flexible[mm²]	0.5~2.5		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	5.0/2~24		
剥线长度	Stripping Length [mm]	6~7		
螺丝/扭矩	Screw/Torque(Max)[N.m]	M2.5/0.4		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	250℃ /5S		
引针尺寸	Pin dimensions [mm]	0.8*0.9		
PCB板孔径	PCB Hole Diameter [mm]	∅1.5		






Pitch:7.5/7.62mm

DB128V-7.5/7.62

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	16	-	10
接线范围 Wire Range	单芯线 Solid [AWG]	22~12		
	多芯线 Stranded [AWG]	22~12		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	450	630	1000
额定电流	Rated Current [A]	20	20	20
额定冲击电压	Impulse withstand voltage [KV]	6	6	6
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	0.5~2.5		
	柔性导线 Flexible[mm²]	0.5~2.5		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	7.5,7.62/2~24		
剥线长度	Stripping Length [mm]	6~7		
螺丝/扭矩	Screw/Torque(Max)[N.m]	M2.5/0.4		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	250℃ /5S		
引针尺寸	Pin dimensions [mm]	0.8*0.9		
PCB板孔径	PCB Hole Diameter [mm]	∅1.5		






Pitch:5.0/5.08mm

DB128R-5.0

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	16		10
接线范围 Wire Range	单芯线 Solid [AWG]	22~12		
	多芯线 Stranded [AWG]	22~12		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	250	400	630
额定电流	Rated Current [A]	20	20	20
额定冲击电压	Impulse withstand voltage [KV]	4	4	4
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	0.5~2.5		
	柔性导线 Flexible[mm²]	0.5~2.5		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	5.0,5.08/2~24		
剥线长度	Stripping Length [mm]	6~7		
螺丝/扭矩	Screw/Torque(Max)[N.m]	M2.5/0.4		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	250℃ /5S		
引针尺寸	Pin dimensions [mm]	0.8*0.9		
PCB板孔径	PCB Hole Diameter [mm]	∅1.5		

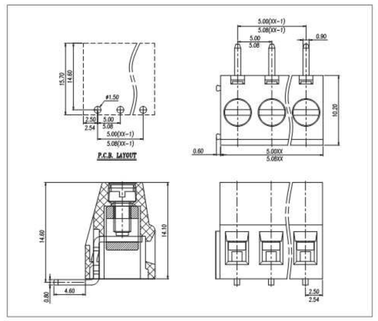




Pitch:7.5/7.62mm

DB128R-7.5/7.62

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	16	-	10
接线范围 Wire Range	单芯线 Solid [AWG]	22~12		
	多芯线 Stranded [AWG]	22~12		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	450	630	1000
额定电流	Rated Current [A]	20	20	20
额定冲击电压	Impulse withstand voltage [KV]	6	6	6
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	0.5~2.5		
	柔性导线 Flexible[mm²]	0.5~2.5		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	7.5,7.62/2~24		
剥线长度	Stripping Length [mm]	6~7		
螺丝/扭矩	Screw/Torque(Max)[N.m]	M2.5/0.4		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	250℃ /5S		
引针尺寸	Pin dimensions [mm]	0.8*0.9		
PCB板孔径	PCB Hole Diameter [mm]	∅1.5		

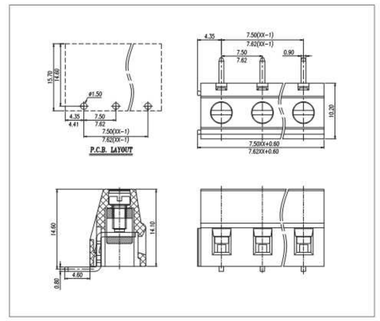





Pitch:5.0mm

DB128E-5.0

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	16	-	10
接线范围 Wire Range	单芯线 Solid [AWG]	22~12		
	多芯线 Stranded [AWG]	22~12		
耐电压	Dielectric Voltage-Withstand	1.5KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	250	400	630
额定电流	Rated Current [A]	24	24	24
额定冲击电压	Impulse withstand voltage [KV]	4	4	4
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	0.5~2.5		
	柔性导线 Flexible[mm²]	0.5~2.5		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	5.0/2~24		
剥线长度	Stripping Length [mm]	6~7		
螺丝/扭矩	Screw/Torque(Max)[N.m]	M2.5/0.4		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	250℃ /5S		
引针尺寸	Pin dimensions [mm]	0.8*0.9		
PCB板孔径	PCB Hole Diameter [mm]	∅1.5		

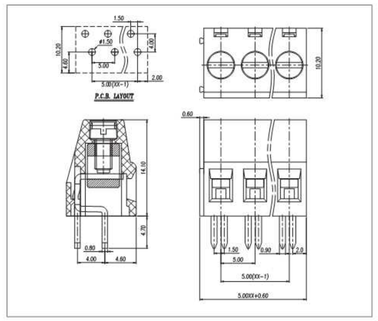




Pitch:7.5mm

DB128E-7.5

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	16	-	10
接线范围 Wire Range	单芯线 Solid [AWG]	22~12		
	多芯线 Stranded [AWG]	22~12		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	450	630	1000
额定电流	Rated Current [A]	24	24	24
额定冲击电压	Impulse withstand voltage [KV]	6	6	6
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	0.5~2.5		
	柔性导线 Flexible[mm²]	0.5~2.5		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	7.5/2~24		
剥线长度	Stripping Length [mm]	6~7		
螺丝/扭矩	Screw/Torque(Max)[N.m]	M2.5/0.4		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	250℃ /5S		
引针尺寸	Pin dimensions [mm]	0.8*0.9		
PCB板孔径	PCB Hole Diameter [mm]	∅1.5		







Pitch:5.0/5.08mm

DB129V-5.0/5.08

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	20	-	10
接线范围 Wire Range	单芯线 Solid [AWG]	26~12		
	多芯线 Stranded [AWG]	26~12		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	250	400	630
额定电流	Rated Current [A]	24	24	24
额定冲击电压	Impulse withstand voltage [KV]	4	4	4
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	0.5~2.5		
	柔性导线 Flexible[mm²]	0.5~2.5		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	5.0, 5.08/2~24		
剥线长度	Stripping Length [mm]	6~7		
螺丝/扭矩	Screw/Torque(Max)[N.m]	M3/0.5		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	250℃ /5S		
引针尺寸	Pin dimensions [mm]	0.8*1.0		
PCB板孔径	PCB Hole Diameter [mm]	∅1.5		

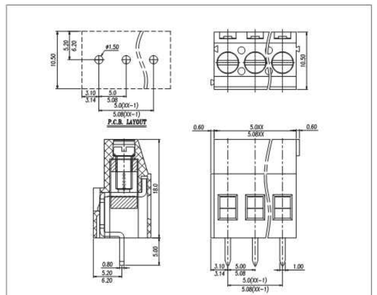




Pitch:7.5/7.62mm

DB129V-7.5/7.62

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	150	300
额定电流	Rated Current [A]	20	20	10
接线范围 Wire Range	单芯线 Solid [AWG]	26~12		
	多芯线 Stranded [AWG]	26~12		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	450	630	1000
额定电流	Rated Current [A]	24	24	24
额定冲击电压	Impulse withstand voltage [KV]	6	6	6
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	0.5~2.5		
	柔性导线 Flexible[mm²]	0.5~2.5		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	7.5, 7.62/2~24		
剥线长度	Stripping Length [mm]	6~7		
螺丝/扭矩	Screw/Torque(Max)[N.m]	M3/0.5		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	250℃ /5S		
引针尺寸	Pin dimensions [mm]	0.8*1.0		
PCB板孔径	PCB Hole Diameter [mm]	∅1.5		

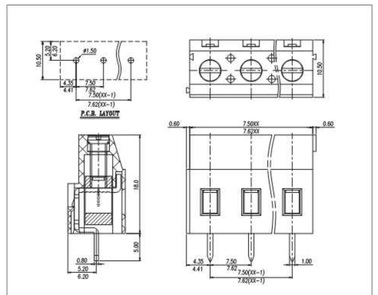




Pitch:5.0/5.08mm

DB129R-5.0/5.08

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	20	-	10
接线范围 Wire Range	单芯线 Solid [AWG]	26~12		
	多芯线 Stranded [AWG]	26~12		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	250	400	630
额定电流	Rated Current [A]	24	24	24
额定冲击电压	Impulse withstand voltage [KV]	4	4	4
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	0.5~2.5		
	柔性导线 Flexible[mm²]	0.5~2.5		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	5.0, 5.08/2~24		
剥线长度	Stripping Length [mm]	6~7		
螺丝/扭矩	Screw/Torque(Max)[N.m]	M3/0.5		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	250℃ /5S		
引针尺寸	Pin dimensions [mm]	0.8*1.0		
PCB板孔径	PCB Hole Diameter [mm]	∅1.5		






Pitch:7.5/7.62mm

DB129R-7.5/7.62

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	150	300
额定电流	Rated Current [A]	20	20	10
接线范围 Wire Range	单芯线 Solid [AWG]	26~12		
	多芯线 Stranded [AWG]	26~12		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	450	630	1000
额定电流	Rated Current [A]	24	24	24
额定冲击电压	Impulse withstand voltage [KV]	6	6	6
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	0.5~2.5		
	柔性导线 Flexible[mm²]	0.5~2.5		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	7.5,7.62/2~24		
剥线长度	Stripping Length [mm]	6~7		
螺丝/扭矩	Screw/Torque(Max)[N.m]	M3/0.5		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	250℃ /5S		
引针尺寸	Pin dimensions [mm]	0.8*1.0		
PCB板孔径	PCB Hole Diameter [mm]	∅1.5		

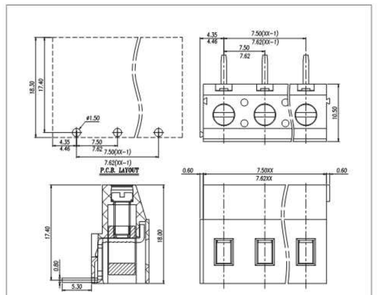




Pitch:5.0/5.08mm

DB130-5.0/5.08

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	20	-	10
接线范围 Wire Range	单芯线 Solid [AWG]	26~12		
	多芯线 Stranded [AWG]	26~12		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	250	400	630
额定电流	Rated Current [A]	24	24	24
额定冲击电压	Impulse withstand voltage [KV]	4	4	4
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	0.5~2.5		
	柔性导线 Flexible[mm²]	0.5~2.5		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	5.0,5.08/2~24		
剥线长度	Stripping Length [mm]	6~7		
螺丝/扭矩	Screw/Torque(Max)[N.m]	M3/0.5		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	250℃ /5S		
引针尺寸	Pin dimensions [mm]	0.8*1.0		
PCB板孔径	PCB Hole Diameter [mm]	∅1.5		

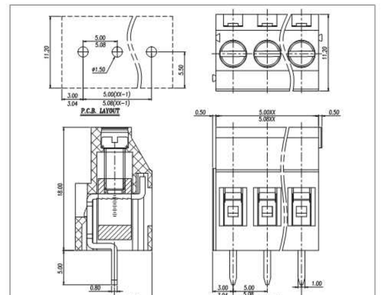




Pitch:7.5/7.62mm

DB130-7.5/7.62

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	150	300
额定电流	Rated Current [A]	20	20	10
接线范围 Wire Range	单芯线 Solid [AWG]	26~12		
	多芯线 Stranded [AWG]	26~12		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	450	630	1000
额定电流	Rated Current [A]	24	24	24
额定冲击电压	Impulse withstand voltage [KV]	6	6	6
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	0.5~2.5		
	柔性导线 Flexible[mm²]	0.5~2.5		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	7.5,7.62/2~18		
剥线长度	Stripping Length [mm]	6~7		
螺丝/扭矩	Screw/Torque(Max)[N.m]	M3/0.5		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	250℃ /5S		
引针尺寸	Pin dimensions [mm]	0.8*1.0		
PCB板孔径	PCB Hole Diameter [mm]	∅1.5		






Pitch:5.0/5.08mm

DB130T-5.0/5.08

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	20	-	10
接线范围 Wire Range	单芯线 Solid [AWG]	26~12		
	多芯线 Stranded [AWG]	26~12		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	250	400	630
额定电流	Rated Current [A]	20	20	20
额定冲击电压	Impulse withstand voltage [KV]	4	4	4
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	0.5~2.5		
	柔性导线 Flexible[mm²]	0.5~2.5		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	5.0,5.08/2*2~2*24		
剥线长度	Stripping Length [mm]	6~7		
螺丝/扭矩	Screw/Torque(Max)[N.m]	M3/0.5		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	250℃ /5S		
引针尺寸	Pin dimensions [mm]	0.8*1.0		
PCB板孔径	PCB Hole Diameter [mm]	∅1.5		






Pitch:5.0/5.08mm

DB130A-5.0/5.08

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	20	-	10
接线范围 Wire Range	单芯线 Solid [AWG]	26~12		
	多芯线 Stranded [AWG]	26~12		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	250	400	630
额定电流	Rated Current [A]	20	20	20
额定冲击电压	Impulse withstand voltage [KV]	4	4	4
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	0.5~2.5		
	柔性导线 Flexible[mm²]	0.5~2.5		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	5.0,5.08/2*2~2*24		
剥线长度	Stripping Length [mm]	6~7		
螺丝/扭矩	Screw/Torque(Max)[N.m]	M3/0.5		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	250℃ /5S		
引针尺寸	Pin dimensions [mm]	0.8*1.0		
PCB板孔径	PCB Hole Diameter [mm]	∅1.5		






Pitch:5.0/5.08mm

DB130B-5.0/5.08

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	20	-	10
接线范围 Wire Range	单芯线 Solid [AWG]	26~12		
	多芯线 Stranded [AWG]	26~12		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	250	400	630
额定电流	Rated Current [A]	20	20	20
额定冲击电压	Impulse withstand voltage [KV]	4	4	4
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	0.5~2.5		
	柔性导线 Flexible[mm²]	0.5~2.5		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	5.0,5.08/2*2~2*24		
剥线长度	Stripping Length [mm]	6~7		
螺丝/扭矩	Screw/Torque(Max)[N.m]	M3/0.5		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	250℃ /5S		
引针尺寸	Pin dimensions [mm]	0.8*1.0		
PCB板孔径	PCB Hole Diameter [mm]	∅1.5		






Pitch:5.0/5.08mm

DB130A3-5.0/5.08

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	20	-	10
接线范围 Wire Range	单芯线 Solid [AWG]	26~12		
	多芯线 Stranded [AWG]	26~12		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	250	400	630
额定电流	Rated Current [A]	17.5	17.5	17.5
额定冲击电压	Impulse withstand voltage [KV]	4	4	4
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	0.5~2.5		
	柔性导线 Flexible[mm²]	0.5~2.5		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	5.0,5.08/3*2~3*24		
剥线长度	Stripping Length [mm]	6~7		
螺丝/扭矩	Screw/Torque(Max)[N.m]	M3/0.5		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	250℃ /5S		
引针尺寸	Pin dimensions [mm]	0.8*1.0		
PCB板孔径	PCB Hole Diameter [mm]	∅1.5		






Pitch:5.08mm

DB131-5.08

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	20	-	10
接线范围 Wire Range	单芯线 Solid [AWG]	26~12		
	多芯线 Stranded [AWG]	26~12		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	250	400	630
额定电流	Rated Current [A]	20	20	20
额定冲击电压	Impulse withstand voltage [KV]	4	4	4
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	0.2~2.5		
	柔性导线 Flexible[mm²]	0.2~2.5		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	5.08/2~24		
剥线长度	Stripping Length [mm]	10~11		
螺丝/扭矩	Screw/Torque(Max)[N.m]	M3/0.5		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	250℃ /5S		
引针尺寸	Pin dimensions [mm]	0.9*1.0		
PCB板孔径	PCB Hole Diameter [mm]	∅1.6		






Pitch:6.35mm

DB910-6.35

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	30	-	10
接线范围 Wire Range	单芯线 Solid [AWG]	26~10		
	多芯线 Stranded [AWG]	26~10		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	400	630	1000
额定电流	Rated Current [A]	32	32	32
额定冲击电压	Impulse withstand voltage [KV]	6	6	6
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	0.5~4.0		
	柔性导线 Flexible[mm²]	0.5~4.0		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	6.35/2~24		
剥线长度	Stripping Length [mm]	6~7		
螺丝/扭矩	Screw/Torque(Max)[N.m]	M3/0.5		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	250℃ /5S		
引针尺寸	Pin dimensions [mm]	0.8*1.0		
PCB板孔径	PCB Hole Diameter [mm]	∅1.5		






Pitch:6.35mm

DB910K-6.35

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	600	600	600
额定电流	Rated Current [A]	30	30	5
接线范围 Wire Range	单芯线 Solid [AWG]	24~10		
	多芯线 Stranded [AWG]	24~10		
耐电压	Dielectric Voltage-Withstand	2.2KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	800	1000	1000
额定电流	Rated Current [A]	41	41	41
额定冲击电压	Impulse withstand voltage [KV]	8	8	8
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	0.2~6.0		
	柔性导线 Flexible[mm²]	0.2~4.0		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	6.35/2~18		
剥线长度	Stripping Length [mm]	8		
螺丝/扭矩	Screw/Torque(Max)[N.m]	M3/0.5		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	250℃ /5S		
引针尺寸	Pin dimensions [mm]	0.9*0.9		
PCB板孔径	PCB Hole Diameter [mm]	∅1.5		






Pitch:6.35mm

DB910B-6.35

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	30	-	10
接线范围 Wire Range	单芯线 Solid [AWG]	26~10		
	多芯线 Stranded [AWG]	26~10		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	400	630	1000
额定电流	Rated Current [A]	32	32	32
额定冲击电压	Impulse withstand voltage [KV]	6	6	6
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	0.5~4.0		
	柔性导线 Flexible[mm²]	0.5~4.0		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	6.35/2~24		
剥线长度	Stripping Length [mm]	7~8		
螺丝/扭矩	Screw/Torque(Max)[N.m]	M3/0.5		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	250℃ /5S		
引针尺寸	Pin dimensions [mm]	0.8*1.0		
PCB板孔径	PCB Hole Diameter [mm]	∅1.5		






Pitch:7.5mm

DB910-7.5

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	30	-	10
接线范围 Wire Range	单芯线 Solid [AWG]	26~10		
	多芯线 Stranded [AWG]	26~10		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	450	630	1000
额定电流	Rated Current [A]	32	32	32
额定冲击电压	Impulse withstand voltage [KV]	6	6	6
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	0.5~4.0		
	柔性导线 Flexible[mm²]	0.5~4.0		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	7.5/2~24		
剥线长度	Stripping Length [mm]	7		
螺丝/扭矩	Screw/Torque(Max)[N.m]	M3/0.5		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	250℃ /5S		
引针尺寸	Pin dimensions [mm]	0.8*1.0		
PCB板孔径	PCB Hole Diameter [mm]	∅1.5		






Pitch:7.62mm

DB910-7.62

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	30	-	10
接线范围 Wire Range	单芯线 Solid [AWG]	26~10		
	多芯线 Stranded [AWG]	26~10		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	500	630	1000
额定电流	Rated Current [A]	32	32	32
额定冲击电压	Impulse withstand voltage [KV]	6	6	6
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	0.5~4.0		
	柔性导线 Flexible[mm²]	0.5~4.0		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	7.62/2~24		
剥线长度	Stripping Length [mm]	6~7		
螺丝/扭矩	Screw/Torque(Max)[N.m]	M3/0.5		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	250℃ /5S		
引针尺寸	Pin dimensions [mm]	0.8*1.0		
PCB板孔径	PCB Hole Diameter [mm]	∅1.5		

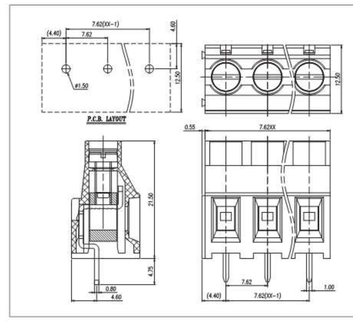





Pitch:9.52mm

DB910-9.52

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	300	300
额定电流	Rated Current [A]	30	30	10
接线范围 Wire Range	单芯线 Solid [AWG]	26~10		
	多芯线 Stranded [AWG]	26~10		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	630	1000	1000
额定电流	Rated Current [A]	32	32	32
额定冲击电压	Impulse withstand voltage [KV]	8	8	8
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	0.5~4.0		
	柔性导线 Flexible[mm²]	0.5~4.0		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	9.5/2~24		
剥线长度	Stripping Length [mm]	6~7		
螺丝/扭矩	Screw/Torque(Max)[N.m]	M3/0.5		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	250℃ /5S		
引针尺寸	Pin dimensions [mm]	0.8*1.0		
PCB板孔径	PCB Hole Diameter [mm]	∅1.5		

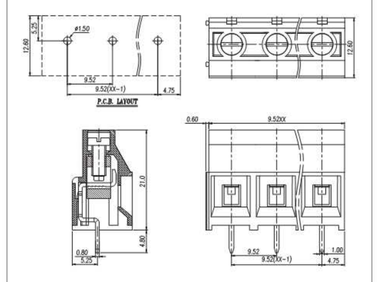




Pitch:10.16mm

DB135-10.16

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	300	600
额定电流	Rated Current [A]	52	52	5
接线范围 Wire Range	单芯线 Solid [AWG]	20~6		
	多芯线 Stranded [AWG]	20~6		
耐电压	Dielectric Voltage-Withstand	2.2KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	630	1000	1000
额定电流	Rated Current [A]	57	57	57
额定冲击电压	Impulse withstand voltage [KV]	8	8	8
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	2.5~10		
	柔性导线 Flexible[mm²]	2.5~10		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	10.16/2~24		
剥线长度	Stripping Length [mm]	10		
螺丝/扭矩	Screw/Torque(Max)[N.m]	M4/1.2		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	250℃ /5S		
引针尺寸	Pin dimensions [mm]	1.2*1.6		
PCB板孔径	PCB Hole Diameter [mm]	∅2.40		






Pitch:10.16mm

DB116-10.16

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	600	600	600
额定电流	Rated Current [A]	65	65	5
接线范围 Wire Range	单芯线 Solid [AWG]	20~6		
	多芯线 Stranded [AWG]	20~6		
耐电压	Dielectric Voltage-Withstand	2.2KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	630	1000	1000
额定电流	Rated Current [A]	57	57	57
额定冲击电压	Impulse withstand voltage [KV]	8	8	8
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	2.5~16		
	柔性导线 Flexible[mm²]	2.5~16		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	10.16/2~16		
剥线长度	Stripping Length [mm]	11~12		
螺丝/扭矩	Screw/Torque(Max)[N.m]	M4/1.2		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	250℃ /5S		
引针尺寸	Pin dimensions [mm]	1.0*1.0		
PCB板孔径	PCB Hole Diameter [mm]	∅1.7		

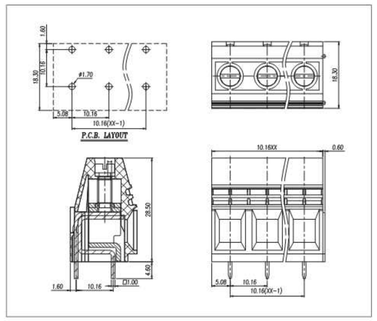




Pitch:10.16mm

DB116K-10.16

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	600	600	600
额定电流	Rated Current [A]	65	65	5
接线范围 Wire Range	单芯线 Solid [AWG]	20~6		
	多芯线 Stranded [AWG]	20~6		
耐电压	Dielectric Voltage-Withstand	2.2KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	630	1000	1000
额定电流	Rated Current [A]	76	76	76
额定冲击电压	Impulse withstand voltage [KV]	8	8	8
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	2.5~16		
	柔性导线 Flexible[mm²]	2.5~16		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	10.16/1~14		
剥线长度	Stripping Length [mm]	10		
螺丝/扭矩	Screw/Torque(Max)[N.m]	M4/1.2		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	250℃ /5S		
引针尺寸	Pin dimensions [mm]	0.9*1.0		
PCB板孔径	PCB Hole Diameter [mm]	∅1.6		






Pitch:12.7mm

DB116K-12.7

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	600	600	600
额定电流	Rated Current [A]	65	65	5
接线范围 Wire Range	单芯线 Solid [AWG]	20~6		
	多芯线 Stranded [AWG]	20~6		
耐电压	Dielectric Voltage-Withstand	2.2KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	630	1000	1000
额定电流	Rated Current [A]	76	76	76
额定冲击电压	Impulse withstand voltage [KV]	8	8	8
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	2.5~16		
	柔性导线 Flexible[mm²]	2.5~16		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	12.7/2~14		
剥线长度	Stripping Length [mm]	10		
螺丝/扭矩	Screw/Torque(Max)[N.m]	M4/1.2		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	250℃ /5S		
引针尺寸	Pin dimensions [mm]	0.9*1.0		
PCB板孔径	PCB Hole Diameter [mm]	∅1.6		






Pitch:12.7mm

DB117-12.7

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	600	600	600
额定电流	Rated Current [A]	65	65	5
接线范围 Wire Range	单芯线 Solid [AWG]	20~6		
	多芯线 Stranded [AWG]	20~6		
耐电压	Dielectric Voltage-Withstand	2.2KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	1000	1000	1000
额定电流	Rated Current [A]	57	57	57
额定冲击电压	Impulse withstand voltage [KV]	8	8	8
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	2.5~16		
	柔性导线 Flexible[mm²]	2.5~16		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	12.7/2-16		
剥线长度	Stripping Length [mm]	11~12		
螺丝/扭矩	Screw/Torque(Max)[N.m]	M4/1.2		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	250℃ /5S		
引针尺寸	Pin dimensions [mm]	1.0*1.0		
PCB板孔径	PCB Hole Diameter [mm]	∅1.7		

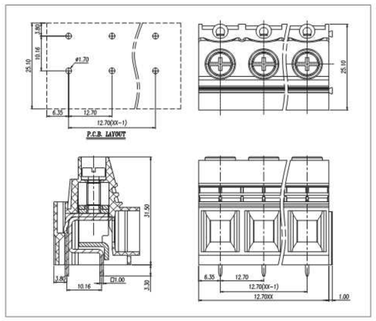




Pitch:5.0mm

DB102-5.0

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	-
额定电流	Rated Current [A]	15	-	-
接线范围 Wire Range	单芯线 Solid [AWG]	28~14		
	多芯线 Stranded [AWG]	28~14		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	250	400	630
额定电流	Rated Current [A]	18	18	18
额定冲击电压	Impulse withstand voltage [KV]	4	4	4
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	0.5~2.5		
	柔性导线 Flexible[mm²]	0.5~2.5		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	5.0/2~24		
剥线长度	Stripping Length [mm]	4.5~5		
螺丝/扭矩	Screw/Torque(Max)[N.m]	M2.5/0.4		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	250℃ /5S		
引针尺寸	Pin dimensions [mm]	0.8*1.0		
PCB板孔径	PCB Hole Diameter [mm]	∅1.5		






Pitch:10.0mm

DB410-10.0

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	20	-	10
接线范围 Wire Range	单芯线 Solid [AWG]	26~12		
	多芯线 Stranded [AWG]	26~12		
耐电压	Dielectric Voltage-Withstand	2KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	250	400	630
额定电流	Rated Current [A]	24	24	24
额定冲击电压	Impulse withstand voltage [KV]	6	6	6
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	0.5~2.5		
	柔性导线 Flexible[mm²]	0.5~2.5		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	10.0/1~24		
剥线长度	Stripping Length [mm]	4.5-5		
螺丝/扭矩	Screw/Torque(Max)[N.m]	M3/0.5		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	250℃ /5S		
引针尺寸	Pin dimensions [mm]	/		
PCB板孔径	PCB Hole Diameter [mm]	/		







Pitch:10.0mm

DB411-10.0

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	30	-	10
接线范围 Wire Range	单芯线 Solid [AWG]	26~10		
	多芯线 Stranded [AWG]	26~10		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	250	400	630
额定电流	Rated Current [A]	32	32	32
额定冲击电压	Impulse withstand voltage [KV]	6	6	6
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	0.5~4.0		
	柔性导线 Flexible[mm²]	0.5~4.0		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	10.0/1~24		
剥线长度	Stripping Length [mm]	4.5~5		
螺丝/扭矩	Screw/Torque(Max)[N.m]	M4/1.2		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	250℃ /5S		
引针尺寸	Pin dimensions [mm]	/		
PCB板孔径	PCB Hole Diameter [mm]	/		







Pitch:3.5/3.81mm

DB127S-3.5/3.81

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	10	-	10
接线范围 Wire Range	单芯线 Solid [AWG]	26~16		
	多芯线 Stranded [AWG]	26~16		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	160	200	400
额定电流	Rated Current [A]	10	10	10
额定冲击电压	Impulse withstand voltage [KV]	2.5	2.5	2.5
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	0.2~1.5		
	柔性导线 Flexible[mm²]	0.2~1.5		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	3.5,3.81/2~24		
剥线长度	Stripping Length [mm]	5		
螺丝/扭矩	Screw/Torque(Max)[N.m]	M2/0.2		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	250℃ /5S		
引针尺寸	Pin dimensions [mm]	0.5*0.8		
PCB板孔径	PCB Hole Diameter [mm]	∅1.1		






Pitch:5.08mm

DB127S-5.08

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	15	-	10
接线范围 Wire Range	单芯线 Solid [AWG]	26~14		
	多芯线 Stranded [AWG]	26~14		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	250	400	630
额定电流	Rated Current [A]	17.5	17.5	17.5
额定冲击电压	Impulse withstand voltage [KV]	4	4	4
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	0.5~1.5		
	柔性导线 Flexible[mm²]	0.5~1.5		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	5.08/2~24		
剥线长度	Stripping Length [mm]	6~7		
螺丝/扭矩	Screw/Torque(Max)[N.m]	M3/0.5		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	250℃ /5S		
引针尺寸	Pin dimensions [mm]	0.5*1.0		
PCB板孔径	PCB Hole Diameter [mm]	∅1.4		






Pitch:5.0mm

DB127A-5.0

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	12	-	10
接线范围 Wire Range	单芯线 Solid [AWG]	26~14		
	多芯线 Stranded [AWG]	26~14		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	160	250	400
额定电流	Rated Current [A]	17.5	17.5	17.5
额定冲击电压	Impulse withstand voltage [KV]	4	4	4
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	0.5~1.5		
	柔性导线 Flexible[mm²]	0.5~1.5		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	5.0/2*2~2*24		
剥线长度	Stripping Length [mm]	5~6		
螺丝/扭矩	Screw/Torque(Max)[N.m]	M2.5/0.4		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	250℃ /5S		
引针尺寸	Pin dimensions [mm]	0.5*0.9		
PCB板孔径	PCB Hole Diameter [mm]	∅1.3		







Pitch:5.08mm

DB127A-5.08

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	12	-	10
接线范围 Wire Range	单芯线 Solid [AWG]	26~14		
	多芯线 Stranded [AWG]	26~14		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	160	250	400
额定电流	Rated Current [A]	17.5	17.5	17.5
额定冲击电压	Impulse withstand voltage [KV]	4	4	4
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	0.5~1.5		
	柔性导线 Flexible[mm²]	0.5~1.5		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	5.08/2*2~2*30		
剥线长度	Stripping Length [mm]	5~6		
螺丝/扭矩	Screw/Torque(Max)[N.m]	M3/0.5		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	250℃ /5S		
引针尺寸	Pin dimensions [mm]	0.5*0.9		
PCB板孔径	PCB Hole Diameter [mm]	∅1.3		







Pitch:2.54mm

DB125-2.54

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	150	-	-
额定电流	Rated Current [A]	7	-	-
接线范围 Wire Range	单芯线 Solid [AWG]	26~18		
	多芯线 Stranded [AWG]	26~18		
耐电压	Dielectric Voltage-Withstand	1.3KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	63	130	320
额定电流	Rated Current [A]	8	8	8
额定冲击电压	Impulse withstand voltage [KV]	1.5	1.5	2.5
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	0.5~1.0		
	柔性导线 Flexible[mm²]	0.5~1.0		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	2.54/2~24		
剥线长度	Stripping Length [mm]	4~5		
螺丝/扭矩	Screw/Torque(Max)[N.m]	M1.6/0.1		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	250℃ /5S		
引针尺寸	Pin dimensions [mm]	0.5*0.8		
PCB板孔径	PCB Hole Diameter [mm]	∅1.0		






Pitch:3.5/3.81mm

DB125-3.5/3.81

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	10	-	10
接线范围 Wire Range	单芯线 Solid [AWG]	28~16		
	多芯线 Stranded [AWG]	28~16		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	160	200	400
额定电流	Rated Current [A]	13.5	13.5	13.5
额定冲击电压	Impulse withstand voltage [KV]	2.5	2.5	2.5
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	0.5~1.0		
	柔性导线 Flexible[mm²]	0.5~1.0		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	3.5,3.81/2~24		
剥线长度	Stripping Length [mm]	4~5		
螺丝/扭矩	Screw/Torque(Max)[N.m]	M2/0.2		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	250℃ /5S		
引针尺寸	Pin dimensions [mm]	0.5*0.9		
PCB板孔径	PCB Hole Diameter [mm]	∅1.3		







Pitch:3.5/3.81mm

DB125H-3.5/3.81

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	10	-	10
接线范围 Wire Range	单芯线 Solid [AWG]	28~16		
	多芯线 Stranded [AWG]	28~16		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	160	200	400
额定电流	Rated Current [A]	13.5	13.5	13.5
额定冲击电压	Impulse withstand voltage [KV]	2.5	2.5	2.5
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	0.5~1.0		
	柔性导线 Flexible[mm²]	0.5~1.0		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	3.5,3.81/2~24		
剥线长度	Stripping Length [mm]	4~5		
螺丝/扭矩	Screw/Torque(Max)[N.m]	M2/0.2		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	250℃ /5S		
引针尺寸	Pin dimensions [mm]	0.5*0.9		
PCB板孔径	PCB Hole Diameter [mm]	∅1.3		






Pitch:3.5/3.81mm

DB125A-3.5/3.81

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	10	-	10
接线范围 Wire Range	单芯线 Solid [AWG]	28~16		
	多芯线 Stranded [AWG]	28~16		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	160	200	400
额定电流	Rated Current [A]	13.5	13.5	13.5
额定冲击电压	Impulse withstand voltage [KV]	2.5	2.5	2.5
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	0.5~1.0		
	柔性导线 Flexible[mm²]	0.5~1.0		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	3.5,3.81/2*2~2*24		
剥线长度	Stripping Length [mm]	4~5		
螺丝/扭矩	Screw/Torque(Max)[N.m]	M2/0.2		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	250℃ /5S		
引针尺寸	Pin dimensions [mm]	0.5*0.9		
PCB板孔径	PCB Hole Diameter [mm]	∅1.3		







Pitch:3.5/3.81mm

DB125B-3.5/3.81

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	10	-	10
接线范围 Wire Range	单芯线 Solid [AWG]	28~16		
	多芯线 Stranded [AWG]	28~16		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	160	200	400
额定电流	Rated Current [A]	13.5	13.5	13.5
额定冲击电压	Impulse withstand voltage [KV]	2.5	2.5	2.5
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	0.5~1.0		
	柔性导线 Flexible[mm²]	0.5~1.0		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	3.5,3.81/2*2-2*24		
剥线长度	Stripping Length [mm]	4~5		
螺丝/扭矩	Screw/Torque(Max)[N.m]	M2/0.2		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	250℃/5S		
引针尺寸	Pin dimensions [mm]	0.5*0.9		
PCB板孔径	PCB Hole Diameter [mm]	∅1.3		






Pitch:5.0/5.08mm

DB128L-5.0/5.08

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	15	-	10
接线范围 Wire Range	单芯线 Solid [AWG]	30~14		
	多芯线 Stranded [AWG]	30~14		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	250	400	630
额定电流	Rated Current [A]	24	24	24
额定冲击电压	Impulse withstand voltage [KV]	4	4	4
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	0.5~2.5		
	柔性导线 Flexible[mm²]	0.5~2.5		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	5.0,5.08/2~24		
剥线长度	Stripping Length [mm]	6~7		
螺丝/扭矩	Screw/Torque(Max)[N.m]	M2.5/0.4		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	250℃ /5S		
引针尺寸	Pin dimensions [mm]	0.8*0.9		
PCB板孔径	PCB Hole Diameter [mm]	∅1.5		






Pitch:5.0/5.08mm

DB128H-5.0/5.08

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	15	-	10
接线范围 Wire Range	单芯线 Solid [AWG]	30~14		
	多芯线 Stranded [AWG]	30~14		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	250	400	630
额定电流	Rated Current [A]	24	24	24
额定冲击电压	Impulse withstand voltage [KV]	4	4	4
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	0.5~2.5		
	柔性导线 Flexible[mm²]	0.5~2.5		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	5.0,5.08/2~24		
剥线长度	Stripping Length [mm]	6~7		
螺丝/扭矩	Screw/Torque(Max)[N.m]	M2.5/0.4		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	250℃ /5S		
引针尺寸	Pin dimensions [mm]	0.8*0.9		
PCB板孔径	PCB Hole Diameter [mm]	∅1.5		






Pitch:5.0/5.08mm

DB128HH-5.0/5.08

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	15	-	10
接线范围 Wire Range	单芯线 Solid [AWG]	30~14		
	多芯线 Stranded [AWG]	30~14		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	250	400	630
额定电流	Rated Current [A]	24	24	24
额定冲击电压	Impulse withstand voltage [KV]	4	4	4
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	0.5~2.5		
	柔性导线 Flexible[mm²]	0.5~2.5		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	5.0,5.08/2~24		
剥线长度	Stripping Length [mm]	6~7		
螺丝/扭矩	Screw/Torque(Max)[N.m]	M2.5/0.4		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	250℃ /5S		
引针尺寸	Pin dimensions [mm]	0.8*0.9		
PCB板孔径	PCB Hole Diameter [mm]	∅1.5		






Pitch:5.0/5.08mm

DB128A-5.0/5.08

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	15	-	10
接线范围 Wire Range	单芯线 Solid [AWG]	30~14		
	多芯线 Stranded [AWG]	30~14		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	250	400	630
额定电流	Rated Current [A]	24	24	24
额定冲击电压	Impulse withstand voltage [KV]	4	4	4
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	0.5~2.5		
	柔性导线 Flexible[mm²]	0.5~2.5		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	5.0,5.08/2*2~2*24		
剥线长度	Stripping Length [mm]	6~7		
螺丝/扭矩	Screw/Torque(Max)[N.m]	M2.5/0.4		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	250℃ /5S		
引针尺寸	Pin dimensions [mm]	0.8*0.9		
PCB板孔径	PCB Hole Diameter [mm]	∅1.5		






Pitch:5.0/5.08mm

DB128B-5.0/5.08

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	15	-	10
接线范围 Wire Range	单芯线 Solid [AWG]	30~14		
	多芯线 Stranded [AWG]	30~14		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	250	400	630
额定电流	Rated Current [A]	24	24	24
额定冲击电压	Impulse withstand voltage [KV]	4	4	4
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	0.5~2.5		
	柔性导线 Flexible[mm²]	0.5~2.5		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	5.0,5.08/2*2~2*24		
剥线长度	Stripping Length [mm]	6-7		
螺丝/扭矩	Screw/Torque(Max)[N.m]	M2.5/0.4		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	250℃ /5S		
引针尺寸	Pin dimensions [mm]	0.8*0.9		
PCB板孔径	PCB Hole Diameter [mm]	∅1.5		






Pitch:5.0/5.08mm

DB128A2-5.08/5.08

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	15	-	10
接线范围 Wire Range	单芯线 Solid [AWG]	30~14		
	多芯线 Stranded [AWG]	30~14		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	250	400	630
额定电流	Rated Current [A]	24	24	24
额定冲击电压	Impulse withstand voltage [KV]	4	4	4
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	0.5~2.5		
	柔性导线 Flexible[mm²]	0.5~2.5		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	5.0,5.08/2*2~2*24		
剥线长度	Stripping Length [mm]	6-7		
螺丝/扭矩	Screw/Torque(Max)[N.m]	M2.5/0.4		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	250℃ /5S		
引针尺寸	Pin dimensions [mm]	0.8*0.9		
PCB板孔径	PCB Hole Diameter [mm]	∅1.5		






Pitch:5.0/5.08mm

DB128B2-5.0/5.08

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	15	-	10
接线范围 Wire Range	单芯线 Solid [AWG]	30~14		
	多芯线 Stranded [AWG]	30~14		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	250	400	630
额定电流	Rated Current [A]	24	24	24
额定冲击电压	Impulse withstand voltage [KV]	4	4	4
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	0.5~2.5		
	柔性导线 Flexible[mm²]	0.5~2.5		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	5.0,5.08/2*2~2*24		
剥线长度	Stripping Length [mm]	6~7		
螺丝/扭矩	Screw/Torque(Max)[N.m]	M2.5/0.4		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	250℃ /5S		
引针尺寸	Pin dimensions [mm]	0.8*0.9		
PCB板孔径	PCB Hole Diameter [mm]	∅1.5		






Pitch:5.0/5.08mm

DB128A3-5.0/5.08

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	15	-	10
接线范围 Wire Range	单芯线 Solid [AWG]	30~14		
	多芯线 Stranded [AWG]	30~14		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	250	400	630
额定电流	Rated Current [A]	18	18	18
额定冲击电压	Impulse withstand voltage [KV]	4	4	4
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	0.5~2.5		
	柔性导线 Flexible[mm²]	0.5~2.5		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	5.0,5.08/ 3*2~3*24		
剥线长度	Stripping Length [mm]	6~7		
螺丝/扭矩	Screw/Torque(Max)[N.m]	M2.5/0.4		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	250℃ /5S		
引针尺寸	Pin dimensions [mm]	0.8*0.9		
PCB板孔径	PCB Hole Diameter [mm]	∅1.5		






Pitch:5.0/5.08mm

DB128B3-5.0/5.08

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	15	-	10
接线范围 Wire Range	单芯线 Solid [AWG]	30~14		
	多芯线 Stranded [AWG]	30~14		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	250	400	630
额定电流	Rated Current [A]	18	18	18
额定冲击电压	Impulse withstand voltage [KV]	4	4	4
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	0.5~2.5		
	柔性导线 Flexible[mm²]	0.5~2.5		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	5.0,5.08/ 3*2~3*24		
剥线长度	Stripping Length [mm]	6-7		
螺丝/扭矩	Screw/Torque(Max)[N.m]	M2.5/0.4		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	250℃ /5S		
引针尺寸	Pin dimensions [mm]	0.8*0.9		
PCB板孔径	PCB Hole Diameter [mm]	∅1.5		






Pitch:5.0mm

DB105R-5.0

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	20	-	10
接线范围 Wire Range	单芯线 Solid [AWG]	26~12		
	多芯线 Stranded [AWG]	26~12		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	250	400	630
额定电流	Rated Current [A]	24	24	24
额定冲击电压	Impulse withstand voltage [KV]	4	4	4
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	0.5~2.5		
	柔性导线 Flexible[mm²]	0.5~2.5		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	5.0/1~30		
剥线长度	Stripping Length [mm]	12~13		
螺丝/扭矩	Screw/Torque(Max)[N.m]	M2.5/0.4		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	250℃ /5S		
引针尺寸	Pin dimensions [mm]	0.8*0.8		
PCB板孔径	PCB Hole Diameter [mm]	∅1.4		






Pitch:5.0mm

DB105V-5.0

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	20	-	10
接线范围 Wire Range	单芯线 Solid [AWG]	26~12		
	多芯线 Stranded [AWG]	26~12		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	250	400	630
额定电流	Rated Current [A]	24	24	24
额定冲击电压	Impulse withstand voltage [KV]	4	4	4
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	0.5~2.5		
	柔性导线 Flexible[mm²]	0.5~2.5		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	5.0/1~30		
剥线长度	Stripping Length [mm]	12~13		
螺丝/扭矩	Screw/Torque(Max)[N.m]	M2.5/0.4		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	250℃ /5S		
引针尺寸	Pin dimensions [mm]	0.8*0.8		
PCB板孔径	PCB Hole Diameter [mm]	∅1.4		

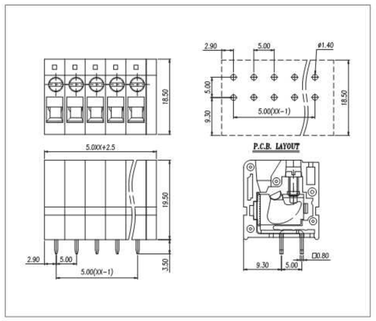




Pitch:5.0mm

DB105RA-5.0

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	20	-	10
接线范围 Wire Range	单芯线 Solid [AWG]	26~12		
	多芯线 Stranded [AWG]	26~12		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	250	400	630
额定电流	Rated Current [A]	24	24	24
额定冲击电压	Impulse withstand voltage [KV]	4	4	4
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	0.5~2.5		
	柔性导线 Flexible[mm²]	0.5~2.5		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	5.0/1~30		
剥线长度	Stripping Length [mm]	9		
螺丝/扭矩	Screw/Torque(Max)[N.m]	M2.5/0.4		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	250℃ /5S		
引针尺寸	Pin dimensions [mm]	0.8*0.8		
PCB板孔径	PCB Hole Diameter [mm]	∅1.4		

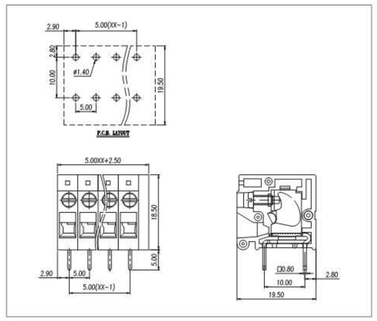




Pitch:5.0mm

DB105VA-5.0

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	20	-	10
接线范围 Wire Range	单芯线 Solid [AWG]	26~12		
	多芯线 Stranded [AWG]	26~12		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	250	400	630
额定电流	Rated Current [A]	24	24	24
额定冲击电压	Impulse withstand voltage [KV]	4	4	4
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	0.5~2.5		
	柔性导线 Flexible[mm²]	0.5~2.5		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	5.0/1~30		
剥线长度	Stripping Length [mm]	9		
螺丝/扭矩	Screw/Torque(Max)[N.m]	M2.5/0.4		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	250℃ /5S		
引针尺寸	Pin dimensions [mm]	0.8*0.8		
PCB板孔径	PCB Hole Diameter [mm]	∅1.4		

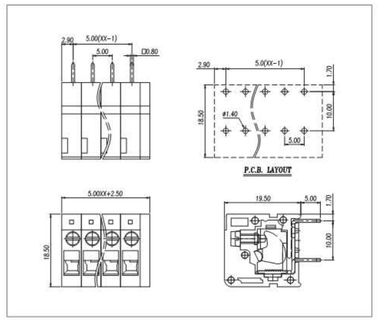




Pitch:7.5mm

DB105R–7.5

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	20	-	10
接线范围 Wire Range	单芯线 Solid [AWG]	26~12		
	多芯线 Stranded [AWG]	26~12		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	450	630	1000
额定电流	Rated Current [A]	24	24	24
额定冲击电压	Impulse withstand voltage [KV]	6	6	6
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	0.5~2.5		
	柔性导线 Flexible[mm²]	0.5~2.5		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	7.5/1~30		
剥线长度	Stripping Length [mm]	12~13		
螺丝/扭矩	Screw/Torque(Max)[N.m]	M2.5/0.4		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	250℃ /5S		
引针尺寸	Pin dimensions [mm]	0.8*0.8		
PCB板孔径	PCB Hole Diameter [mm]	∅1.4		






Pitch:7.5mm

DB105V–7.5

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	20	-	10
接线范围 Wire Range	单芯线 Solid [AWG]	26~12		
	多芯线 Stranded [AWG]	26~12		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	450	630	1000
额定电流	Rated Current [A]	24	24	24
额定冲击电压	Impulse withstand voltage [KV]	6	6	6
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	0.5~2.5		
	柔性导线 Flexible[mm²]	0.5~2.5		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	7.5/1~30		
剥线长度	Stripping Length [mm]	12~13		
螺丝/扭矩	Screw/Torque(Max)[N.m]	M2.5/0.4		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	250℃ /5S		
引针尺寸	Pin dimensions [mm]	0.8*0.8		
PCB板孔径	PCB Hole Diameter [mm]	∅1.4		

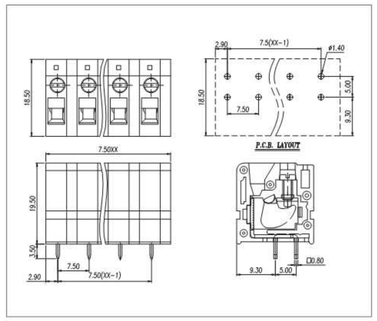




Pitch:7.5mm

DB105RA–7.5

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	20	-	10
接线范围 Wire Range	单芯线 Solid [AWG]	26~12		
	多芯线 Stranded [AWG]	26~12		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	450	630	1000
额定电流	Rated Current [A]	24	24	24
额定冲击电压	Impulse withstand voltage [KV]	6	6	6
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	0.5~2.5		
	柔性导线 Flexible[mm²]	0.5~2.5		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	7.5/1~30		
剥线长度	Stripping Length [mm]	9		
螺丝/扭矩	Screw/Torque(Max)[N.m]	M2.5/0.4		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	250℃ /5S		
引针尺寸	Pin dimensions [mm]	0.8*0.8		
PCB板孔径	PCB Hole Diameter [mm]	∅1.4		







Pitch:7.5mm

DB105VA–7.5

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	20	-	10
接线范围 Wire Range	单芯线 Solid [AWG]	26~12		
	多芯线 Stranded [AWG]	26~12		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	450	630	1000
额定电流	Rated Current [A]	24	24	24
额定冲击电压	Impulse withstand voltage [KV]	6	6	6
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	0.5~2.5		
	柔性导线 Flexible[mm²]	0.5~2.5		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	7.5/1~30		
剥线长度	Stripping Length [mm]	9		
螺丝/扭矩	Screw/Torque(Max)[N.m]	M2.5/0.4		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	250℃ /5S		
引针尺寸	Pin dimensions [mm]	0.8*0.8		
PCB板孔径	PCB Hole Diameter [mm]	∅1.4		




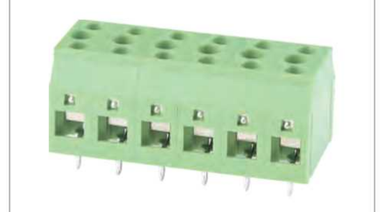

Pitch:7.5mm

DB106–7.5

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	30	-	10
接线范围 Wire Range	单芯线 Solid [AWG]	24~10		
	多芯线 Stranded [AWG]	24~10		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	320	320	630
额定电流	Rated Current [A]	32	32	32
额定冲击电压	Impulse withstand voltage [KV]	4	4	4
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	0.5~4.0		
	柔性导线 Flexible[mm²]	0.5~4.0		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	7.5/1~30		
剥线长度	Stripping Length [mm]	6~7		
螺丝/扭矩	Screw/Torque(Max)[N.m]	M3/0.5		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	250℃ /5S		
引针尺寸	Pin dimensions [mm]	0.8*0.9		
PCB板孔径	PCB Hole Diameter [mm]	∅1.4		






Pitch:15.0mm

DB137–15.0

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	600	600	600
额定电流	Rated Current [A]	115	115	5
接线范围 Wire Range	单芯线 Solid [AWG]	20~2		
	多芯线 Stranded [AWG]	20~2		
耐电压	Dielectric Voltage-Withstand	2.2KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	1000	1000	1000
额定电流	Rated Current [A]	125	125	125
额定冲击电压	Impulse withstand voltage [KV]	8	8	8
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	0.5~35		
	柔性导线 Flexible[mm²]	0.5~35		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	15.0/1~12		
剥线长度	Stripping Length [mm]	17~18		
螺丝/扭矩	Screw/Torque(Max)[N.m]	M5/2.0		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	250℃ /5S		
引针尺寸	Pin dimensions [mm]	1.2*1.2		
PCB板孔径	PCB Hole Diameter [mm]	∅2.0		

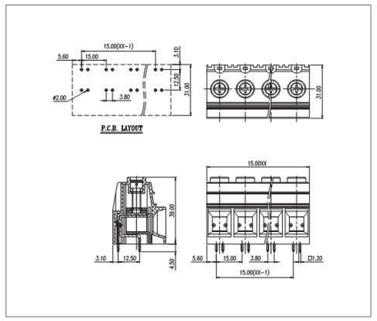


Terminal Block Professional Manufacturer



插拔式接线端子
PLUG-IN TERMINAL BLOCK

插拔式接线端子，可以连接截面为0.08mm²至16mm²的所有类型的导线，间距2.5mm至10.16mm可供选择，可根据需要选择进线方向，连接方向，插拔方向。产品设计符合IEC60998、IEC61984、UL1059、UL486E、CSA C22.2 No.158等国际标准。


Plug-in terminal blocks, provide the wire size from 0.08mm² to 16mm². Available with different pitches from 2.5mm to 10.16mm.Choosing insert direction, contact direction, Plug-in direction according to requests. The product is designed in accordance with IEC 60998, UL1059, CSA C22.2 NO.158 standards.



Pitch:2.5mm

DB2EKD-2.5

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	150	-	-
额定电流	Rated Current [A]	5	-	-
接线范围 Wire Range	单芯线 Solid [AWG]	26~20		
	多芯线 Stranded [AWG]	26~20		
耐电压	Withstand Voltage	1.3KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Surge voltage category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	100	160	320
额定电流	Rated Current [A]	5	5	5
额定冲击电压	Impulse withstand voltage [KV]	1.5	2.5	2.5
导线截面积 Wire Cross Section	硬质导线 Solid[mm²]	0.2~0.5		
	柔性导线 Flexible[mm²]	0.2~0.5		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Inflammability Class	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Conductor Plating	Ni plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	2.5/2~24		
剥线长度	Stripping Length [mm]	7~8		
螺丝/扭矩	Screw/Torque(Max)[N.m]	/		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	/		
引针尺寸	Pin dimensions [mm]	/		
PCB板孔径	PCB Hole Diameter [mm]	/		

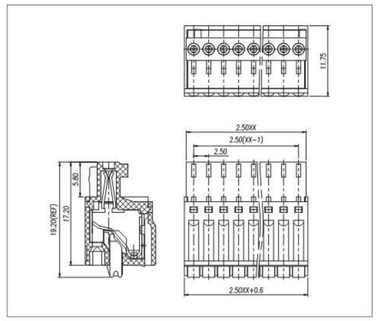




Pitch:2.5/2.54mm

DB2EVC-2.5/2.54


UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	150	-	-
额定电流	Rated Current [A]	5	-	-
接线范围 Wire Range	单芯线 Solid [AWG]	/		
	多芯线 Stranded [AWG]	/		
耐电压	Dielectric Voltage-Withstand	1.3KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	80	160	320
额定电流	Rated Current [A]	5	5	5
额定冲击电压	Impulse withstand voltage [KV]	1.5	2.5	2.5
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	/		
	柔性导线 Flexible[mm²]	/		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	2.5,2.54/2~24		
剥线长度	Stripping Length [mm]	/		
螺丝/扭矩	Screw/Torque(Max)[N.m]	/		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	250℃ /5S		
引针尺寸	Pin dimensions [mm]	0.8*0.8		
PCB板孔径	PCB Hole Diameter [mm]	∅1.4		

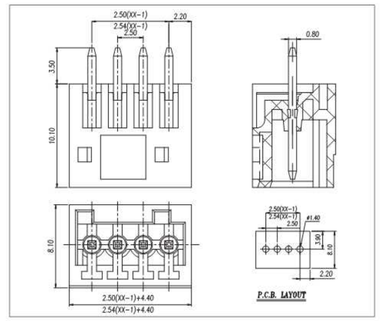

Pitch:2.5/2.54mm

DB2EKD-2.5/2.54

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	150	-	-
额定电流	Rated Current [A]	5	-	-
接线范围 Wire Range	单芯线 Solid [AWG]	/		
	多芯线 Stranded [AWG]	/		
耐电压	Dielectric Voltage-Withstand	1.3KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	80	160	320
额定电流	Rated Current [A]	5	5	5
额定冲击电压	Impulse withstand voltage [KV]	1.5	2.5	2.5
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	/		
	柔性导线 Flexible[mm²]	/		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	2.5,2.54/2~24		
剥线长度	Stripping Length [mm]	/		
螺丝/扭矩	Screw/Torque(Max)[N.m]	/		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	250℃ /5S		
引针尺寸	Pin dimensions [mm]	0.8*0.8		
PCB板孔径	PCB Hole Diameter [mm]	∅1.4		

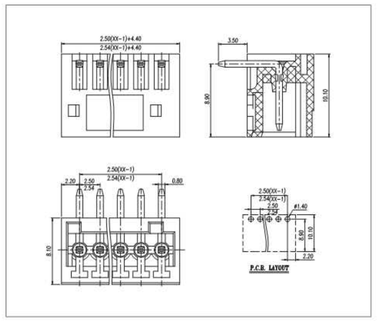




Pitch:2.5mm

DB2EVH-2.5

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	150	-	-
额定电流	Rated Current [A]	5	-	-
接线范围 Wire Range	单芯线 Solid [AWG]	/		
	多芯线 Stranded [AWG]	/		
耐电压	Dielectric Voltage-Withstand	1.3KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	80	160	320
额定电流	Rated Current [A]	5	5	5
额定冲击电压	Impulse withstand voltage [KV]	1.5	2.5	2.5
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	/		
	柔性导线 Flexible[mm²]	/		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	2.5/2*2~2*24		
剥线长度	Stripping Length [mm]	/		
螺丝/扭矩	Screw/Torque(Max)[N.m]	/		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	250℃ /5S		
引针尺寸	Pin dimensions [mm]	0.8*0.8		
PCB板孔径	PCB Hole Diameter [mm]	∅1.4		







Pitch:2.5mm

DB2ERH-2.5

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	150	-	-
额定电流	Rated Current [A]	5	-	-
接线范围 Wire Range	单芯线 Solid [AWG]	/		
	多芯线 Stranded [AWG]	/		
耐电压	Dielectric Voltage-Withstand	1.3KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	80	160	320
额定电流	Rated Current [A]	5	5	5
额定冲击电压	Impulse withstand voltage [KV]	1.5	2.5	2.5
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	/		
	柔性导线 Flexible[mm²]	/		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	2.5/2*2~2*24		
剥线长度	Stripping Length [mm]	/		
螺丝/扭矩	Screw/Torque(Max)[N.m]	/		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	250℃ /5S		
引针尺寸	Pin dimensions [mm]	0.8*0.8		
PCB板孔径	PCB Hole Diameter [mm]	∅1.4		







Pitch:3.5/3.81mm

DB2EKN-3.5/3.81

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	8	-	8
接线范围 Wire Range	单芯线 Solid [AWG]	24~16		
	多芯线 Stranded [AWG]	24~16		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	160	160	320
额定电流	Rated Current [A]	8	8	8
额定冲击电压	Impulse withstand voltage [KV]	2.5	2.5	2.5
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	0.2~1.5		
	柔性导线 Flexible[mm²]	0.2~1.5		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	3.5,3.81/2~24		
剥线长度	Stripping Length [mm]	9~10		
螺丝/扭矩	Screw/Torque(Max)[N.m]	/		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	/		
引针尺寸	Pin dimensions [mm]	/		
PCB板孔径	PCB Hole Diameter [mm]	/		




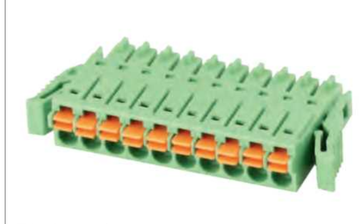


Pitch:3.5/3.81mm

DB2EKNG-3.5/3.81

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	8	-	8
接线范围 Wire Range	单芯线 Solid [AWG]	24~16		
	多芯线 Stranded [AWG]	24~16		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	160	160	320
额定电流	Rated Current [A]	8	8	8
额定冲击电压	Impulse withstand voltage [KV]	2.5	2.5	2.5
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	0.2~1.5		
	柔性导线 Flexible[mm²]	0.2~1.5		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	3.5,3.81/2~24		
剥线长度	Stripping Length [mm]	9~10		
螺丝/扭矩	Screw/Torque(Max)[N.m]	/		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	/		
引针尺寸	Pin dimensions [mm]	/		
PCB板孔径	PCB Hole Diameter [mm]	/		




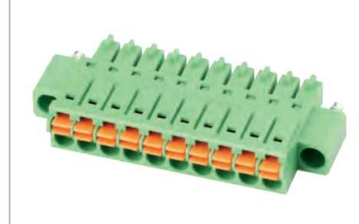


Pitch:3.5/3.81mm

DB2EKNM-3.5/3.81

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	8	-	8
接线范围 Wire Range	单芯线 Solid [AWG]	24~16		
	多芯线 Stranded [AWG]	24~16		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	160	160	320
额定电流	Rated Current [A]	8	8	8
额定冲击电压	Impulse withstand voltage [KV]	2.5	2.5	2.5
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	0.2~1.5		
	柔性导线 Flexible[mm²]	0.2~1.5		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	3.5,3.81/2~24		
剥线长度	Stripping Length [mm]	9-10		
螺丝/扭矩	Screw/Torque(Max)[N.m]	/		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	/		
引针尺寸	Pin dimensions [mm]	/		
PCB板孔径	PCB Hole Diameter [mm]	/		




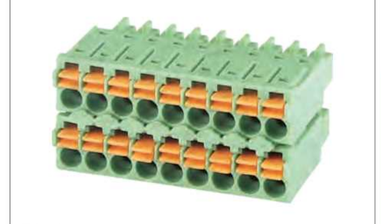


Pitch:3.5mm

DB2EKN-3.5

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	8	-	8
接线范围 Wire Range	单芯线 Solid [AWG]	24~16		
	多芯线 Stranded [AWG]	24~16		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	160	160	320
额定电流	Rated Current [A]	8	8	8
额定冲击电压	Impulse withstand voltage [KV]	2.5	2.5	2.5
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	0.2~1.5		
	柔性导线 Flexible[mm²]	0.2~1.5		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	3.5/2*2~2*24		
剥线长度	Stripping Length [mm]	9~10		
螺丝/扭矩	Screw/Torque(Max)[N.m]	/		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	/		
引针尺寸	Pin dimensions [mm]	/		
PCB板孔径	PCB Hole Diameter [mm]	/		







Pitch:3.5mm

DB2EKNMB-3.5

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	8	-	8
接线范围 Wire Range	单芯线 Solid [AWG]	24~16		
	多芯线 Stranded [AWG]	24~16		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	160	160	320
额定电流	Rated Current [A]	8	8	8
额定冲击电压	Impulse withstand voltage [KV]	2.5	2.5	2.5
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	0.2~1.5		
	柔性导线 Flexible[mm²]	0.2~1.5		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	3.5/2*2~2*24		
剥线长度	Stripping Length [mm]	9~10		
螺丝/扭矩	Screw/Torque(Max)[N.m]	/		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	/		
引针尺寸	Pin dimensions [mm]	/		
PCB板孔径	PCB Hole Diameter [mm]	/		

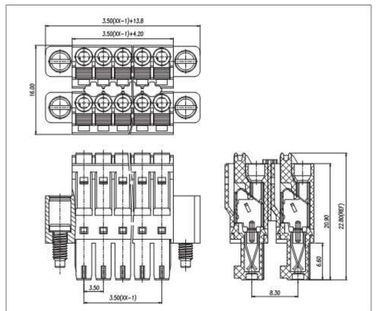





Pitch:3.5mm

DB2EKNGB-3.5

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	8	-	8
接线范围 Wire Range	单芯线 Solid [AWG]	24~16		
	多芯线 Stranded [AWG]	24~16		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	160	160	320
额定电流	Rated Current [A]	8	8	8
额定冲击电压	Impulse withstand voltage [KV]	2.5	2.5	2.5
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	0.2~1.5		
	柔性导线 Flexible[mm²]	0.2~1.5		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	3.5/2*2~2*24		
剥线长度	Stripping Length [mm]	9~10		
螺丝/扭矩	Screw/Torque(Max)[N.m]	/		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	/		
引针尺寸	Pin dimensions [mm]	/		
PCB板孔径	PCB Hole Diameter [mm]	/		







Pitch:3.5mm

DB2EKNH-3.5

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	8	-	8
接线范围 Wire Range	单芯线 Solid [AWG]	24~16		
	多芯线 Stranded [AWG]	24~16		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	160	160	320
额定电流	Rated Current [A]	8	8	8
额定冲击电压	Impulse withstand voltage [KV]	2.5	2.5	2.5
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	0.2~1.5		
	柔性导线 Flexible[mm²]	0.2~1.5		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	3.5/2*2~2*24		
剥线长度	Stripping Length [mm]	9~10		
螺丝/扭矩	Screw/Torque(Max)[N.m]	/		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	/		
引针尺寸	Pin dimensions [mm]	/		
PCB板孔径	PCB Hole Diameter [mm]	/		







Pitch:3.5mm

DB2EKNHM-3.5

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	8	-	8
接线范围 Wire Range	单芯线 Solid [AWG]	24~16		
	多芯线 Stranded [AWG]	24~16		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	160	160	320
额定电流	Rated Current [A]	8	8	8
额定冲击电压	Impulse withstand voltage [KV]	2.5	2.5	2.5
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	0.2~1.5		
	柔性导线 Flexible[mm²]	0.2~1.5		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	3.5/2*2~2*24		
剥线长度	Stripping Length [mm]	9-10		
螺丝/扭矩	Screw/Torque(Max)[N.m]	/		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	/		
引针尺寸	Pin dimensions [mm]	/		
PCB板孔径	PCB Hole Diameter [mm]	/		






Pitch:3.5mm

DB2EKNHG-3.5

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	8	-	8
接线范围 Wire Range	单芯线 Solid [AWG]	24~16		
	多芯线 Stranded [AWG]	24~16		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	160	160	320
额定电流	Rated Current [A]	8	8	8
额定冲击电压	Impulse withstand voltage [KV]	2.5	2.5	2.5
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	0.2~1.5		
	柔性导线 Flexible[mm²]	0.2~1.5		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	3.5/2*2~2*24		
剥线长度	Stripping Length [mm]	9-10		
螺丝/扭矩	Screw/Torque(Max)[N.m]	/		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	/		
引针尺寸	Pin dimensions [mm]	/		
PCB板孔径	PCB Hole Diameter [mm]	/		

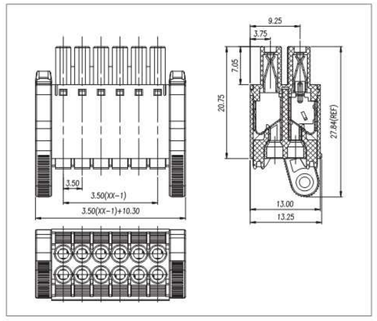





Pitch:3.5mm

DB2EKSH-3.5

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	150	-	-
额定电流	Rated Current [A]	7	-	-
接线范围 Wire Range	单芯线 Solid [AWG]	28~18		
	多芯线 Stranded [AWG]	28~18		
耐电压	Dielectric Voltage-Withstand	1.3KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	160	160	320
额定电流	Rated Current [A]	10	10	10
额定冲击电压	Impulse withstand voltage [KV]	2.5	2.5	2.5
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	0.2~1.0		
	柔性导线 Flexible[mm²]	0.2~1.0		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	3.5/2*2~2*24		
剥线长度	Stripping Length [mm]	7~8		
螺丝/扭矩	Screw/Torque(Max)[N.m]	/		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	/		
引针尺寸	Pin dimensions [mm]	/		
PCB板孔径	PCB Hole Diameter [mm]	/		

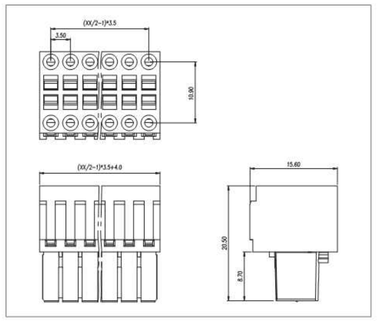



Pitch:3.5mm

DB2EKSHM−3.5

UL/CUL 技术参数
UL/CUL Technical Data

等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	150	-	-
额定电流	Rated Current [A]	7	-	-
接线范围 Wire Range	单芯线 Solid [AWG]	28~18		
	多芯线 Stranded [AWG]	28~18		
耐电压	Dielectric Voltage-Withstand	1.3KV		

IEC 技术参数
IEC Technical Data


过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	160	160	320
额定电流	Rated Current [A]	10	10	10
额定冲击电压	Impulse withstand voltage [KV]	2.5	2.5	2.5
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	0.2~1.0		
	柔性导线 Flexible[mm²]	0.2~1.0		

材料 Material

绝缘材料	Insulation Material	PA66
阻燃等级	Flame retardant rating	UL94V-0
导体材料	Conductor Material	Copper alloy
导体表面镀层	Plating of conductor surface	Sn plated

一般参数 Other Data

间距/极数	Pitch/Poles [mm]/[P]	3.5/2*2~2*24
剥线长度	Stripping Length [mm]	7~8
螺丝/扭矩	Screw/Torque(Max)[N.m]	/
工作温度	Operating temperature[℃]	-40~+105
焊锡温度	Soldering temperature	/
引针尺寸	Pin dimensions [mm]	/
PCB板孔径	PCB Hole Diameter [mm]	/

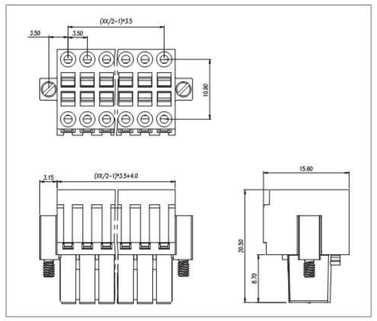



Pitch:3.5mm

DB2EKSHG−3.5

UL/CUL 技术参数
UL/CUL Technical Data

等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	150	-	-
额定电流	Rated Current [A]	7	-	-
接线范围 Wire Range	单芯线 Solid [AWG]	28~18		
	多芯线 Stranded [AWG]	28~18		
耐电压	Dielectric Voltage-Withstand	1.3KV		

IEC 技术参数
IEC Technical Data


过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	160	160	320
额定电流	Rated Current [A]	10	10	10
额定冲击电压	Impulse withstand voltage [KV]	2.5	2.5	2.5
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	0.2~1.0		
	柔性导线 Flexible[mm²]	0.2~1.0		

材料 Material

绝缘材料	Insulation Material	PA66
阻燃等级	Flame retardant rating	UL94V-0
导体材料	Conductor Material	Copper alloy
导体表面镀层	Plating of conductor surface	Sn plated

一般参数 Other Data

间距/极数	Pitch/Poles [mm]/[P]	3.5/2*2~2*24
剥线长度	Stripping Length [mm]	7~8
螺丝/扭矩	Screw/Torque(Max)[N.m]	/
工作温度	Operating temperature[℃]	-40~+105
焊锡温度	Soldering temperature	/
引针尺寸	Pin dimensions [mm]	/
PCB板孔径	PCB Hole Diameter [mm]	/

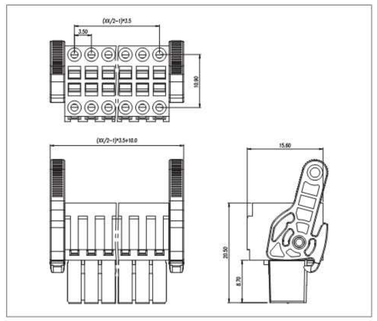



Pitch:3.5/3.81mm

DB1EVC−3.5/3.81

UL/CUL 技术参数
UL/CUL Technical Data

等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	8	-	8
接线范围 Wire Range	单芯线 Solid [AWG]	/		
	多芯线 Stranded [AWG]	/		
耐电压	Dielectric Voltage-Withstand	1.6KV		

IEC 技术参数
IEC Technical Data


过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	160	160	250
额定电流	Rated Current [A]	8	8	8
额定冲击电压	Impulse withstand voltage [KV]	2.5	2.5	2.5
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	/		
	柔性导线 Flexible[mm²]	/		

材料 Material

绝缘材料	Insulation Material	LCP
阻燃等级	Flame retardant rating	UL94V-0
导体材料	Conductor Material	Copper alloy
导体表面镀层	Plating of conductor surface	Sn plated

一般参数 Other Data

间距/极数	Pitch/Poles [mm]/[P]	3.5,3.81/2~24
剥线长度	Stripping Length [mm]	/
螺丝/扭矩	Screw/Torque(Max)[N.m]	/
工作温度	Operating temperature[℃]	-40~+130
焊锡温度	Soldering temperature	285℃ /10S
引针尺寸	Pin dimensions [mm]	0.8*0.8
PCB板孔径	PCB Hole Diameter [mm]	∅1.4

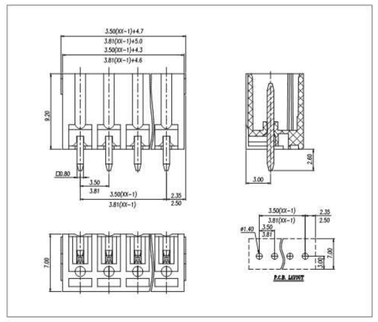



Pitch:3.5/3.81mm

DB1ERC−3.5/3.81

UL/CUL 技术参数
UL/CUL Technical Data

等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	8	-	8
接线范围 Wire Range	单芯线 Solid [AWG]	/		
	多芯线 Stranded [AWG]	/		
耐电压	Dielectric Voltage-Withstand	1.6KV		

IEC 技术参数
IEC Technical Data


过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	160	160	250
额定电流	Rated Current [A]	8	8	8
额定冲击电压	Impulse withstand voltage [KV]	2.5	2.5	2.5
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	/		
	柔性导线 Flexible[mm²]	/		

材料 Material

绝缘材料	Insulation Material	LCP
阻燃等级	Flame retardant rating	UL94V-0
导体材料	Conductor Material	Copper alloy
导体表面镀层	Plating of conductor surface	Sn plated

一般参数 Other Data

间距/极数	Pitch/Poles [mm]/[P]	3.5,3.81/2~24
剥线长度	Stripping Length [mm]	/
螺丝/扭矩	Screw/Torque(Max)[N.m]	/
工作温度	Operating temperature[℃]	-40~+130
焊锡温度	Soldering temperature	285℃ /10S
引针尺寸	Pin dimensions [mm]	0.8*0.8
PCB板孔径	PCB Hole Diameter [mm]	∅1.4

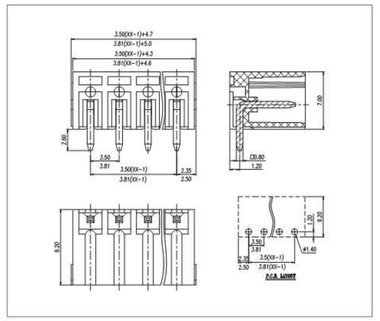



Pitch:3.5/3.81mm

DB1EVM−3.5/3.81

UL/CUL 技术参数
UL/CUL Technical Data

等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	8	-	8
接线范围 Wire Range	单芯线 Solid [AWG]	/		
	多芯线 Stranded [AWG]	/		
耐电压	Dielectric Voltage-Withstand	1.6KV		

IEC 技术参数
IEC Technical Data


过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	160	160	250
额定电流	Rated Current [A]	8	8	8
额定冲击电压	Impulse withstand voltage [KV]	2.5	2.5	2.5
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	/		
	柔性导线 Flexible[mm²]	/		


材料 Material

绝缘材料	Insulation Material	LCP
阻燃等级	Flame retardant rating	UL94V-0
导体材料	Conductor Material	Copper alloy
导体表面镀层	Plating of conductor surface	Sn plated

一般参数 Other Data

间距/极数	Pitch/Poles [mm]/[P]	3.5,3.81/2~24
剥线长度	Stripping Length [mm]	/
螺丝/扭矩	Screw/Torque(Max)[N.m]	/
工作温度	Operating temperature[℃]	-40~+130
焊锡温度	Soldering temperature	285℃ /10S
引针尺寸	Pin dimensions [mm]	0.8*0.8
PCB板孔径	PCB Hole Diameter [mm]	∅1.4

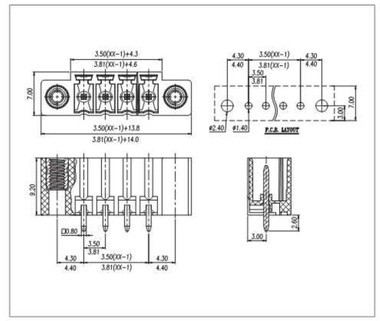

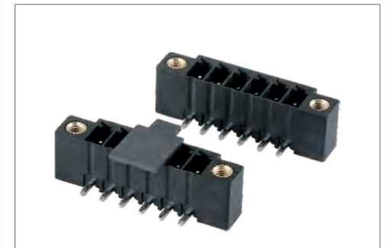

Pitch:3.5/3.81mm

DB1ERM−3.5/3.81

UL/CUL 技术参数
UL/CUL Technical Data

等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	8	-	8
接线范围 Wire Range	单芯线 Solid [AWG]	/		
	多芯线 Stranded [AWG]	/		
耐电压	Dielectric Voltage-Withstand	1.6KV		

IEC 技术参数
IEC Technical Data


过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	160	160	250
额定电流	Rated Current [A]	8	8	8
额定冲击电压	Impulse withstand voltage [KV]	2.5	2.5	2.5
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	/		
	柔性导线 Flexible[mm²]	/		

材料 Material

绝缘材料	Insulation Material	LCP
阻燃等级	Flame retardant rating	UL94V-0
导体材料	Conductor Material	Copper alloy
导体表面镀层	Plating of conductor surface	Sn plated

一般参数 Other Data

间距/极数	Pitch/Poles [mm]/[P]	3.5,3.81/2~24
剥线长度	Stripping Length [mm]	/
螺丝/扭矩	Screw/Torque(Max)[N.m]	/
工作温度	Operating temperature[℃]	-40~+130
焊锡温度	Soldering temperature	285℃ /10S
引针尺寸	Pin dimensions [mm]	0.8*0.8
PCB板孔径	PCB Hole Diameter [mm]	∅1.4

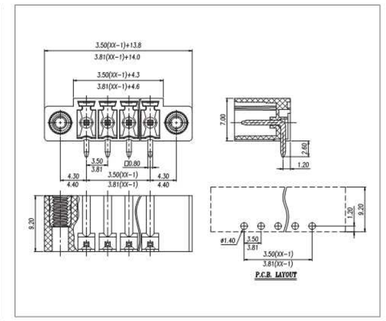




Pitch:3.5/3.81mm

DB1EVHB-3.5/3.81

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	-
额定电流	Rated Current [A]	8	-	-
接线范围 Wire Range	单芯线 Solid [AWG]	/		
	多芯线 Stranded [AWG]	/		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	160	160	250
额定电流	Rated Current [A]	8	8	8
额定冲击电压	Impulse withstand voltage [KV]	2.5	2.5	2.5
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	/		
	柔性导线 Flexible[mm²]	/		
材料 Material				
绝缘材料	Insulation Material	LCP		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	3.5,3.81/ 2*2~2*24		
剥线长度	Stripping Length [mm]	/		
螺丝/扭矩	Screw/Torque(Max)[N.m]	/		
工作温度	Operating temperature[℃]	-40~+130		
焊锡温度	Soldering temperature	285℃ /10S		
引针尺寸	Pin dimensions [mm]	0.8*0.8		
PCB板孔径	PCB Hole Diameter [mm]	∅1.4		






Pitch:3.5/3.81mm

DB1ERHB-3.5/3.81

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	-
额定电流	Rated Current [A]	8	-	-
接线范围 Wire Range	单芯线 Solid [AWG]	/		
	多芯线 Stranded [AWG]	/		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	160	160	250
额定电流	Rated Current [A]	8	8	8
额定冲击电压	Impulse withstand voltage [KV]	2.5	2.5	2.5
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	/		
	柔性导线 Flexible[mm²]	/		
材料 Material				
绝缘材料	Insulation Material	LCP		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	3.5,3.81/ 2*2~2*24		
剥线长度	Stripping Length [mm]	/		
螺丝/扭矩	Screw/Torque(Max)[N.m]	/		
工作温度	Operating temperature[℃]	-40~+130		
焊锡温度	Soldering temperature	285℃ /10S		
引针尺寸	Pin dimensions [mm]	0.8*0.8		
PCB板孔径	PCB Hole Diameter [mm]	∅1.4		






Pitch:3.5/3.81mm

DB1EVHBM-3.5/3.81

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	-
额定电流	Rated Current [A]	8	-	-
接线范围 Wire Range	单芯线 Solid [AWG]	/		
	多芯线 Stranded [AWG]	/		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	160	160	250
额定电流	Rated Current [A]	8	8	8
额定冲击电压	Impulse withstand voltage [KV]	2.5	2.5	2.5
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	/		
	柔性导线 Flexible[mm²]	/		
材料 Material				
绝缘材料	Insulation Material	LCP		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	3.5,3.81/ 2*2~2*24		
剥线长度	Stripping Length [mm]	/		
螺丝/扭矩	Screw/Torque(Max)[N.m]	/		
工作温度	Operating temperature[℃]	-40~+130		
焊锡温度	Soldering temperature	285℃ /10S		
引针尺寸	Pin dimensions [mm]	0.8*0.8		
PCB板孔径	PCB Hole Diameter [mm]	∅1.4		






Pitch:3.5/3.81mm

DB1ERHBM-3.5/3.81

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	-
额定电流	Rated Current [A]	8	-	-
接线范围 Wire Range	单芯线 Solid [AWG]	/		
	多芯线 Stranded [AWG]	/		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	160	160	250
额定电流	Rated Current [A]	8	8	8
额定冲击电压	Impulse withstand voltage [KV]	2.5	2.5	2.5
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	/		
	柔性导线 Flexible[mm²]	/		
材料 Material				
绝缘材料	Insulation Material	LCP		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	3.5,3.81/ 2*2~2*24		
剥线长度	Stripping Length [mm]	/		
螺丝/扭矩	Screw/Torque(Max)[N.m]	/		
工作温度	Operating temperature[℃]	-40~+130		
焊锡温度	Soldering temperature	285℃ /10S		
引针尺寸	Pin dimensions [mm]	0.8*0.8		
PCB板孔径	PCB Hole Diameter [mm]	∅1.4		






Pitch:3.5/3.81mm

DB1EVHBN-3.5/3.81

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	-
额定电流	Rated Current [A]	8	-	-
接线范围 Wire Range	单芯线 Solid [AWG]	/		
	多芯线 Stranded [AWG]	/		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	160	160	250
额定电流	Rated Current [A]	8	8	8
额定冲击电压	Impulse withstand voltage [KV]	2.5	2.5	2.5
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	/		
	柔性导线 Flexible[mm²]	/		
材料 Material				
绝缘材料	Insulation Material	LCP		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	3.5,3.81/ 2*2~2*24		
剥线长度	Stripping Length [mm]	/		
螺丝/扭矩	Screw/Torque(Max)[N.m]	/		
工作温度	Operating temperature[℃]	-40~+130		
焊锡温度	Soldering temperature	285℃ /10S		
引针尺寸	Pin dimensions [mm]	0.8*0.8		
PCB板孔径	PCB Hole Diameter [mm]	∅1.4		







Pitch:3.5/3.81mm

DB1ERHBN-3.5/3.81

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	-
额定电流	Rated Current [A]	8	-	-
接线范围 Wire Range	单芯线 Solid [AWG]	/		
	多芯线 Stranded [AWG]	/		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	160	160	250
额定电流	Rated Current [A]	8	8	8
额定冲击电压	Impulse withstand voltage [KV]	2.5	2.5	2.5
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	/		
	柔性导线 Flexible[mm²]	/		
材料 Material				
绝缘材料	Insulation Material	LCP		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	3.5,3.81/ 2*2~2*24		
剥线长度	Stripping Length [mm]	/		
螺丝/扭矩	Screw/Torque(Max)[N.m]	/		
工作温度	Operating temperature[℃]	-40~+130		
焊锡温度	Soldering temperature	285℃ /10S		
引针尺寸	Pin dimensions [mm]	0.8*0.8		
PCB板孔径	PCB Hole Diameter [mm]	∅1.4		

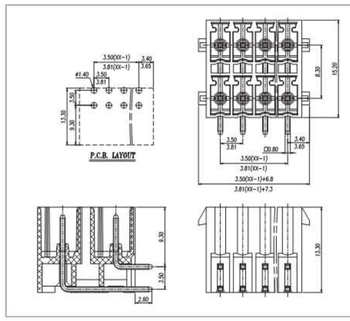




Pitch:3.5 mm

DB1EVHC-3.5

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	8	-	8
接线范围 Wire Range	单芯线 Solid [AWG]	/		
	多芯线 Stranded [AWG]	/		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	160	160	250
额定电流	Rated Current [A]	8	8	8
额定冲击电压	Impulse withstand voltage [KV]	2.5	2.5	2.5
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	/		
	柔性导线 Flexible[mm²]	/		
材料 Material				
绝缘材料	Insulation Material	LCP		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	3.5/2*2~2*24		
剥线长度	Stripping Length [mm]	/		
螺丝/扭矩	Screw/Torque(Max)[N.m]	/		
工作温度	Operating temperature[℃]	-40~+130		
焊锡温度	Soldering temperature	285℃ /10S		
引针尺寸	Pin dimensions [mm]	0.8*0.8		
PCB板孔径	PCB Hole Diameter [mm]	∅1.4		






Pitch:3.5 mm

DB1EVHCM-3.5

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	8	-	8
接线范围 Wire Range	单芯线 Solid [AWG]	/		
	多芯线 Stranded [AWG]	/		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	160	160	250
额定电流	Rated Current [A]	8	8	8
额定冲击电压	Impulse withstand voltage [KV]	2.5	2.5	2.5
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	/		
	柔性导线 Flexible[mm²]	/		
材料 Material				
绝缘材料	Insulation Material	LCP		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	3.5/2*2~2*24		
剥线长度	Stripping Length [mm]	/		
螺丝/扭矩	Screw/Torque(Max)[N.m]	/		
工作温度	Operating temperature[℃]	-40~+130		
焊锡温度	Soldering temperature	285℃ /10S		
引针尺寸	Pin dimensions [mm]	0.8*0.8		
PCB板孔径	PCB Hole Diameter [mm]	∅1.4		






Pitch:3.5 mm

DB1ERHC-3.5

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	150	-	150
额定电流	Rated Current [A]	8	-	8
接线范围 Wire Range	单芯线 Solid [AWG]	/		
	多芯线 Stranded [AWG]	/		
耐电压	Dielectric Voltage-Withstand	1.3KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	160	160	250
额定电流	Rated Current [A]	8	8	8
额定冲击电压	Impulse withstand voltage [KV]	2.5	2.5	2.5
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	/		
	柔性导线 Flexible[mm²]	/		
材料 Material				
绝缘材料	Insulation Material	LCP		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	3.5/2*2~2*24		
剥线长度	Stripping Length [mm]	/		
螺丝/扭矩	Screw/Torque(Max)[N.m]	/		
工作温度	Operating temperature[℃]	-40~+130		
焊锡温度	Soldering temperature	285℃ /10S		
引针尺寸	Pin dimensions [mm]	0.8*0.8		
PCB板孔径	PCB Hole Diameter [mm]	∅1.4		

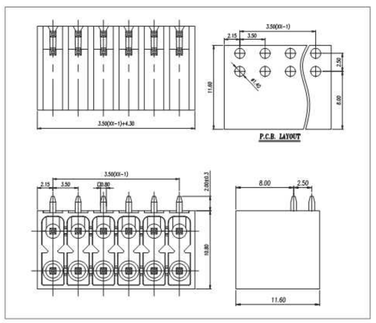





Pitch:3.5 mm

DB1ERHCM-3.5

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	150	-	150
额定电流	Rated Current [A]	8	-	8
接线范围 Wire Range	单芯线 Solid [AWG]	/		
	多芯线 Stranded [AWG]	/		
耐电压	Dielectric Voltage-Withstand	1.3KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	160	160	250
额定电流	Rated Current [A]	8	8	8
额定冲击电压	Impulse withstand voltage [KV]	2.5	2.5	2.5
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	/		
	柔性导线 Flexible[mm²]	/		
材料 Material				
绝缘材料	Insulation Material	LCP		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	3.5/2*2~2*24		
剥线长度	Stripping Length [mm]	/		
螺丝/扭矩	Screw/Torque(Max)[N.m]	/		
工作温度	Operating temperature[℃]	-40~+130		
焊锡温度	Soldering temperature	285℃ /10S		
引针尺寸	Pin dimensions [mm]	0.8*0.8		
PCB板孔径	PCB Hole Diameter [mm]	∅1.4		

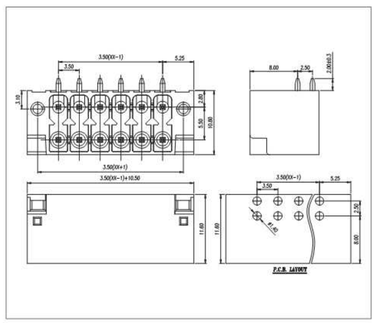




Pitch:3.5 mm

DB1EVHS-3.5

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	150	-	-
额定电流	Rated Current [A]	7	-	-
接线范围 Wire Range	单芯线 Solid [AWG]	/		
	多芯线 Stranded [AWG]	/		
耐电压	Dielectric Voltage-Withstand	1.3KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	160	160	250
额定电流	Rated Current [A]	10	10	10
额定冲击电压	Impulse withstand voltage [KV]	2.5	2.5	2.5
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	/		
	柔性导线 Flexible[mm²]	/		
材料 Material				
绝缘材料	Insulation Material	PBT		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	3.5/2*2~2*24		
剥线长度	Stripping Length [mm]	/		
螺丝/扭矩	Screw/Torque(Max)[N.m]	/		
工作温度	Operating temperature[℃]	-30~+120		
焊锡温度	Soldering temperature	250℃/5S		
引针尺寸	Pin dimensions [mm]	0.8*0.8		
PCB板孔径	PCB Hole Diameter [mm]	∅1.4		

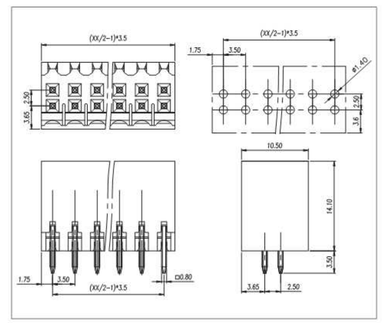





Pitch:3.5 mm

DB1EVHSC-3.5

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	150	-	-
额定电流	Rated Current [A]	7	-	-
接线范围 Wire Range	单芯线 Solid [AWG]	/		
	多芯线 Stranded [AWG]	/		
耐电压	Dielectric Voltage-Withstand	1.3KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	160	160	250
额定电流	Rated Current [A]	10	10	10
额定冲击电压	Impulse withstand voltage [KV]	2.5	2.5	2.5
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	/		
	柔性导线 Flexible[mm²]	/		
材料 Material				
绝缘材料	Insulation Material	PBT		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	3.5/2*2~2*24		
剥线长度	Stripping Length [mm]	/		
螺丝/扭矩	Screw/Torque(Max)[N.m]	/		
工作温度	Operating temperature[℃]	-30~+120		
焊锡温度	Soldering temperature	250℃/5S		
引针尺寸	Pin dimensions [mm]	0.8*0.8		
PCB板孔径	PCB Hole Diameter [mm]	∅1.4		

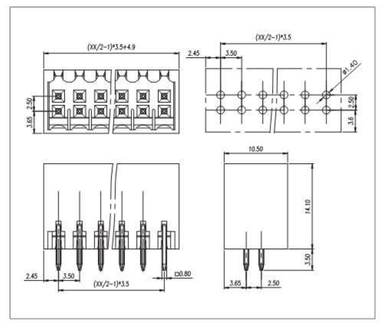



Pitch:3.5 mm

DB1EVHSM-3.5

UL/CUL 技术参数
UL/CUL Technical Data

等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	150	-	-
额定电流	Rated Current [A]	7	-	-
接线范围 Wire Range	单芯线 Solid [AWG]	/		
	多芯线 Stranded [AWG]	/		
耐电压	Dielectric Voltage-Withstand	1.3KV		

IEC 技术参数
IEC Technical Data


过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	160	160	250
额定电流	Rated Current [A]	10	10	10
额定冲击电压	Impulse withstand voltage [KV]	2.5	2.5	2.5
导线截面积 Conductor cross section	硬质导线 Solid [mm²]	/		
	柔性导线 Flexible [mm²]	/		


材料 Material

绝缘材料	Insulation Material	PBT
阻燃等级	Flame retardant rating	UL94V-0
导体材料	Conductor Material	Copper alloy
导体表面镀层	Plating of conductor surface	Sn plated

一般参数 Other Data

间距/极数	Pitch/Poles [mm]/[P]	3.5/2*2~2*24
剥线长度	Stripping Length [mm]	/
螺丝/扭矩	Screw/Torque(Max) [N.m]	/
工作温度	Operating temperature [℃]	-30~+120
焊锡温度	Soldering temperature	250℃/5S
引针尺寸	Pin dimensions [mm]	0.8*0.8
PCB板孔径	PCB Hole Diameter [mm]	∅1.4

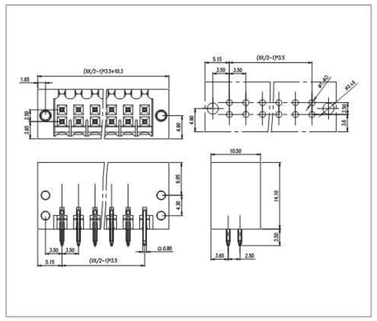



Pitch:3.5 mm

DB1ERHS-3.5

UL/CUL 技术参数
UL/CUL Technical Data

等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	150	-	-
额定电流	Rated Current [A]	7	-	-
接线范围 Wire Range	单芯线 Solid [AWG]	/		
	多芯线 Stranded [AWG]	/		
耐电压	Dielectric Voltage-Withstand	1.3KV		

IEC 技术参数
IEC Technical Data


过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	160	160	250
额定电流	Rated Current [A]	10	10	10
额定冲击电压	Impulse withstand voltage [KV]	2.5	2.5	2.5
导线截面积 Conductor cross section	硬质导线 Solid [mm²]	/		
	柔性导线 Flexible [mm²]	/		


材料 Material

绝缘材料	Insulation Material	PBT
阻燃等级	Flame retardant rating	UL94V-0
导体材料	Conductor Material	Copper alloy
导体表面镀层	Plating of conductor surface	Sn plated

一般参数 Other Data

间距/极数	Pitch/Poles [mm]/[P]	3.5/2*2~2*24
剥线长度	Stripping Length [mm]	/
螺丝/扭矩	Screw/Torque(Max) [N.m]	/
工作温度	Operating temperature [℃]	-30~+120
焊锡温度	Soldering temperature	250℃/5S
引针尺寸	Pin dimensions [mm]	0.8*0.8
PCB板孔径	PCB Hole Diameter [mm]	∅1.4

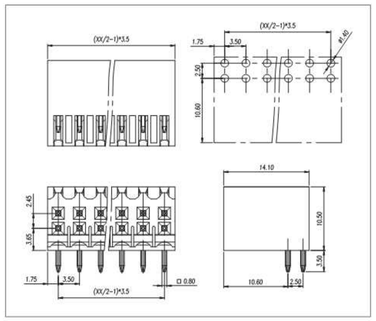



Pitch:3.5 mm

DB1ERHSC-3.5

UL/CUL 技术参数
UL/CUL Technical Data

等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	150	-	-
额定电流	Rated Current [A]	7	-	-
接线范围 Wire Range	单芯线 Solid [AWG]	/		
	多芯线 Stranded [AWG]	/		
耐电压	Dielectric Voltage-Withstand	1.3KV		

IEC 技术参数
IEC Technical Data


过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	160	160	250
额定电流	Rated Current [A]	10	10	10
额定冲击电压	Impulse withstand voltage [KV]	2.5	2.5	2.5
导线截面积 Conductor cross section	硬质导线 Solid [mm²]	/		
	柔性导线 Flexible [mm²]	/		


材料 Material

绝缘材料	Insulation Material	PBT
阻燃等级	Flame retardant rating	UL94V-0
导体材料	Conductor Material	Copper alloy
导体表面镀层	Plating of conductor surface	Sn plated

一般参数 Other Data

间距/极数	Pitch/Poles [mm]/[P]	3.5/2*2~2*24
剥线长度	Stripping Length [mm]	/
螺丝/扭矩	Screw/Torque(Max) [N.m]	/
工作温度	Operating temperature [℃]	-30~+120
焊锡温度	Soldering temperature	250℃/5S
引针尺寸	Pin dimensions [mm]	0.8*0.8
PCB板孔径	PCB Hole Diameter [mm]	∅1.4

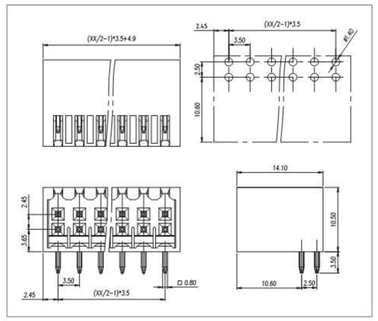



Pitch:3.5 mm

DB1ERHSM-3.5

UL/CUL 技术参数
UL/CUL Technical Data

等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	150	-	-
额定电流	Rated Current [A]	7	-	-
接线范围 Wire Range	单芯线 Solid [AWG]	/		
	多芯线 Stranded [AWG]	/		
耐电压	Dielectric Voltage-Withstand	1.3KV		

IEC 技术参数
IEC Technical Data


过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	160	160	250
额定电流	Rated Current [A]	10	10	10
额定冲击电压	Impulse withstand voltage [KV]	2.5	2.5	2.5
导线截面积 Conductor cross section	硬质导线 Solid [mm²]	/		
	柔性导线 Flexible [mm²]	/		

材料 Material

绝缘材料	Insulation Material	PBT
阻燃等级	Flame retardant rating	UL94V-0
导体材料	Conductor Material	Copper alloy
导体表面镀层	Plating of conductor surface	Sn plated

一般参数 Other Data

间距/极数	Pitch/Poles [mm]/[P]	3.5/2*2~2*24
剥线长度	Stripping Length [mm]	/
螺丝/扭矩	Screw/Torque(Max) [N.m]	/
工作温度	Operating temperature [℃]	-30~+120
焊锡温度	Soldering temperature	250℃/5S
引针尺寸	Pin dimensions [mm]	0.8*0.8
PCB板孔径	PCB Hole Diameter [mm]	∅1.4

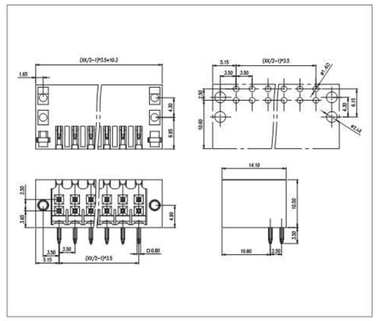



Pitch:2.54mm

DB2EK-2.54

UL/CUL 技术参数
UL/CUL Technical Data

等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	150	-	-
额定电流	Rated Current [A]	5	-	-
接线范围 Wire Range	单芯线 Solid [AWG]	26~20		
	多芯线 Stranded [AWG]	26~20		
耐电压	Dielectric Voltage-Withstand	1.3KV		

IEC 技术参数
IEC Technical Data


过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	100	160	320
额定电流	Rated Current [A]	5	5	5
额定冲击电压	Impulse withstand voltage [KV]	1.5	2.5	2.5
导线截面积 Conductor cross section	硬质导线 Solid [mm²]	0.2~0.5		
	柔性导线 Flexible [mm²]	0.2~0.5		

材料 Material

绝缘材料	Insulation Material	PA66
阻燃等级	Flame retardant rating	UL94V-0
导体材料	Conductor Material	Copper alloy
导体表面镀层	Plating of conductor surface	Ni plated

一般参数 Other Data

间距/极数	Pitch/Poles [mm]/[P]	2.54/2~24
剥线长度	Stripping Length [mm]	5~6
螺丝/扭矩	Screw/Torque(Max) [N.m]	/
工作温度	Operating temperature [℃]	-40~+105
焊锡温度	Soldering temperature	/
引针尺寸	Pin dimensions [mm]	/
PCB板孔径	PCB Hole Diameter [mm]	/

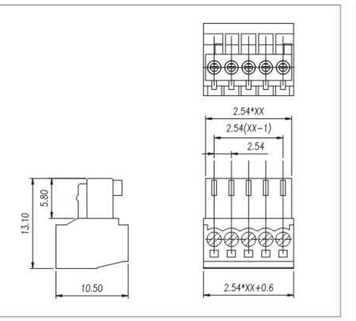



Pitch:3.5/3.81mm

DB2EK-3.5/3.81

UL/CUL 技术参数
UL/CUL Technical Data

等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	8	-	8
接线范围 Wire Range	单芯线 Solid [AWG]	28~16		
	多芯线 Stranded [AWG]	28~16		
耐电压	Dielectric Voltage-Withstand	1.6KV		

IEC 技术参数
IEC Technical Data


过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	160	160	250
额定电流	Rated Current [A]	7	7	7
额定冲击电压	Impulse withstand voltage [KV]	2.5	2.5	2.5
导线截面积 Conductor cross section	硬质导线 Solid [mm²]	0.5~1.5		
	柔性导线 Flexible [mm²]	0.5~1.5		

材料 Material

绝缘材料	Insulation Material	PA66
阻燃等级	Flame retardant rating	UL94V-0
导体材料	Conductor Material	Copper alloy
导体表面镀层	Plating of conductor surface	Ni plated

一般参数 Other Data

间距/极数	Pitch/Poles [mm]/[P]	3.5,3.81/2~24
剥线长度	Stripping Length [mm]	6-7
螺丝/扭矩	Screw/Torque(Max) [N.m]	M2/0.2
工作温度	Operating temperature [℃]	-40~+105
焊锡温度	Soldering temperature	/
引针尺寸	Pin dimensions [mm]	/
PCB板孔径	PCB Hole Diameter [mm]	/

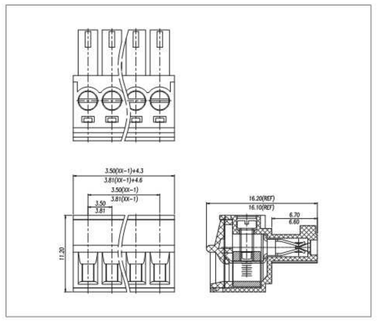




Pitch:3.5/3.81mm

DB2EKM–3.5/3.81

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	8	-	8
接线范围 Wire Range	单芯线 Solid [AWG]	28~16		
	多芯线 Stranded [AWG]	28~16		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	160	160	250
额定电流	Rated Current [A]	7	7	7
额定冲击电压	Impulse withstand voltage [KV]	2.5	2.5	2.5
导线截面积 Conductor cross section	硬质导线 Solid [mm²]	0.5~1.5		
	柔性导线 Flexible [mm²]	0.5~1.5		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Ni plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	3.5,3.81/2~24		
剥线长度	Stripping Length [mm]	6~7		
螺丝/扭矩	Screw/Torque(Max)[N.m]	M2/0.2		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	/		
引针尺寸	Pin dimensions [mm]	/		
PCB板孔径	PCB Hole Diameter [mm]	/		







Pitch:3.5/3.81mm

DB2EKA–3.5/3.81

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	8	-	8
接线范围 Wire Range	单芯线 Solid [AWG]	28~16		
	多芯线 Stranded [AWG]	28~16		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	160	160	320
额定电流	Rated Current [A]	7	7	7
额定冲击电压	Impulse withstand voltage [KV]	2.5	2.5	2.5
导线截面积 Conductor cross section	硬质导线 Solid [mm²]	0.2~1.5		
	柔性导线 Flexible [mm²]	0.2~1.5		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Ni plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	3.5,3.81/2~24		
剥线长度	Stripping Length [mm]	6~7		
螺丝/扭矩	Screw/Torque(Max)[N.m]	M2/0.2		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	/		
引针尺寸	Pin dimensions [mm]	/		
PCB板孔径	PCB Hole Diameter [mm]	/		






Pitch:3.5/3.81mm

DB2EKAM–3.5/3.81

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	8	-	8
接线范围 Wire Range	单芯线 Solid [AWG]	28~16		
	多芯线 Stranded [AWG]	28~16		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	160	160	320
额定电流	Rated Current [A]	7	7	7
额定冲击电压	Impulse withstand voltage [KV]	2.5	2.5	2.5
导线截面积 Conductor cross section	硬质导线 Solid [mm²]	0.2~1.5		
	柔性导线 Flexible [mm²]	0.2~1.5		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Ni plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	3.5,3.81/2~24		
剥线长度	Stripping Length [mm]	6~7		
螺丝/扭矩	Screw/Torque(Max)[N.m]	M2/0.2		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	/		
引针尺寸	Pin dimensions [mm]	/		
PCB板孔径	PCB Hole Diameter [mm]	/		






Pitch:3.5/3.81mm

DB2EKB–3.5/3.81

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	8	-	8
接线范围 Wire Range	单芯线 Solid [AWG]	28~16		
	多芯线 Stranded [AWG]	28~16		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	160	160	320
额定电流	Rated Current [A]	7	7	7
额定冲击电压	Impulse withstand voltage [KV]	2.5	2.5	2.5
导线截面积 Conductor cross section	硬质导线 Solid [mm²]	0.2~1.5		
	柔性导线 Flexible [mm²]	0.2~1.5		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Ni plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	3.5,3.81/2~24		
剥线长度	Stripping Length [mm]	6~7		
螺丝/扭矩	Screw/Torque(Max)[N.m]	M2/0.2		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	/		
引针尺寸	Pin dimensions [mm]	/		
PCB板孔径	PCB Hole Diameter [mm]	/		






Pitch:3.5/3.81mm

DB2EKBM–3.5/3.81

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	8	-	8
接线范围 Wire Range	单芯线 Solid [AWG]	28~16		
	多芯线 Stranded [AWG]	28~16		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	160	160	320
额定电流	Rated Current [A]	7	7	7
额定冲击电压	Impulse withstand voltage [KV]	2.5	2.5	2.5
导线截面积 Conductor cross section	硬质导线 Solid [mm²]	0.2~1.5		
	柔性导线 Flexible [mm²]	0.2~1.5		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Ni plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	3.5,3.81/2~24		
剥线长度	Stripping Length [mm]	6~7		
螺丝/扭矩	Screw/Torque(Max)[N.m]	M2/0.2		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	/		
引针尺寸	Pin dimensions [mm]	/		
PCB板孔径	PCB Hole Diameter [mm]	/		






Pitch:3.81mm

DB2EKC–3.81

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	8	-	8
接线范围 Wire Range	单芯线 Solid [AWG]	28~16		
	多芯线 Stranded [AWG]	28~16		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	160	160	320
额定电流	Rated Current [A]	7	7	7
额定冲击电压	Impulse withstand voltage [KV]	2.5	2.5	2.5
导线截面积 Conductor cross section	硬质导线 Solid [mm²]	0.5~1.5		
	柔性导线 Flexible [mm²]	0.5~1.5		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Ni plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	3.81/2~24		
剥线长度	Stripping Length [mm]	6~7		
螺丝/扭矩	Screw/Torque(Max)[N.m]	M2/0.2		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	/		
引针尺寸	Pin dimensions [mm]	/		
PCB板孔径	PCB Hole Diameter [mm]	/		

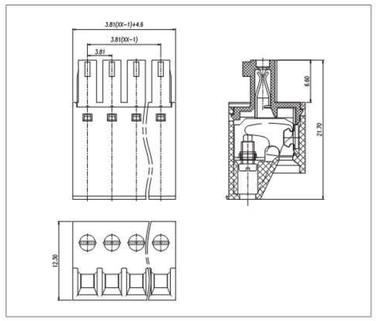




Pitch:3.81mm

DB2EKCM-3.81

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	8	-	8
接线范围 Wire Range	单芯线 Solid [AWG]	28~16		
	多芯线 Stranded [AWG]	28~16		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	160	160	320
额定电流	Rated Current [A]	7	7	7
额定冲击电压	Impulse withstand voltage [KV]	2.5	2.5	2.5
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	0.5~1.5		
	柔性导线 Flexible[mm²]	0.5~1.5		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Ni plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	3.81/2~24		
剥线长度	Stripping Length [mm]	6~7		
螺丝/扭矩	Screw/Torque(Max)[N.m]	M2/0.2		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	/		
引针尺寸	Pin dimensions [mm]	/		
PCB板孔径	PCB Hole Diameter [mm]	/		






Pitch:3.5/3.81mm

DB2EKD-3.5/3.81

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	8	-	8
接线范围 Wire Range	单芯线 Solid [AWG]	28~16		
	多芯线 Stranded [AWG]	28~16		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	160	160	320
额定电流	Rated Current [A]	7	7	7
额定冲击电压	Impulse withstand voltage [KV]	2.5	2.5	2.5
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	0.2~1.5		
	柔性导线 Flexible[mm²]	0.2~1.5		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Ni plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	3.5,3.81/2~24		
剥线长度	Stripping Length [mm]	7~8		
螺丝/扭矩	Screw/Torque(Max)[N.m]	/		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	/		
引针尺寸	Pin dimensions [mm]	/		
PCB板孔径	PCB Hole Diameter [mm]	/		







Pitch:3.5/3.81mm

DB2EKDM-3.5/3.81

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	8	-	8
接线范围 Wire Range	单芯线 Solid [AWG]	28~16		
	多芯线 Stranded [AWG]	28~16		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	160	160	320
额定电流	Rated Current [A]	7	7	7
额定冲击电压	Impulse withstand voltage [KV]	2.5	2.5	2.5
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	0.2~1.5		
	柔性导线 Flexible[mm²]	0.2~1.5		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Ni plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	3.5,3.81/2~24		
剥线长度	Stripping Length [mm]	7-8		
螺丝/扭矩	Screw/Torque(Max)[N.m]	/		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	/		
引针尺寸	Pin dimensions [mm]	/		
PCB板孔径	PCB Hole Diameter [mm]	/		






Pitch:3.5/3.81mm

DB2EB-3.5/3.81

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	8	-	8
接线范围 Wire Range	单芯线 Solid [AWG]	/		
	多芯线 Stranded [AWG]	/		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	160	160	320
额定电流	Rated Current [A]	7	7	7
额定冲击电压	Impulse withstand voltage [KV]	2.5	2.5	2.5
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	/		
	柔性导线 Flexible[mm²]	/		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	3.5,3.81/2~24		
剥线长度	Stripping Length [mm]	/		
螺丝/扭矩	Screw/Torque(Max)[N.m]	/		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	/		
引针尺寸	Pin dimensions [mm]	0.6*1.0		
PCB板孔径	PCB Hole Diameter [mm]	∅1.4		






Pitch:3.5/3.81mm

DB2EBM-3.5/3.81

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	8	-	8
接线范围 Wire Range	单芯线 Solid [AWG]	/		
	多芯线 Stranded [AWG]	/		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	160	160	320
额定电流	Rated Current [A]	7	7	7
额定冲击电压	Impulse withstand voltage [KV]	2.5	2.5	2.5
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	/		
	柔性导线 Flexible[mm²]	/		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	3.5,3.81/2~24		
剥线长度	Stripping Length [mm]	/		
螺丝/扭矩	Screw/Torque(Max)[N.m]	/		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	250℃ /5S		
引针尺寸	Pin dimensions [mm]	0.6*1.0		
PCB板孔径	PCB Hole Diameter [mm]	∅1.4		

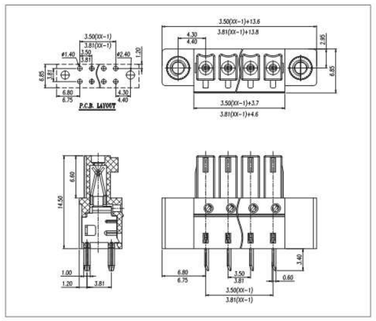




Pitch:3.5/3.81mm

DB2EA-3.5/3.81

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	8	-	8
接线范围 Wire Range	单芯线 Solid [AWG]	/		
	多芯线 Stranded [AWG]	/		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	160	160	320
额定电流	Rated Current [A]	7	7	7
额定冲击电压	Impulse withstand voltage [KV]	2.5	2.5	2.5
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	/		
	柔性导线 Flexible[mm²]	/		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	3.5,3.81/2~24		
剥线长度	Stripping Length [mm]	/		
螺丝/扭矩	Screw/Torque(Max)[N.m]	/		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	250℃ /5S		
引针尺寸	Pin dimensions [mm]	0.6*1.0		
PCB板孔径	PCB Hole Diameter [mm]	∅1.4		

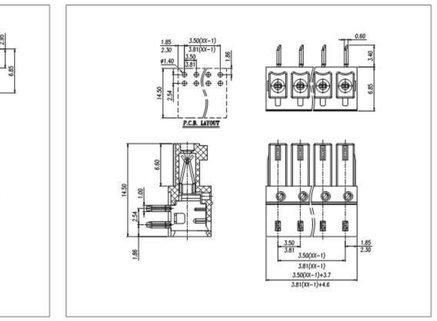





Pitch:3.5/3.81mm

DB2EAM-3.5/3.81

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	8	-	8
接线范围 Wire Range	单芯线 Solid [AWG]	/		
	多芯线 Stranded [AWG]	/		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	160	160	320
额定电流	Rated Current [A]	7	7	7
额定冲击电压	Impulse withstand voltage [KV]	2.5	2.5	2.5
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	/		
	柔性导线 Flexible[mm²]	/		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	3.5,3.81/2~24		
剥线长度	Stripping Length [mm]	/		
螺丝/扭矩	Screw/Torque(Max)[N.m]	/		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	250℃ /5S		
引针尺寸	Pin dimensions [mm]	0.6*1.0		
PCB板孔径	PCB Hole Diameter [mm]	∅1.4		






Pitch:3.5mm

DB2EBG-3.5

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	8	-	8
接线范围 Wire Range	单芯线 Solid [AWG]	/		
	多芯线 Stranded [AWG]	/		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	160	160	320
额定电流	Rated Current [A]	7	7	7
额定冲击电压	Impulse withstand voltage [KV]	2.5	2.5	2.5
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	/		
	柔性导线 Flexible[mm²]	/		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	3.5/2~24		
剥线长度	Stripping Length [mm]	/		
螺丝/扭矩	Screw/Torque(Max)[N.m]	/		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	250℃ /5S		
引针尺寸	Pin dimensions [mm]	0.6*1.0		
PCB板孔径	PCB Hole Diameter [mm]	∅1.4		

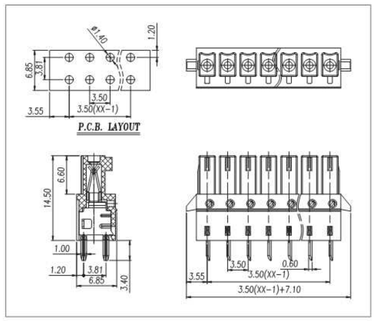





Pitch:3.5mm

DB2EAG-3.5

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	8	-	8
接线范围 Wire Range	单芯线 Solid [AWG]	/		
	多芯线 Stranded [AWG]	/		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	160	160	320
额定电流	Rated Current [A]	7	7	7
额定冲击电压	Impulse withstand voltage [KV]	2.5	2.5	2.5
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	/		
	柔性导线 Flexible[mm²]	/		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	3.5/2~24		
剥线长度	Stripping Length [mm]	/		
螺丝/扭矩	Screw/Torque(Max)[N.m]	/		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	250℃ /5S		
引针尺寸	Pin dimensions [mm]	0.6*1.0		
PCB板孔径	PCB Hole Diameter [mm]	∅1.4		

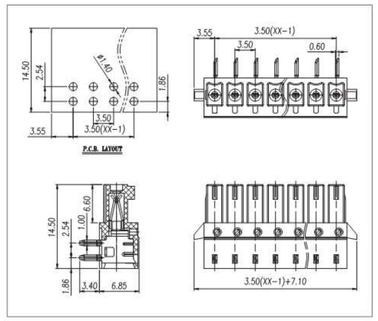





Pitch:3.81mm

DB2EKR-3.81

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	8	-	8
接线范围 Wire Range	单芯线 Solid [AWG]	28~16		
	多芯线 Stranded [AWG]	28~16		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	160	160	320
额定电流	Rated Current [A]	7	7	7
额定冲击电压	Impulse withstand voltage [KV]	2.5	2.5	2.5
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	0.5~1.5		
	柔性导线 Flexible[mm²]	0.5~1.5		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	3.81/2~24		
剥线长度	Stripping Length [mm]	6~7		
螺丝/扭矩	Screw/Torque(Max)[N.m]	M2/0.2		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	/		
引针尺寸	Pin dimensions [mm]	/		
PCB板孔径	PCB Hole Diameter [mm]	/		

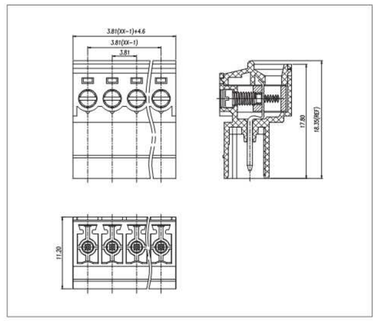


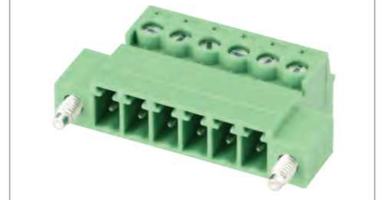


Pitch:3.81mm

DB2EKRM-3.81

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	8	-	8
接线范围 Wire Range	单芯线 Solid [AWG]	28~16		
	多芯线 Stranded [AWG]	28~16		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	160	160	320
额定电流	Rated Current [A]	7	7	7
额定冲击电压	Impulse withstand voltage [KV]	2.5	2.5	2.5
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	0.5~1.5		
	柔性导线 Flexible[mm²]	0.5~1.5		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	3.81/2~24		
剥线长度	Stripping Length [mm]	6~7		
螺丝/扭矩	Screw/Torque(Max)[N.m]	M2/0.2		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	/		
引针尺寸	Pin dimensions [mm]	/		
PCB板孔径	PCB Hole Diameter [mm]	/		

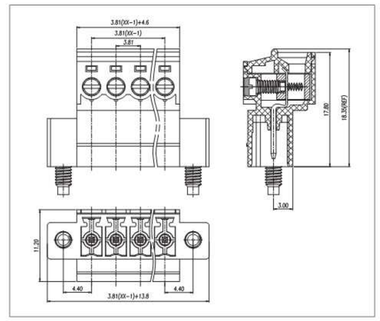


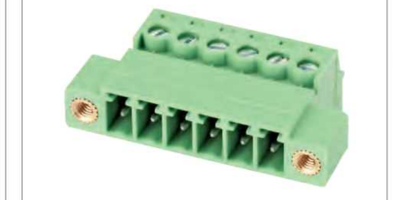

Pitch:3.81mm

DB2EKRN-3.81

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	8	-	8
接线范围 Wire Range	单芯线 Solid [AWG]	28~16		
	多芯线 Stranded [AWG]	28~16		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	160	160	320
额定电流	Rated Current [A]	7	7	7
额定冲击电压	Impulse withstand voltage [KV]	2.5	2.5	2.5
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	0.5~1.5		
	柔性导线 Flexible[mm²]	0.5~1.5		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	3.81/2~24		
剥线长度	Stripping Length [mm]	6~7		
螺丝/扭矩	Screw/Torque(Max)[N.m]	M2/0.2		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	/		
引针尺寸	Pin dimensions [mm]	/		
PCB板孔径	PCB Hole Diameter [mm]	/		

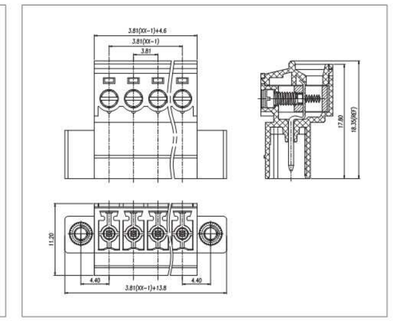




Pitch:3.5mm

DB2EKNR-3.5

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	8	-	8
接线范围 Wire Range	单芯线 Solid [AWG]	24~16		
	多芯线 Stranded [AWG]	24~16		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	160	160	320
额定电流	Rated Current [A]	8	8	8
额定冲击电压	Impulse withstand voltage [KV]	2.5	2.5	2.5
导线截面积 Conductor cross section	硬质导线 Solid [mm²]	0.5~1.5		
	柔性导线 Flexible [mm²]	0.5~1.5		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	3.5/2~24		
剥线长度	Stripping Length [mm]	9~10		
螺丝/扭矩	Screw/Torque(Max) [N.m]	/		
工作温度	Operating temperature [℃]	-40~+105		
焊锡温度	Soldering temperature	/		
引针尺寸	Pin dimensions [mm]	/		
PCB板孔径	PCB Hole Diameter [mm]	/		






Pitch:3.5mm

DB2EKNRT-3.5

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	8	-	8
接线范围 Wire Range	单芯线 Solid [AWG]	24~16		
	多芯线 Stranded [AWG]	24~16		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	160	160	320
额定电流	Rated Current [A]	8	8	8
额定冲击电压	Impulse withstand voltage [KV]	2.5	2.5	2.5
导线截面积 Conductor cross section	硬质导线 Solid [mm²]	0.5~1.5		
	柔性导线 Flexible [mm²]	0.5~1.5		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	3.5/2~24		
剥线长度	Stripping Length [mm]	9~10		
螺丝/扭矩	Screw/Torque(Max) [N.m]	/		
工作温度	Operating temperature [℃]	-40~+105		
焊锡温度	Soldering temperature	/		
引针尺寸	Pin dimensions [mm]	/		
PCB板孔径	PCB Hole Diameter [mm]	/		






Pitch:3.5 mm

DB2EKNRG-3.5

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	8	-	8
接线范围 Wire Range	单芯线 Solid [AWG]	24~16		
	多芯线 Stranded [AWG]	24~16		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	160	160	320
额定电流	Rated Current [A]	8	8	8
额定冲击电压	Impulse withstand voltage [KV]	2.5	2.5	2.5
导线截面积 Conductor cross section	硬质导线 Solid [mm²]	0.5~1.5		
	柔性导线 Flexible [mm²]	0.5~1.5		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	3.5/2~24		
剥线长度	Stripping Length [mm]	9~10		
螺丝/扭矩	Screw/Torque(Max) [N.m]	/		
工作温度	Operating temperature [℃]	-40~+105		
焊锡温度	Soldering temperature	/		
引针尺寸	Pin dimensions [mm]	/		
PCB板孔径	PCB Hole Diameter [mm]	/		






Pitch:3.81mm

DB2EGB-3.81

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	8	-	8
接线范围 Wire Range	单芯线 Solid [AWG]	28~16		
	多芯线 Stranded [AWG]	28~16		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	160	160	320
额定电流	Rated Current [A]	7	7	7
额定冲击电压	Impulse withstand voltage [KV]	2.5	2.5	2.5
导线截面积 Conductor cross section	硬质导线 Solid [mm²]	0.5~1.5		
	柔性导线 Flexible [mm²]	0.5~1.5		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	3.81/2~24		
剥线长度	Stripping Length [mm]	6-7		
螺丝/扭矩	Screw/Torque(Max) [N.m]	M2/0.2		
工作温度	Operating temperature [℃]	-40~+105		
焊锡温度	Soldering temperature	/		
引针尺寸	Pin dimensions [mm]	/		
PCB板孔径	PCB Hole Diameter [mm]	/		

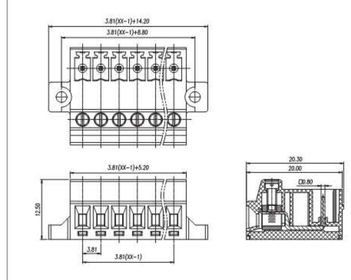





Pitch:3.81mm

DB2EGBM-3.81

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	8	-	8
接线范围 Wire Range	单芯线 Solid [AWG]	28~16		
	多芯线 Stranded [AWG]	28~16		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	160	160	320
额定电流	Rated Current [A]	7	7	7
额定冲击电压	Impulse withstand voltage [KV]	2.5	2.5	2.5
导线截面积 Conductor cross section	硬质导线 Solid [mm²]	0.5~1.5		
	柔性导线 Flexible [mm²]	0.5~1.5		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	3.81/2~24		
剥线长度	Stripping Length [mm]	6-7		
螺丝/扭矩	Screw/Torque(Max) [N.m]	M2/0.2		
工作温度	Operating temperature [℃]	-40~+105		
焊锡温度	Soldering temperature	/		
引针尺寸	Pin dimensions [mm]	/		
PCB板孔径	PCB Hole Diameter [mm]	/		

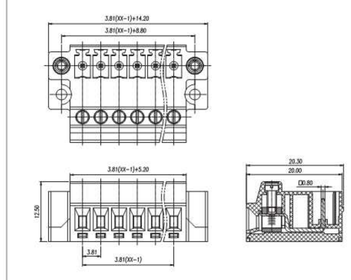





Pitch:3.5/3.81mm

DB2EVC-3.5/3.81

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	8	-	8
接线范围 Wire Range	单芯线 Solid [AWG]	/		
	多芯线 Stranded [AWG]	/		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	160	160	250
额定电流	Rated Current [A]	7	7	7
额定冲击电压	Impulse withstand voltage [KV]	2.5	2.5	2.5
导线截面积 Conductor cross section	硬质导线 Solid [mm²]	/		
	柔性导线 Flexible [mm²]	/		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	3.5,3.81/2~24		
剥线长度	Stripping Length [mm]	/		
螺丝/扭矩	Screw/Torque(Max) [N.m]	/		
工作温度	Operating temperature [℃]	-40~+105		
焊锡温度	Soldering temperature	250℃ /5S		
引针尺寸	Pin dimensions [mm]	0.8*0.8		
PCB板孔径	PCB Hole Diameter [mm]	∅1.4		







Pitch:3.5/3.81mm

DB2ERC-3.5/3.81

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	8	-	8
接线范围 Wire Range	单芯线 Solid [AWG]	/		
	多芯线 Stranded [AWG]	/		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	160	160	250
额定电流	Rated Current [A]	7	7	7
额定冲击电压	Impulse withstand voltage [KV]	2.5	2.5	2.5
导线截面积 Conductor cross section	硬质导线 Solid [mm²]	/		
	柔性导线 Flexible [mm²]	/		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	3.5,3.81/2~24		
剥线长度	Stripping Length [mm]	/		
螺丝/扭矩	Screw/Torque(Max)[N.m]	/		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	250℃ /5S		
引针尺寸	Pin dimensions [mm]	0.8*0.8		
PCB板孔径	PCB Hole Diameter [mm]	∅1.4		






Pitch:3.5/3.81mm

DB2EVM-3.5/3.81

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	8	-	8
接线范围 Wire Range	单芯线 Solid [AWG]	/		
	多芯线 Stranded [AWG]	/		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	160	160	250
额定电流	Rated Current [A]	7	7	7
额定冲击电压	Impulse withstand voltage [KV]	2.5	2.5	2.5
导线截面积 Conductor cross section	硬质导线 Solid [mm²]	/		
	柔性导线 Flexible [mm²]	/		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	3.5,3.81/2~24		
剥线长度	Stripping Length [mm]	/		
螺丝/扭矩	Screw/Torque(Max)[N.m]	/		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	250℃ /5S		
引针尺寸	Pin dimensions [mm]	0.8*0.8		
PCB板孔径	PCB Hole Diameter [mm]	∅1.4		







Pitch:3.5/3.81mm

DB2ERM-3.5/3.81

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	8	-	8
接线范围 Wire Range	单芯线 Solid [AWG]	/		
	多芯线 Stranded [AWG]	/		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	160	160	250
额定电流	Rated Current [A]	7	7	7
额定冲击电压	Impulse withstand voltage [KV]	2.5	2.5	2.5
导线截面积 Conductor cross section	硬质导线 Solid [mm²]	/		
	柔性导线 Flexible [mm²]	/		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	3.5,3.81/2~24		
剥线长度	Stripping Length [mm]	/		
螺丝/扭矩	Screw/Torque(Max)[N.m]	/		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	250℃ /5S		
引针尺寸	Pin dimensions [mm]	0.8*0.8		
PCB板孔径	PCB Hole Diameter [mm]	∅1.4		






Pitch:3.5/3.81mm

DB2ELC-3.5/3.81

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	8	-	8
接线范围 Wire Range	单芯线 Solid [AWG]	/		
	多芯线 Stranded [AWG]	/		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	160	160	320
额定电流	Rated Current [A]	7	7	7
额定冲击电压	Impulse withstand voltage [KV]	2.5	2.5	2.5
导线截面积 Conductor cross section	硬质导线 Solid [mm²]	/		
	柔性导线 Flexible [mm²]	/		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	3.5,3.81/2~24		
剥线长度	Stripping Length [mm]	/		
螺丝/扭矩	Screw/Torque(Max)[N.m]	/		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	250℃ /5S		
引针尺寸	Pin dimensions [mm]	0.8*0.8		
PCB板孔径	PCB Hole Diameter [mm]	∅1.2		






Pitch:3.5/3.81mm

DB2ELM-3.5/3.81

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	8	-	8
接线范围 Wire Range	单芯线 Solid [AWG]	/		
	多芯线 Stranded [AWG]	/		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	160	160	320
额定电流	Rated Current [A]	7	7	7
额定冲击电压	Impulse withstand voltage [KV]	2.5	2.5	2.5
导线截面积 Conductor cross section	硬质导线 Solid [mm²]	/		
	柔性导线 Flexible [mm²]	/		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	3.5,3.81/2~24		
剥线长度	Stripping Length [mm]	/		
螺丝/扭矩	Screw/Torque(Max)[N.m]	/		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	250℃ /5S		
引针尺寸	Pin dimensions [mm]	0.8*0.8		
PCB板孔径	PCB Hole Diameter [mm]	∅1.2		






Pitch:3.81mm

DB2CM-3.81

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	8	-	8
接线范围 Wire Range	单芯线 Solid [AWG]	/		
	多芯线 Stranded [AWG]	/		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	160	160	320
额定电流	Rated Current [A]	7	7	7
额定冲击电压	Impulse withstand voltage [KV]	2.5	2.5	2.5
导线截面积 Conductor cross section	硬质导线 Solid [mm²]	/		
	柔性导线 Flexible [mm²]	/		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	3.81/2~24		
剥线长度	Stripping Length [mm]	/		
螺丝/扭矩	Screw/Torque(Max)[N.m]	/		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	250℃ /5S		
引针尺寸	Pin dimensions [mm]	/		
PCB板孔径	PCB Hole Diameter [mm]	/		

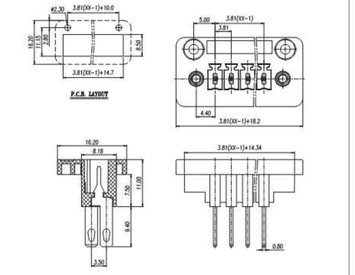




Pitch:3.81mm

DB2EVF–3.81

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	8	-	8
接线范围 Wire Range	单芯线 Solid [AWG]	/		
	多芯线 Stranded [AWG]	/		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	160	160	250
额定电流	Rated Current [A]	7	7	7
额定冲击电压	Impulse withstand voltage [KV]	2.5	2.5	2.5
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	/		
	柔性导线 Flexible[mm²]	/		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	3.81/2~24		
剥线长度	Stripping Length [mm]	/		
螺丝/扭矩	Screw/Torque(Max)[N.m]	/		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	250℃ /5S		
引针尺寸	Pin dimensions [mm]	/		
PCB板孔径	PCB Hole Diameter [mm]	/		







Pitch:5.08mm

DB1EK–5.08

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	8	-	8
接线范围 Wire Range	单芯线 Solid [AWG]	28~16		
	多芯线 Stranded [AWG]	28~16		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	250	320	630
额定电流	Rated Current [A]	7	7	7
额定冲击电压	Impulse withstand voltage [KV]	4	4	4
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	0.5~1.5		
	柔性导线 Flexible[mm²]	0.5~1.5		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Ni plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	5.08/2~24		
剥线长度	Stripping Length [mm]	6~7		
螺丝/扭矩	Screw/Torque(Max)[N.m]	M2/0.2		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	/		
引针尺寸	Pin dimensions [mm]	/		
PCB板孔径	PCB Hole Diameter [mm]	/		




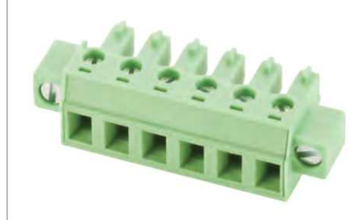


Pitch:5.08mm

DB1EKM–5.08

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	8	-	8
接线范围 Wire Range	单芯线 Solid [AWG]	28~16		
	多芯线 Stranded [AWG]	28~16		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	250	320	630
额定电流	Rated Current [A]	7	7	7
额定冲击电压	Impulse withstand voltage [KV]	4	4	4
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	0.5~1.5		
	柔性导线 Flexible[mm²]	0.5~1.5		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Ni plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	5.08/2~24		
剥线长度	Stripping Length [mm]	6~7		
螺丝/扭矩	Screw/Torque(Max)[N.m]	M2/0.2		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	/		
引针尺寸	Pin dimensions [mm]	/		
PCB板孔径	PCB Hole Diameter [mm]	/		






Pitch:5.08mm

DB1EVC–5.08

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	8	-	8
接线范围 Wire Range	单芯线 Solid [AWG]	/		
	多芯线 Stranded [AWG]	/		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	250	320	400
额定电流	Rated Current [A]	7	7	7
额定冲击电压	Impulse withstand voltage [KV]	4	4	4
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	/		
	柔性导线 Flexible[mm²]	/		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	5.08/2~24		
剥线长度	Stripping Length [mm]	/		
螺丝/扭矩	Screw/Torque(Max)[N.m]	/		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	250℃ /5S		
引针尺寸	Pin dimensions [mm]	0.8*0.8		
PCB板孔径	PCB Hole Diameter [mm]	∅1.4		

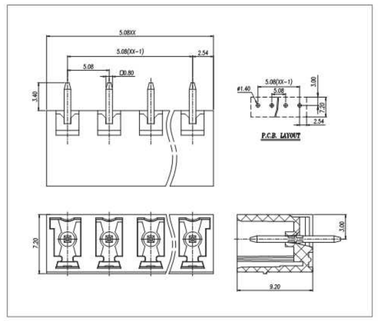





Pitch:5.08mm

DB1ERC–5.08

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	8	-	8
接线范围 Wire Range	单芯线 Solid [AWG]	/		
	多芯线 Stranded [AWG]	/		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	250	320	400
额定电流	Rated Current [A]	7	7	7
额定冲击电压	Impulse withstand voltage [KV]	4	4	4
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	/		
	柔性导线 Flexible[mm²]	/		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	5.08/2~24		
剥线长度	Stripping Length [mm]	/		
螺丝/扭矩	Screw/Torque(Max)[N.m]	/		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	250℃ /5S		
引针尺寸	Pin dimensions [mm]	0.8*0.8		
PCB板孔径	PCB Hole Diameter [mm]	∅1.4		

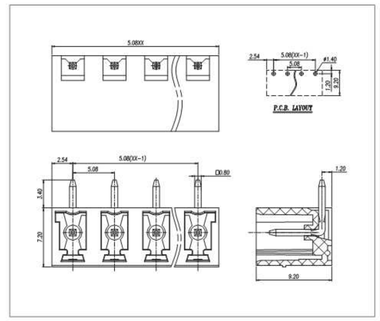


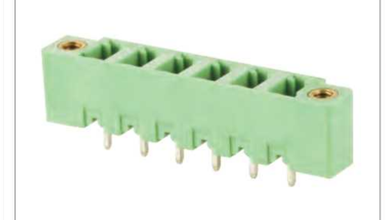

Pitch:5.08mm

DB1EVM–5.08

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	8	-	8
接线范围 Wire Range	单芯线 Solid [AWG]	/		
	多芯线 Stranded [AWG]	/		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	250	320	400
额定电流	Rated Current [A]	7	7	7
额定冲击电压	Impulse withstand voltage [KV]	4	4	4
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	/		
	柔性导线 Flexible[mm²]	/		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	5.08/2~24		
剥线长度	Stripping Length [mm]	/		
螺丝/扭矩	Screw/Torque(Max)[N.m]	/		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	250℃ /5S		
引针尺寸	Pin dimensions [mm]	0.8*0.8		
PCB板孔径	PCB Hole Diameter [mm]	∅1.4		

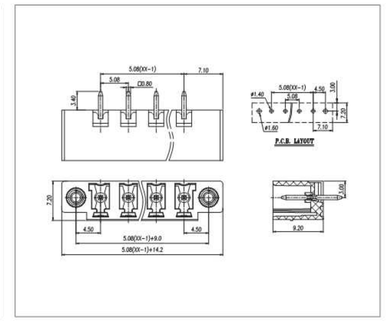




Pitch:5.08mm

DB1ERM-5.08

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	8	-	8
接线范围 Wire Range	单芯线 Solid [AWG]	/		
	多芯线 Stranded [AWG]	/		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	250	320	400
额定电流	Rated Current [A]	7	7	7
额定冲击电压	Impulse withstand voltage [KV]	4	4	4
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	/		
	柔性导线 Flexible[mm²]	/		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	5.08/2~24		
剥线长度	Stripping Length [mm]	/		
螺丝/扭矩	Screw/Torque(Max)[N.m]	/		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	250℃ /5S		
引针尺寸	Pin dimensions [mm]	0.8*0.8		
PCB板孔径	PCB Hole Diameter [mm]	∅1.4		






Pitch:3.5/3.81mm

DB2EVT-3.5/3.81

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	8	-	8
接线范围 Wire Range	单芯线 Solid [AWG]	/		
	多芯线 Stranded [AWG]	/		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	160	160	320
额定电流	Rated Current [A]	7	7	7
额定冲击电压	Impulse withstand voltage [KV]	2.5	2.5	2.5
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	/		
	柔性导线 Flexible[mm²]	/		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	3.5,3.81/ 2*2~2*24		
剥线长度	Stripping Length [mm]	/		
螺丝/扭矩	Screw/Torque(Max)[N.m]	/		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	250℃ /5S		
引针尺寸	Pin dimensions [mm]	0.8*0.8		
PCB板孔径	PCB Hole Diameter [mm]	∅1.4		






Pitch:3.5/3.81mm

DB2EVTM-3.5/3.81

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	8	-	8
接线范围 Wire Range	单芯线 Solid [AWG]	/		
	多芯线 Stranded [AWG]	/		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	160	160	320
额定电流	Rated Current [A]	7	7	7
额定冲击电压	Impulse withstand voltage [KV]	2.5	2.5	2.5
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	/		
	柔性导线 Flexible[mm²]	/		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	3.5,3.81/ 2*2~2*24		
剥线长度	Stripping Length [mm]	/		
螺丝/扭矩	Screw/Torque(Max)[N.m]	/		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	250℃ /5S		
引针尺寸	Pin dimensions [mm]	0.8*0.8		
PCB板孔径	PCB Hole Diameter [mm]	∅1.4		






Pitch:3.5/3.81mm

DB2ERT-3.5/3.81

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	8	-	8
接线范围 Wire Range	单芯线 Solid [AWG]	/		
	多芯线 Stranded [AWG]	/		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	160	160	320
额定电流	Rated Current [A]	7	7	7
额定冲击电压	Impulse withstand voltage [KV]	2.5	2.5	2.5
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	/		
	柔性导线 Flexible[mm²]	/		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	3.5,3.81/ 2*2~2*24		
剥线长度	Stripping Length [mm]	/		
螺丝/扭矩	Screw/Torque(Max)[N.m]	/		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	250℃ /5S		
引针尺寸	Pin dimensions [mm]	0.8*0.8		
PCB板孔径	PCB Hole Diameter [mm]	∅1.4		






Pitch:3.5/3.81mm

DB2ERTM-3.5/3.81

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	8	-	8
接线范围 Wire Range	单芯线 Solid [AWG]	/		
	多芯线 Stranded [AWG]	/		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	160	160	320
额定电流	Rated Current [A]	7	7	7
额定冲击电压	Impulse withstand voltage [KV]	2.5	2.5	2.5
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	/		
	柔性导线 Flexible[mm²]	/		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	3.5,3.81/ 2*2~2*24		
剥线长度	Stripping Length [mm]	/		
螺丝/扭矩	Screw/Torque(Max)[N.m]	/		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	250℃ /5S		
引针尺寸	Pin dimensions [mm]	0.8*0.8		
PCB板孔径	PCB Hole Diameter [mm]	∅1.4		






Pitch:3.5/3.81mm

DB2EVH-3.5/3.81

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	8	-	8
接线范围 Wire Range	单芯线 Solid [AWG]	/		
	多芯线 Stranded [AWG]	/		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	160	160	320
额定电流	Rated Current [A]	7	7	7
额定冲击电压	Impulse withstand voltage [KV]	2.5	2.5	2.5
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	/		
	柔性导线 Flexible[mm²]	/		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	3.5,3.81/ 2*2~2*24		
剥线长度	Stripping Length [mm]	/		
螺丝/扭矩	Screw/Torque(Max)[N.m]	/		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	250℃ /5S		
引针尺寸	Pin dimensions [mm]	0.8*0.8		
PCB板孔径	PCB Hole Diameter [mm]	∅1.4		

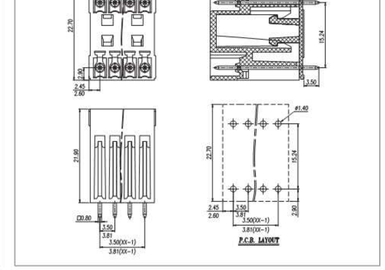




Pitch:3.5/3.81mm

DB2EVHM-3.5/3.81

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	8	-	8
接线范围 Wire Range	单芯线 Solid [AWG]	/		
	多芯线 Stranded [AWG]	/		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	160	160	320
额定电流	Rated Current [A]	7	7	7
额定冲击电压	Impulse withstand voltage [KV]	2.5	2.5	2.5
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	/		
	柔性导线 Flexible[mm²]	/		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	3.5,3.81/ 2*2~2*24		
剥线长度	Stripping Length [mm]	/		
螺丝/扭矩	Screw/Torque(Max)[N.m]	/		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	250℃ /5S		
引针尺寸	Pin dimensions [mm]	0.8*0.8		
PCB板孔径	PCB Hole Diameter [mm]	∅1.4		







Pitch:3.5/3.81mm

DB2ERH-3.5/3.81

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	8	-	8
接线范围 Wire Range	单芯线 Solid [AWG]	/		
	多芯线 Stranded [AWG]	/		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	160	160	320
额定电流	Rated Current [A]	7	7	7
额定冲击电压	Impulse withstand voltage [KV]	2.5	2.5	2.5
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	/		
	柔性导线 Flexible[mm²]	/		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	3.5,3.81/ 2*2~2*24		
剥线长度	Stripping Length [mm]	/		
螺丝/扭矩	Screw/Torque(Max)[N.m]	/		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	250℃ /5S		
引针尺寸	Pin dimensions [mm]	0.8*0.8		
PCB板孔径	PCB Hole Diameter [mm]	∅1.4		






Pitch:3.5/3.81mm

DB2ERHM-3.5/3.81

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	8	-	8
接线范围 Wire Range	单芯线 Solid [AWG]	/		
	多芯线 Stranded [AWG]	/		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	160	160	320
额定电流	Rated Current [A]	7	7	7
额定冲击电压	Impulse withstand voltage [KV]	2.5	2.5	2.5
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	/		
	柔性导线 Flexible[mm²]	/		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	3.5,3.81/ 2*2~2*24		
剥线长度	Stripping Length [mm]	/		
螺丝/扭矩	Screw/Torque(Max)[N.m]	/		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	250℃ /5S		
引针尺寸	Pin dimensions [mm]	0.8*0. 8		
PCB板孔径	PCB Hole Diameter [mm]	∅1.4		






Pitch:5.0/5.08mm

DB2EK-5.08

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	15	-	10
接线范围 Wire Range	单芯线 Solid [AWG]	28~12		
	多芯线 Stranded [AWG]	28~12		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	250	320	630
额定电流	Rated Current [A]	10	10	10
额定冲击电压	Impulse withstand voltage [KV]	4	4	4
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	0.5~2.5		
	柔性导线 Flexible[mm²]	0.5~2.5		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Ni plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	5.0,5.08/2~24		
剥线长度	Stripping Length [mm]	7-8		
螺丝/扭矩	Screw/Torque(Max)[N.m]	M3/0.5		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	/		
引针尺寸	Pin dimensions [mm]	/		
PCB板孔径	PCB Hole Diameter [mm]	/		






Pitch:7.5/7.62mm

DB2EK-7.62

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	15	-	10
接线范围 Wire Range	单芯线 Solid [AWG]	28~12		
	多芯线 Stranded [AWG]	28~12		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	400	630	1000
额定电流	Rated Current [A]	10	10	10
额定冲击电压	Impulse withstand voltage [KV]	6	6	6
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	0.5~2.5		
	柔性导线 Flexible[mm²]	0.5~2.5		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Ni plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	7.5,7.62/2~24		
剥线长度	Stripping Length [mm]	7~8		
螺丝/扭矩	Screw/Torque(Max)[N.m]	M3/0.5		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	/		
引针尺寸	Pin dimensions [mm]	/		
PCB板孔径	PCB Hole Diameter [mm]	/		

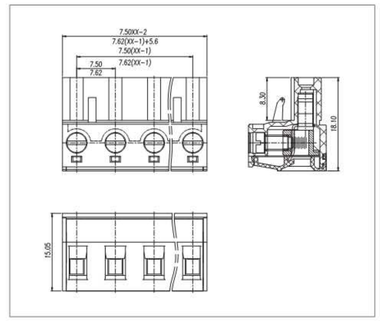




Pitch:10.0/10.16mm

DB2EK-10.16

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	600	-	600
额定电流	Rated Current [A]	15	-	5
接线范围 Wire Range	单芯线 Solid [AWG]	28~12		
	多芯线 Stranded [AWG]	28~12		
耐电压	Dielectric Voltage-Withstand	2.2KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	630	1000	1000
额定电流	Rated Current [A]	10	10	10
额定冲击电压	Impulse withstand voltage [KV]	6	6	6
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	0.5~2.5		
	柔性导线 Flexible[mm²]	0.5~2.5		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Ni plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	10,10.16/2~12		
剥线长度	Stripping Length [mm]	7-8		
螺丝/扭矩	Screw/Torque(Max)[N.m]	M3/0.5		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	/		
引针尺寸	Pin dimensions [mm]	/		
PCB板孔径	PCB Hole Diameter [mm]	/		

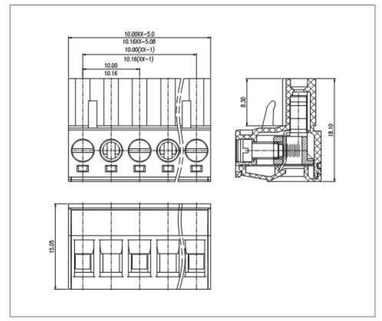




Pitch:5.0/5.08mm

DB2EKM-5.08

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	15	-	10
接线范围 Wire Range	单芯线 Solid [AWG]	28~12		
	多芯线 Stranded [AWG]	28~12		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	250	320	630
额定电流	Rated Current [A]	10	10	10
额定冲击电压	Impulse withstand voltage [KV]	4	4	4
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	0.5~2.5		
	柔性导线 Flexible[mm²]	0.5~2.5		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Ni plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	5.0,5.08/2~24		
剥线长度	Stripping Length [mm]	7~8		
螺丝/扭矩	Screw/Torque(Max)[N.m]	M3/0.5		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	/		
引针尺寸	Pin dimensions [mm]	/		
PCB板孔径	PCB Hole Diameter [mm]	/		






Pitch:7.5/7.62mm

DB2EKM-7.62

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	15	-	10
接线范围 Wire Range	单芯线 Solid [AWG]	28~12		
	多芯线 Stranded [AWG]	28~12		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	400	630	1000
额定电流	Rated Current [A]	10	10	10
额定冲击电压	Impulse withstand voltage [KV]	6	6	6
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	0.5~2.5		
	柔性导线 Flexible[mm²]	0.5~2.5		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Ni plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	7.5,7.62/2~24		
剥线长度	Stripping Length [mm]	7~8		
螺丝/扭矩	Screw/Torque(Max)[N.m]	M3/0.5		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	/		
引针尺寸	Pin dimensions [mm]	/		
PCB板孔径	PCB Hole Diameter [mm]	/		






Pitch:10.0/10.16mm

DB2EKM-10.16

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	600	-	600
额定电流	Rated Current [A]	15	-	5
接线范围 Wire Range	单芯线 Solid [AWG]	28~12		
	多芯线 Stranded [AWG]	28~12		
耐电压	Dielectric Voltage-Withstand	2.2KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	630	1000	1000
额定电流	Rated Current [A]	10	10	10
额定冲击电压	Impulse withstand voltage [KV]	6	6	6
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	0.5~2.5		
	柔性导线 Flexible[mm²]	0.5~2.5		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Ni plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	10,10.16/2~12		
剥线长度	Stripping Length [mm]	7~8		
螺丝/扭矩	Screw/Torque(Max)[N.m]	M3/0.5		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	/		
引针尺寸	Pin dimensions [mm]	/		
PCB板孔径	PCB Hole Diameter [mm]	/		






Pitch:5.08mm

DB2EKH-5.08

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	15	-	10
接线范围 Wire Range	单芯线 Solid [AWG]	28~12		
	多芯线 Stranded [AWG]	28~12		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	250	320	630
额定电流	Rated Current [A]	12	12	12
额定冲击电压	Impulse withstand voltage [KV]	4	4	4
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	0.2~2.5		
	柔性导线 Flexible[mm²]	0.2~2.5		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	5.08/2~24		
剥线长度	Stripping Length [mm]	7-8		
螺丝/扭矩	Screw/Torque(Max)[N.m]	M3/0.5		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	/		
引针尺寸	Pin dimensions [mm]	/		
PCB板孔径	PCB Hole Diameter [mm]	/		






Pitch:5.08mm

DB2EKHM-5.08

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	15	-	10
接线范围 Wire Range	单芯线 Solid [AWG]	28~12		
	多芯线 Stranded [AWG]	28~12		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	250	320	630
额定电流	Rated Current [A]	12	12	12
额定冲击电压	Impulse withstand voltage [KV]	4	4	4
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	0.2~2.5		
	柔性导线 Flexible[mm²]	0.2~2.5		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	5.08/2~24		
剥线长度	Stripping Length [mm]	7-8		
螺丝/扭矩	Screw/Torque(Max)[N.m]	M3/0.5		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	/		
引针尺寸	Pin dimensions [mm]	/		
PCB板孔径	PCB Hole Diameter [mm]	/		






Pitch:5.0/5.08mm

DB2EKA-5.08

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	15	-	10
接线范围 Wire Range	单芯线 Solid [AWG]	28~12		
	多芯线 Stranded [AWG]	28~12		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	250	320	630
额定电流	Rated Current [A]	12	12	12
额定冲击电压	Impulse withstand voltage [KV]	4	4	4
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	0.2~2.5		
	柔性导线 Flexible[mm²]	0.2~2.5		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Ni plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	5.0,5.08/2~24		
剥线长度	Stripping Length [mm]	7~8mm		
螺丝/扭矩	Screw/Torque(Max)[N.m]	M3/0.5		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	/		
引针尺寸	Pin dimensions [mm]	/		
PCB板孔径	PCB Hole Diameter [mm]	/		






Pitch:7.5/7.62mm

DB2EKA-7.62

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	15	-	10
接线范围 Wire Range	单芯线 Solid [AWG]	28~12		
	多芯线 Stranded [AWG]	28~12		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	500	630	1000
额定电流	Rated Current [A]	12	12	12
额定冲击电压	Impulse withstand voltage [KV]	6	6	6
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	0.2~2.5		
	柔性导线 Flexible[mm²]	0.2~2.5		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Ni plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	7.5,7.62/2~24		
剥线长度	Stripping Length [mm]	7~8mm		
螺丝/扭矩	Screw/Torque(Max)[N.m]	M3/0.5		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	/		
引针尺寸	Pin dimensions [mm]	/		
PCB板孔径	PCB Hole Diameter [mm]	/		






Pitch:5.0/5.08mm

DB2EKAM-5.08

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	15	-	10
接线范围 Wire Range	单芯线 Solid [AWG]	28~12		
	多芯线 Stranded [AWG]	28~12		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	250	320	630
额定电流	Rated Current [A]	12	12	12
额定冲击电压	Impulse withstand voltage [KV]	4	4	4
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	0.2~2.5		
	柔性导线 Flexible[mm²]	0.2~2.5		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Ni plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	5.0,5.08/2~24		
剥线长度	Stripping Length [mm]	7~8mm		
螺丝/扭矩	Screw/Torque(Max)[N.m]	M3/0.5		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	/		
引针尺寸	Pin dimensions [mm]	/		
PCB板孔径	PCB Hole Diameter [mm]	/		






Pitch:7.5/7.62mm

DB2EKAM-7.62

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	15	-	10
接线范围 Wire Range	单芯线 Solid [AWG]	28~12		
	多芯线 Stranded [AWG]	28~12		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	500	630	1000
额定电流	Rated Current [A]	12	12	12
额定冲击电压	Impulse withstand voltage [KV]	6	6	6
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	0.2~2.5		
	柔性导线 Flexible[mm²]	0.2~2.5		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Ni plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	7.5,7.62/2~24		
剥线长度	Stripping Length [mm]	7~8		
螺丝/扭矩	Screw/Torque(Max)[N.m]	M3/0.5		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	/		
引针尺寸	Pin dimensions [mm]	/		
PCB板孔径	PCB Hole Diameter [mm]	/		






Pitch:5.0/5.08mm

DB2EKB-5.08

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	15	-	10
接线范围 Wire Range	单芯线 Solid [AWG]	28~12		
	多芯线 Stranded [AWG]	28~12		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	250	320	630
额定电流	Rated Current [A]	12	12	12
额定冲击电压	Impulse withstand voltage [KV]	4	4	4
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	0.2~2.5		
	柔性导线 Flexible[mm²]	0.2~2.5		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Ni plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	5.0.5.08/2-24		
剥线长度	Stripping Length [mm]	7-8		
螺丝/扭矩	Screw/Torque(Max)[N.m]	M3/0.5		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	/		
引针尺寸	Pin dimensions [mm]	/		
PCB板孔径	PCB Hole Diameter [mm]	/		

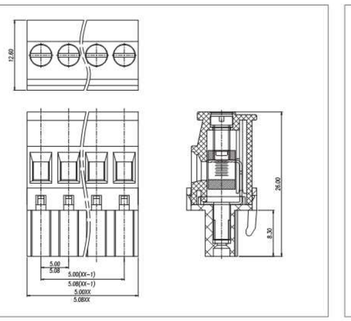




Pitch:7.5/7.62mm

DB2EKB-7.62

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	15	-	10
接线范围 Wire Range	单芯线 Solid [AWG]	28~12		
	多芯线 Stranded [AWG]	28~12		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	500	630	1000
额定电流	Rated Current [A]	12	12	12
额定冲击电压	Impulse withstand voltage [KV]	6	6	6
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	0.2~2.5		
	柔性导线 Flexible[mm²]	0.2~2.5		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Ni plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	7.5,7.62/2~24		
剥线长度	Stripping Length [mm]	7~8		
螺丝/扭矩	Screw/Torque(Max)[N.m]	M3/0.5		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	/		
引针尺寸	Pin dimensions [mm]	/		
PCB板孔径	PCB Hole Diameter [mm]	/		

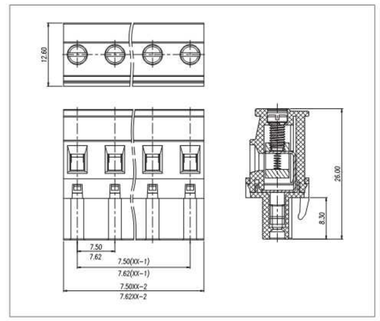




Pitch:5.0/5.08mm

DB2EKBM-5.08

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	15	-	10
接线范围 Wire Range	单芯线 Solid [AWG]	28~12		
	多芯线 Stranded [AWG]	28~12		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	250	320	630
额定电流	Rated Current [A]	12	12	12
额定冲击电压	Impulse withstand voltage [KV]	4	4	4
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	0.2~2.5		
	柔性导线 Flexible[mm²]	0.2~2.5		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Ni plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	5.0,5.08/2~24		
剥线长度	Stripping Length [mm]	7~8		
螺丝/扭矩	Screw/Torque(Max)[N.m]	M3/0.5		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	/		
引针尺寸	Pin dimensions [mm]	/		
PCB板孔径	PCB Hole Diameter [mm]	/		

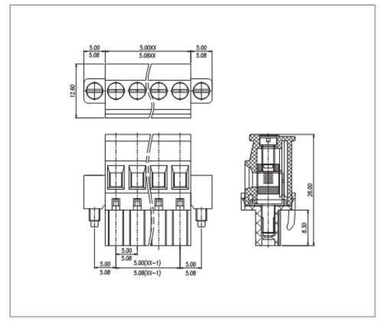




Pitch:7.5/7.62mm

DB2EKBM-7.62

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	15	-	10
接线范围 Wire Range	单芯线 Solid [AWG]	28~12		
	多芯线 Stranded [AWG]	28~12		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	500	630	1000
额定电流	Rated Current [A]	12	12	12
额定冲击电压	Impulse withstand voltage [KV]	6	6	6
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	0.2~2.5		
	柔性导线 Flexible[mm²]	0.2~2.5		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Ni plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	7.5,7.62/2~24		
剥线长度	Stripping Length [mm]	7~8		
螺丝/扭矩	Screw/Torque(Max)[N.m]	M3/0.5		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	/		
引针尺寸	Pin dimensions [mm]	/		
PCB板孔径	PCB Hole Diameter [mm]	/		






Pitch:5.08mm

DB2EKAH-5.08

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	15	-	10
接线范围 Wire Range	单芯线 Solid [AWG]	28~12		
	多芯线 Stranded [AWG]	28~12		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	250	320	630
额定电流	Rated Current [A]	12	12	12
额定冲击电压	Impulse withstand voltage [KV]	4	4	4
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	0.2~2.5		
	柔性导线 Flexible[mm²]	0.2~2.5		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	5.08/2~24		
剥线长度	Stripping Length [mm]	7~8		
螺丝/扭矩	Screw/Torque(Max)[N.m]	M3/0.5		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	/		
引针尺寸	Pin dimensions [mm]	/		
PCB板孔径	PCB Hole Diameter [mm]	/		






Pitch:5.08mm

DB2EKAHM-5.08

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	15	-	10
接线范围 Wire Range	单芯线 Solid [AWG]	28~12		
	多芯线 Stranded [AWG]	28~12		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	250	320	630
额定电流	Rated Current [A]	12	12	12
额定冲击电压	Impulse withstand voltage [KV]	4	4	4
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	0.2~2.5		
	柔性导线 Flexible[mm²]	0.2~2.5		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	5.08/2~24		
剥线长度	Stripping Length [mm]	7~8		
螺丝/扭矩	Screw/Torque(Max)[N.m]	M3/0.5		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	/		
引针尺寸	Pin dimensions [mm]	/		
PCB板孔径	PCB Hole Diameter [mm]	/		






Pitch:5.0/5.08mm

DB2EKC-5.08

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	15	-	10
接线范围 Wire Range	单芯线 Solid [AWG]	28~12		
	多芯线 Stranded [AWG]	28~12		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	250	320	630
额定电流	Rated Current [A]	12	12	12
额定冲击电压	Impulse withstand voltage [KV]	4	4	4
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	0.2~2.5		
	柔性导线 Flexible[mm²]	0.2~2.5		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Ni plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	5.0,5.08/2~24		
剥线长度	Stripping Length [mm]	9-10		
螺丝/扭矩	Screw/Torque(Max)[N.m]	M2.5/0.4		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	/		
引针尺寸	Pin dimensions [mm]	/		
PCB板孔径	PCB Hole Diameter [mm]	/		






Pitch:5.0/5.08mm

DB2EKCM-5.08

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	15	-	10
接线范围 Wire Range	单芯线 Solid [AWG]	28~12		
	多芯线 Stranded [AWG]	28~12		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	250	320	630
额定电流	Rated Current [A]	12	12	12
额定冲击电压	Impulse withstand voltage [KV]	4	4	4
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	0.2~2.5		
	柔性导线 Flexible[mm²]	0.2~2.5		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Ni plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	5.0,5.08/2~24		
剥线长度	Stripping Length [mm]	9-10		
螺丝/扭矩	Screw/Torque(Max)[N.m]	M2.5/0.4		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	/		
引针尺寸	Pin dimensions [mm]	/		
PCB板孔径	PCB Hole Diameter [mm]	/		

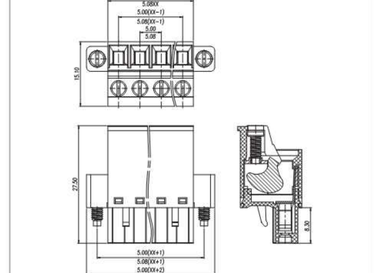




Pitch:5.0/5.08mm

DB2EKDM-5.08

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	10	-	10
接线范围 Wire Range	单芯线 Solid [AWG]	28~12		
	多芯线 Stranded [AWG]	28~12		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	250	320	630
额定电流	Rated Current [A]	12	12	12
额定冲击电压	Impulse withstand voltage [KV]	4	4	4
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	0.2~2.5		
	柔性导线 Flexible[mm²]	0.2~2.5		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	5.0,5.08/2~24		
剥线长度	Stripping Length [mm]	7~8		
螺丝/扭矩	Screw/Torque(Max)[N.m]	/		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	/		
引针尺寸	Pin dimensions [mm]	/		
PCB板孔径	PCB Hole Diameter [mm]	/		

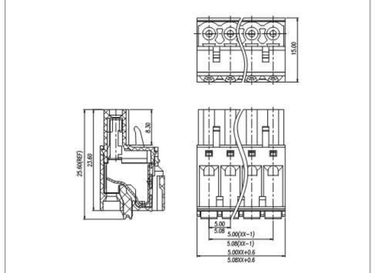




Pitch:5.0/5.08mm

DB2EKDM–5.0/5.08

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	10	-	10
接线范围 Wire Range	单芯线 Solid [AWG]	28~12		
	多芯线 Stranded [AWG]	28~12		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	250	320	630
额定电流	Rated Current [A]	12	12	12
额定冲击电压	Impulse withstand voltage [KV]	4	4	4
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	0.2~2.5		
	柔性导线 Flexible[mm²]	0.2~2.5		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	5.0,5.08/2~24		
剥线长度	Stripping Length [mm]	7~8		
螺丝/扭矩	Screw/Torque(Max)[N.m]	/		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	/		
引针尺寸	Pin dimensions [mm]	/		
PCB板孔径	PCB Hole Diameter [mm]	/		







Pitch:5.0/5.08mm

DB2EKDG–5.0/5.08

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	10	-	10
接线范围 Wire Range	单芯线 Solid [AWG]	28~12		
	多芯线 Stranded [AWG]	28~12		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	250	320	630
额定电流	Rated Current [A]	12	12	12
额定冲击电压	Impulse withstand voltage [KV]	4	4	4
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	0.2~2.5		
	柔性导线 Flexible[mm²]	0.2~2.5		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	5.0,5.08/2~24		
剥线长度	Stripping Length [mm]	7~8		
螺丝/扭矩	Screw/Torque(Max)[N.m]	/		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	/		
引针尺寸	Pin dimensions [mm]	/		
PCB板孔径	PCB Hole Diameter [mm]	/		







Pitch:7.5/7.62mm

DB2EKD–7.5/7.62

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	10	-	10
接线范围 Wire Range	单芯线 Solid [AWG]	28~12		
	多芯线 Stranded [AWG]	28~12		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	400	630	1000
额定电流	Rated Current [A]	12	12	12
额定冲击电压	Impulse withstand voltage [KV]	6	6	6
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	0.2~2.5		
	柔性导线 Flexible[mm²]	0.2~2.5		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	7.5,2~24/7.62,2~16		
剥线长度	Stripping Length [mm]	7-8		
螺丝/扭矩	Screw/Torque(Max)[N.m]	/		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	/		
引针尺寸	Pin dimensions [mm]	/		
PCB板孔径	PCB Hole Diameter [mm]	/		




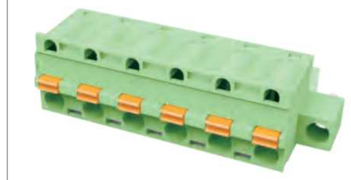

Pitch:7.5/7.62mm

DB2EKDM–7.5/7.62

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	10	-	10
接线范围 Wire Range	单芯线 Solid [AWG]	28~12		
	多芯线 Stranded [AWG]	28~12		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	400	630	1000
额定电流	Rated Current [A]	12	12	12
额定冲击电压	Impulse withstand voltage [KV]	6	6	6
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	0.2~2.5		
	柔性导线 Flexible[mm²]	0.2~2.5		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	7.5,2~24/7.62,2~16		
剥线长度	Stripping Length [mm]	7-8		
螺丝/扭矩	Screw/Torque(Max)[N.m]	/		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	/		
引针尺寸	Pin dimensions [mm]	/		
PCB板孔径	PCB Hole Diameter [mm]	/		

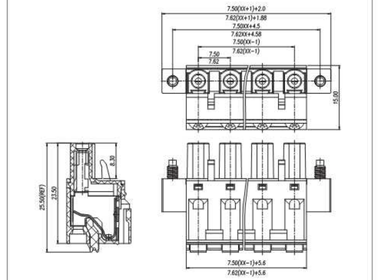




Pitch:7.5/7.62mm

DB2EKDG–7.5/7.62

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	10	-	10
接线范围 Wire Range	单芯线 Solid [AWG]	28~12		
	多芯线 Stranded [AWG]	28~12		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	400	630	1000
额定电流	Rated Current [A]	12	12	12
额定冲击电压	Impulse withstand voltage [KV]	6	6	6
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	0.2~2.5		
	柔性导线 Flexible[mm²]	0.2~2.5		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	7.5,2~24/7.62,2~16		
剥线长度	Stripping Length [mm]	7~8		
螺丝/扭矩	Screw/Torque(Max)[N.m]	/		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	/		
引针尺寸	Pin dimensions [mm]	/		
PCB板孔径	PCB Hole Diameter [mm]	/		

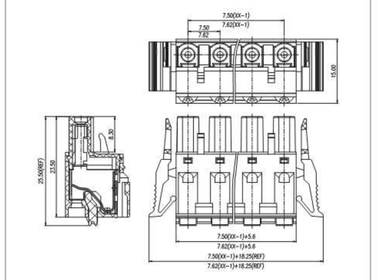




Pitch:5.0/5.08mm

DB2EKDA–5.0/5.08

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	10	-	10
接线范围 Wire Range	单芯线 Solid [AWG]	28~12		
	多芯线 Stranded [AWG]	28~12		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	250	320	630
额定电流	Rated Current [A]	12	12	12
额定冲击电压	Impulse withstand voltage [KV]	4	4	4
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	0.2~2.5		
	柔性导线 Flexible[mm²]	0.2~2.5		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	5.0,5.08/2~24		
剥线长度	Stripping Length [mm]	8~9		
螺丝/扭矩	Screw/Torque(Max)[N.m]	/		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	/		
引针尺寸	Pin dimensions [mm]	/		
PCB板孔径	PCB Hole Diameter [mm]	/		






Pitch:5.0/5.08mm

DB2EKDAM-5.0/5.08

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	10	-	10
接线范围 Wire Range	单芯线 Solid [AWG]	28~12		
	多芯线 Stranded [AWG]	28~12		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	250	320	630
额定电流	Rated Current [A]	12	12	12
额定冲击电压	Impulse withstand voltage [KV]	4	4	4
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	0.2~2.5		
	柔性导线 Flexible[mm²]	0.2~2.5		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	5.0,5.08/2~24		
剥线长度	Stripping Length [mm]	8~9		
螺丝/扭矩	Screw/Torque(Max)[N.m]	/		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	/		
引针尺寸	Pin dimensions [mm]	/		
PCB板孔径	PCB Hole Diameter [mm]	/		






Pitch:5.0/5.08mm

DB2EKDB-5.0/5.08

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	10	-	10
接线范围 Wire Range	单芯线 Solid [AWG]	28~12		
	多芯线 Stranded [AWG]	28~12		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	250	320	630
额定电流	Rated Current [A]	12	12	12
额定冲击电压	Impulse withstand voltage [KV]	4	4	4
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	0.2~2.5		
	柔性导线 Flexible[mm²]	0.2~2.5		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	5.0,5.08/2~24		
剥线长度	Stripping Length [mm]	8~9		
螺丝/扭矩	Screw/Torque(Max)[N.m]	/		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	/		
引针尺寸	Pin dimensions [mm]	/		
PCB板孔径	PCB Hole Diameter [mm]	/		






Pitch:5.0/5.08mm

DB2EKDBM-5.0/5.08

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	10	-	10
接线范围 Wire Range	单芯线 Solid [AWG]	28~12		
	多芯线 Stranded [AWG]	28~12		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	250	320	630
额定电流	Rated Current [A]	12	12	12
额定冲击电压	Impulse withstand voltage [KV]	4	4	4
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	0.2~2.5		
	柔性导线 Flexible[mm²]	0.2~2.5		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	5.0,5.08/2~24		
剥线长度	Stripping Length [mm]	8~9		
螺丝/扭矩	Screw/Torque(Max)[N.m]	/		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	/		
引针尺寸	Pin dimensions [mm]	/		
PCB板孔径	PCB Hole Diameter [mm]	/		






Pitch:5.08mm

DBDB2EKDH-5.08

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	10	-	10
接线范围 Wire Range	单芯线 Solid [AWG]	28~12		
	多芯线 Stranded [AWG]	28~12		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	320	320	630
额定电流	Rated Current [A]	12	12	12
额定冲击电压	Impulse withstand voltage [KV]	4	4	4
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	0.2~2.5		
	柔性导线 Flexible[mm²]	0.2~2.5		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	5.08/2~24		
剥线长度	Stripping Length [mm]	7~8		
螺丝/扭矩	Screw/Torque(Max)[N.m]	/		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	/		
引针尺寸	Pin dimensions [mm]	/		
PCB板孔径	PCB Hole Diameter [mm]	/		






Pitch:5.08mm

DB2EKDHM-5.08

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	10	-	10
接线范围 Wire Range	单芯线 Solid [AWG]	28~12		
	多芯线 Stranded [AWG]	28~12		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	320	320	630
额定电流	Rated Current [A]	12	12	12
额定冲击电压	Impulse withstand voltage [KV]	4	4	4
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	0.2~2.5		
	柔性导线 Flexible[mm²]	0.2~2.5		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	5.08/2~24		
剥线长度	Stripping Length [mm]	7~8		
螺丝/扭矩	Screw/Torque(Max)[N.m]	/		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	/		
引针尺寸	Pin dimensions [mm]	/		
PCB板孔径	PCB Hole Diameter [mm]	/		







Pitch:5.08mm

DB2EKDHG-5.08

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	10	-	10
接线范围 Wire Range	单芯线 Solid [AWG]	28~12		
	多芯线 Stranded [AWG]	28~12		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	320	320	630
额定电流	Rated Current [A]	12	12	12
额定冲击电压	Impulse withstand voltage [KV]	4	4	4
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	0.2~2.5		
	柔性导线 Flexible[mm²]	0.2~2.5		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	5.08/2~24		
剥线长度	Stripping Length [mm]	7~8		
螺丝/扭矩	Screw/Torque(Max)[N.m]	/		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	/		
引针尺寸	Pin dimensions [mm]	/		
PCB板孔径	PCB Hole Diameter [mm]	/		





Pitch:5.0mm

DB2EKDF-5.0

UL/CUL 技术参数
UL/CUL Technical Data

等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	10	-	10
接线范围 Wire Range	单芯线 Solid [AWG]	26~12		
	多芯线 Stranded [AWG]	26~12		
耐电压	Dielectric Voltage-Withstand	1.6KV		

IEC 技术参数
IEC Technical Data


过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	320	320	630
额定电流	Rated Current [A]	12	12	12
额定冲击电压	Impulse withstand voltage [KV]	4	4	4
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	0.2~2.5		
	柔性导线 Flexible[mm²]	0.2~2.5		

材料 Material

绝缘材料	Insulation Material	PA66
阻燃等级	Flame retardant rating	UL94V-0
导体材料	Conductor Material	Copper alloy
导体表面镀层	Plating of conductor surface	Sn plated

一般参数 Other Data

间距/极数	Pitch/Poles [mm]/[P]	5.0/2~24
剥线长度	Stripping Length [mm]	7~8
螺丝/扭矩	Screw/Torque(Max)[N.m]	/
工作温度	Operating temperature[℃]	-40~+105
焊锡温度	Soldering temperature	/
引针尺寸	Pin dimensions [mm]	/
PCB板孔径	PCB Hole Diameter [mm]	/





Pitch:5.0mm

DB2EKDFM-5.0

UL/CUL 技术参数
UL/CUL Technical Data

等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	10	-	10
接线范围 Wire Range	单芯线 Solid [AWG]	26~12		
	多芯线 Stranded [AWG]	26~12		
耐电压	Dielectric Voltage-Withstand	1.6KV		

IEC 技术参数
IEC Technical Data


过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	320	320	630
额定电流	Rated Current [A]	12	12	12
额定冲击电压	Impulse withstand voltage [KV]	4	4	4
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	0.2~2.5		
	柔性导线 Flexible[mm²]	0.2~2.5		

材料 Material

绝缘材料	Insulation Material	PA66
阻燃等级	Flame retardant rating	UL94V-0
导体材料	Conductor Material	Copper alloy
导体表面镀层	Plating of conductor surface	Sn plated

一般参数 Other Data

间距/极数	Pitch/Poles [mm]/[P]	5.0/2~24
剥线长度	Stripping Length [mm]	7~8
螺丝/扭矩	Screw/Torque(Max)[N.m]	/
工作温度	Operating temperature[℃]	-40~+105
焊锡温度	Soldering temperature	/
引针尺寸	Pin dimensions [mm]	/
PCB板孔径	PCB Hole Diameter [mm]	/





Pitch:5.0mm

DB2EKDFG-5.0

UL/CUL 技术参数
UL/CUL Technical Data

等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	10	-	10
接线范围 Wire Range	单芯线 Solid [AWG]	26~12		
	多芯线 Stranded [AWG]	26~12		
耐电压	Dielectric Voltage-Withstand	1.6KV		

IEC 技术参数
IEC Technical Data


过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	320	320	630
额定电流	Rated Current [A]	12	12	12
额定冲击电压	Impulse withstand voltage [KV]	4	4	4
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	0.2~2.5		
	柔性导线 Flexible[mm²]	0.2~2.5		

材料 Material

绝缘材料	Insulation Material	PA66
阻燃等级	Flame retardant rating	UL94V-0
导体材料	Conductor Material	Copper alloy
导体表面镀层	Plating of conductor surface	Sn plated

一般参数 Other Data

间距/极数	Pitch/Poles [mm]/[P]	5.0/2~24
剥线长度	Stripping Length [mm]	7~8
螺丝/扭矩	Screw/Torque(Max)[N.m]	/
工作温度	Operating temperature[℃]	-40~+105
焊锡温度	Soldering temperature	/
引针尺寸	Pin dimensions [mm]	/
PCB板孔径	PCB Hole Diameter [mm]	/

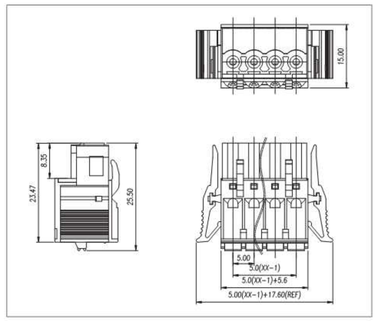



Pitch:5.0/5.08mm

DB2EKF-5.0/5.08

UL/CUL 技术参数
UL/CUL Technical Data

等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	15	-	10
接线范围 Wire Range	单芯线 Solid [AWG]	28~12		
	多芯线 Stranded [AWG]	28~12		
耐电压	Dielectric Voltage-Withstand	1.6KV		

IEC 技术参数
IEC Technical Data


过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	250	320	630
额定电流	Rated Current [A]	12	12	12
额定冲击电压	Impulse withstand voltage [KV]	4	4	4
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	0.2~2.5		
	柔性导线 Flexible[mm²]	0.2~2.5		

材料 Material

绝缘材料	Insulation Material	PA66
阻燃等级	Flame retardant rating	UL94V-0
导体材料	Conductor Material	Copper alloy
导体表面镀层	Plating of conductor surface	Ni plated

一般参数 Other Data

间距/极数	Pitch/Poles [mm]/[P]	5.0,5.08/2~24
剥线长度	Stripping Length [mm]	7~8
螺丝/扭矩	Screw/Torque(Max)[N.m]	M3/0.5
工作温度	Operating temperature[℃]	-40~+105
焊锡温度	Soldering temperature	/
引针尺寸	Pin dimensions [mm]	/
PCB板孔径	PCB Hole Diameter [mm]	/





Pitch:5.0/5.08mm

DB2EKZ-5.0/5.08

UL/CUL 技术参数
UL/CUL Technical Data

等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	15	-	10
接线范围 Wire Range	单芯线 Solid [AWG]	28~12		
	多芯线 Stranded [AWG]	28~12		
耐电压	Dielectric Voltage-Withstand	1.6KV		

IEC 技术参数
IEC Technical Data


过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	250	320	630
额定电流	Rated Current [A]	10	10	10
额定冲击电压	Impulse withstand voltage [KV]	4	4	4
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	0.2~2.5		
	柔性导线 Flexible[mm²]	0.2~2.5		

材料 Material

绝缘材料	Insulation Material	PA66
阻燃等级	Flame retardant rating	UL94V-0
导体材料	Conductor Material	Copper alloy
导体表面镀层	Plating of conductor surface	Ni plated

一般参数 Other Data

间距/极数	Pitch/Poles [mm]/[P]	5.0,5.08/2~24
剥线长度	Stripping Length [mm]	7~8
螺丝/扭矩	Screw/Torque(Max)[N.m]	M3/0.5
工作温度	Operating temperature[℃]	-40~+105
焊锡温度	Soldering temperature	/
引针尺寸	Pin dimensions [mm]	/
PCB板孔径	PCB Hole Diameter [mm]	/





Pitch:5.0/5.08mm

DB2EKZM-5.0/5.08

UL/CUL 技术参数
UL/CUL Technical Data

等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	15	-	10
接线范围 Wire Range	单芯线 Solid [AWG]	28~12		
	多芯线 Stranded [AWG]	28~12		
耐电压	Dielectric Voltage-Withstand	1.6KV		

IEC 技术参数
IEC Technical Data


过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	250	320	630
额定电流	Rated Current [A]	10	10	10
额定冲击电压	Impulse withstand voltage [KV]	4	4	4
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	0.2~2.5		
	柔性导线 Flexible[mm²]	0.2~2.5		

材料 Material

绝缘材料	Insulation Material	PA66
阻燃等级	Flame retardant rating	UL94V-0
导体材料	Conductor Material	Copper alloy
导体表面镀层	Plating of conductor surface	Ni plated

一般参数 Other Data

间距/极数	Pitch/Poles [mm]/[P]	5.0,5.08/2~24
剥线长度	Stripping Length [mm]	7~8
螺丝/扭矩	Screw/Torque(Max)[N.m]	M3/0.5
工作温度	Operating temperature[℃]	-40~+105
焊锡温度	Soldering temperature	/
引针尺寸	Pin dimensions [mm]	/
PCB板孔径	PCB Hole Diameter [mm]	/






Pitch: 5.08mm

DB2EKL–5.08

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	15	-	10
接线范围 Wire Range	单芯线 Solid [AWG]	28~12		
	多芯线 Stranded [AWG]	28~12		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	250	320	630
额定电流	Rated Current [A]	12	12	12
额定冲击电压	Impulse withstand voltage [KV]	4	4	4
导线截面积 Conductor cross section	硬质导线 Solid [mm²]	0.2~1.5		
	柔性导线 Flexible [mm²]	0.2~1.5		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Ni plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	5.08/2~24		
剥线长度	Stripping Length [mm]	7~8		
螺丝/扭矩	Screw/Torque(Max) [N.m]	M3/0.5		
工作温度	Operating temperature [℃]	-40~+105		
焊锡温度	Soldering temperature	/		
引针尺寸	Pin dimensions [mm]	/		
PCB板孔径	PCB Hole Diameter [mm]	/		






Pitch: 5.08mm

DB2EKLM–5.08

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	15	-	10
接线范围 Wire Range	单芯线 Solid [AWG]	28~12		
	多芯线 Stranded [AWG]	28~12		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	250	320	630
额定电流	Rated Current [A]	12	12	12
额定冲击电压	Impulse withstand voltage [KV]	4	4	4
导线截面积 Conductor cross section	硬质导线 Solid [mm²]	0.2~1.5		
	柔性导线 Flexible [mm²]	0.2~1.5		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Ni plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	5.08/2~24		
剥线长度	Stripping Length [mm]	7~8		
螺丝/扭矩	Screw/Torque(Max) [N.m]	M3/0.5		
工作温度	Operating temperature [℃]	-40~+105		
焊锡温度	Soldering temperature	/		
引针尺寸	Pin dimensions [mm]	/		
PCB板孔径	PCB Hole Diameter [mm]	/		






Pitch:5.0mm

DB2EKN–5.0

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	12	-	10
接线范围 Wire Range	单芯线 Solid [AWG]	24~16		
	多芯线 Stranded [AWG]	24~16		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	320	320	630
额定电流	Rated Current [A]	12	12	12
额定冲击电压	Impulse withstand voltage [KV]	4	4	4
导线截面积 Conductor cross section	硬质导线 Solid [mm²]	0.2~1.5		
	柔性导线 Flexible [mm²]	0.2~2.5		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	5.0/2~24		
剥线长度	Stripping Length [mm]	11~12		
螺丝/扭矩	Screw/Torque(Max) [N.m]	/		
工作温度	Operating temperature [℃]	-40~+105		
焊锡温度	Soldering temperature	/		
引针尺寸	Pin dimensions [mm]	/		
PCB板孔径	PCB Hole Diameter [mm]	/		






Pitch:5.0mm

DB2EKNM–5.0

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	12	-	10
接线范围 Wire Range	单芯线 Solid [AWG]	24~16		
	多芯线 Stranded [AWG]	24~16		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	320	320	630
额定电流	Rated Current [A]	12	12	12
额定冲击电压	Impulse withstand voltage [KV]	4	4	4
导线截面积 Conductor cross section	硬质导线 Solid [mm²]	0.2~1.5		
	柔性导线 Flexible [mm²]	0.2~2.5		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	5.0/2~24		
剥线长度	Stripping Length [mm]	11~12		
螺丝/扭矩	Screw/Torque(Max) [N.m]	/		
工作温度	Operating temperature [℃]	-40~+105		
焊锡温度	Soldering temperature	/		
引针尺寸	Pin dimensions [mm]	/		
PCB板孔径	PCB Hole Diameter [mm]	/		







Pitch:5.0mm

DB2EKNG–5.0

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	12	-	10
接线范围 Wire Range	单芯线 Solid [AWG]	24~16		
	多芯线 Stranded [AWG]	24~16		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	320	320	630
额定电流	Rated Current [A]	12	12	12
额定冲击电压	Impulse withstand voltage [KV]	4	4	4
导线截面积 Conductor cross section	硬质导线 Solid [mm²]	0.2~1.5		
	柔性导线 Flexible [mm²]	0.2~2.5		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	5.0/2~24		
剥线长度	Stripping Length [mm]	11~12		
螺丝/扭矩	Screw/Torque(Max) [N.m]	/		
工作温度	Operating temperature [℃]	-40~+105		
焊锡温度	Soldering temperature	/		
引针尺寸	Pin dimensions [mm]	/		
PCB板孔径	PCB Hole Diameter [mm]	/		







Pitch:5.0/5.08mm

DB2EB–5.0/5.08

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	15	-	10
接线范围 Wire Range	单芯线 Solid [AWG]	/		
	多芯线 Stranded [AWG]	/		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	320	320	630
额定电流	Rated Current [A]	12	12	12
额定冲击电压	Impulse withstand voltage [KV]	4	4	4
导线截面积 Conductor cross section	硬质导线 Solid [mm²]	/		
	柔性导线 Flexible [mm²]	/		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	5.0,5.08/2~24		
剥线长度	Stripping Length [mm]	/		
螺丝/扭矩	Screw/Torque(Max) [N.m]	/		
工作温度	Operating temperature [℃]	-40~+105		
焊锡温度	Soldering temperature	250℃ /5S		
引针尺寸	Pin dimensions [mm]	0.4*1.1		
PCB板孔径	PCB Hole Diameter [mm]	∅1.4		






Pitch:5.0/5.08mm

DB2EBM-5.0/5.08

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	15	-	10
接线范围 Wire Range	单芯线 Solid [AWG]	/		
	多芯线 Stranded [AWG]	/		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	320	320	630
额定电流	Rated Current [A]	12	12	12
额定冲击电压	Impulse withstand voltage [KV]	4	4	4
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	/		
	柔性导线 Flexible[mm²]	/		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	5.0,5.08/2~24		
剥线长度	Stripping Length [mm]	/		
螺丝/扭矩	Screw/Torque(Max)[N.m]	/		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	250℃ /5S		
引针尺寸	Pin dimensions [mm]	0.4*1.1		
PCB板孔径	PCB Hole Diameter [mm]	∅1.4		

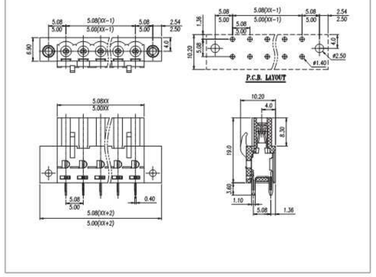




Pitch:5.0/5.08mm

DB2EA-5.0/5.08

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	15	-	10
接线范围 Wire Range	单芯线 Solid [AWG]	/		
	多芯线 Stranded [AWG]	/		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	320	320	630
额定电流	Rated Current [A]	12	12	12
额定冲击电压	Impulse withstand voltage [KV]	4	4	4
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	/		
	柔性导线 Flexible[mm²]	/		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	5.0,5.08/2~24		
剥线长度	Stripping Length [mm]	/		
螺丝/扭矩	Screw/Torque(Max)[N.m]	/		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	250℃ /5S		
引针尺寸	Pin dimensions [mm]	0.4*1.1		
PCB板孔径	PCB Hole Diameter [mm]	∅1.4		







Pitch:5.0/5.08mm

DB2EAM-5.0/5.08

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	15	-	10
接线范围 Wire Range	单芯线 Solid [AWG]	/		
	多芯线 Stranded [AWG]	/		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	320	320	630
额定电流	Rated Current [A]	12	12	12
额定冲击电压	Impulse withstand voltage [KV]	4	4	4
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	/		
	柔性导线 Flexible[mm²]	/		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	5.0,5.08/2~24		
剥线长度	Stripping Length [mm]	/		
螺丝/扭矩	Screw/Torque(Max)[N.m]	/		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	250℃ /5S		
引针尺寸	Pin dimensions [mm]	0.4*1.1		
PCB板孔径	PCB Hole Diameter [mm]	∅1.4		

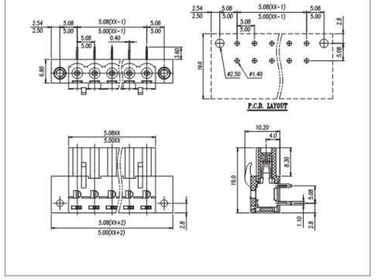




Pitch:7.62mm

DB2EB-7.62

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	15	-	10
接线范围 Wire Range	单芯线 Solid [AWG]	/		
	多芯线 Stranded [AWG]	/		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	500	630	1000
额定电流	Rated Current [A]	12	12	12
额定冲击电压	Impulse withstand voltage [KV]	6	6	6
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	/		
	柔性导线 Flexible[mm²]	/		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	7.62/2~16		
剥线长度	Stripping Length [mm]	/		
螺丝/扭矩	Screw/Torque(Max)[N.m]	/		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	250℃ /5S		
引针尺寸	Pin dimensions [mm]	0.4*1.1		
PCB板孔径	PCB Hole Diameter [mm]	∅1.4		






Pitch:7.62mm

DB2EBM-7.62

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	15	-	10
接线范围 Wire Range	单芯线 Solid [AWG]	/		
	多芯线 Stranded [AWG]	/		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	500	630	1000
额定电流	Rated Current [A]	12	12	12
额定冲击电压	Impulse withstand voltage [KV]	6	6	6
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	/		
	柔性导线 Flexible[mm²]	/		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	7.62/2~16		
剥线长度	Stripping Length [mm]	/		
螺丝/扭矩	Screw/Torque(Max)[N.m]	/		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	250℃ /5S		
引针尺寸	Pin dimensions [mm]	0.4*1.1		
PCB板孔径	PCB Hole Diameter [mm]	∅1.4		

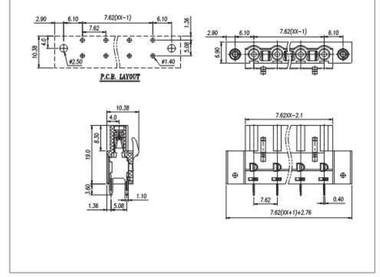




Pitch:7.62mm

DB2EA-7.62

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	15	-	10
接线范围 Wire Range	单芯线 Solid [AWG]	/		
	多芯线 Stranded [AWG]	/		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	500	630	1000
额定电流	Rated Current [A]	12	12	12
额定冲击电压	Impulse withstand voltage [KV]	6	6	6
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	/		
	柔性导线 Flexible[mm²]	/		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	7.62/2~16		
剥线长度	Stripping Length [mm]	/		
螺丝/扭矩	Screw/Torque(Max)[N.m]	/		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	250℃ /5S		
引针尺寸	Pin dimensions [mm]	0.4*1.1		
PCB板孔径	PCB Hole Diameter [mm]	∅1.4		

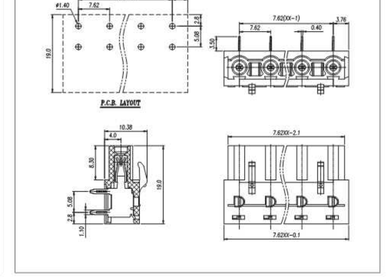




Pitch:7.62mm

DB2EAM-7.62

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	15	-	10
接线范围 Wire Range	单芯线 Solid [AWG]	/		
	多芯线 Stranded [AWG]	/		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	500	630	1000
额定电流	Rated Current [A]	12	12	12
额定冲击电压	Impulse withstand voltage [KV]	6	6	6
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	/		
	柔性导线 Flexible[mm²]	/		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	7.62/2~16		
剥线长度	Stripping Length [mm]	/		
螺丝/扭矩	Screw/Torque(Max)[N.m]	/		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	250℃ /5S		
引针尺寸	Pin dimensions [mm]	0.4*1.1		
PCB板孔径	PCB Hole Diameter [mm]	∅1.4		

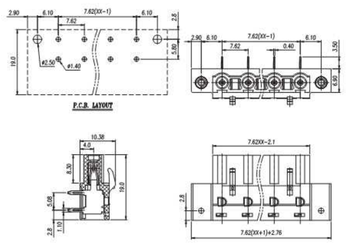




Pitch:5.0/5.08mm

DB2EV-5.08

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	15	-	10
接线范围 Wire Range	单芯线 Solid [AWG]	/		
	多芯线 Stranded [AWG]	/		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	250	320	400
额定电流	Rated Current [A]	10	10	10
额定冲击电压	Impulse withstand voltage [KV]	4	4	4
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	/		
	柔性导线 Flexible[mm²]	/		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	5.0,5.08/2~24		
剥线长度	Stripping Length [mm]	/		
螺丝/扭矩	Screw/Torque(Max)[N.m]	/		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	250℃ /5S		
引针尺寸	Pin dimensions [mm]	1.0*1.0		
PCB板孔径	PCB Hole Diameter [mm]	∅1.7		






Pitch:7.5/7.62mm

DB2EV-7.62

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	15	-	10
接线范围 Wire Range	单芯线 Solid [AWG]	/		
	多芯线 Stranded [AWG]	/		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	400	630	630
额定电流	Rated Current [A]	10	10	10
额定冲击电压	Impulse withstand voltage [KV]	6	6	6
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	/		
	柔性导线 Flexible[mm²]	/		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	7.5,7.62/2~24		
剥线长度	Stripping Length [mm]	/		
螺丝/扭矩	Screw/Torque(Max)[N.m]	/		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	250℃ /5S		
引针尺寸	Pin dimensions [mm]	1.0*1.0		
PCB板孔径	PCB Hole Diameter [mm]	∅1.7		

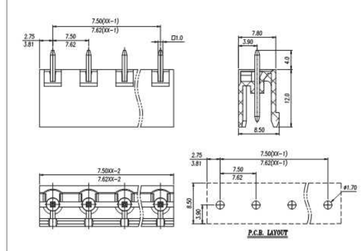




Pitch:10.0/10.16mm

DB2EV-10.16

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	600	-	600
额定电流	Rated Current [A]	15	-	5
接线范围 Wire Range	单芯线 Solid [AWG]	/		
	多芯线 Stranded [AWG]	/		
耐电压	Dielectric Voltage-Withstand	2.2KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	630	1000	1000
额定电流	Rated Current [A]	10	10	10
额定冲击电压	Impulse withstand voltage [KV]	6	6	6
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	/		
	柔性导线 Flexible[mm²]	/		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	10.0,10.16/2~12		
剥线长度	Stripping Length [mm]	/		
螺丝/扭矩	Screw/Torque(Max)[N.m]	/		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	250℃ /5S		
引针尺寸	Pin dimensions [mm]	1.0*1.0		
PCB板孔径	PCB Hole Diameter [mm]	∅1.7		






Pitch:5.0/5.08mm

DB2ER-5.08

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	15	-	10
接线范围 Wire Range	单芯线 Solid [AWG]	/		
	多芯线 Stranded [AWG]	/		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	250	320	400
额定电流	Rated Current [A]	10	10	10
额定冲击电压	Impulse withstand voltage [KV]	4	4	4
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	/		
	柔性导线 Flexible[mm²]	/		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	5.0,5.08/2~24		
剥线长度	Stripping Length [mm]	/		
螺丝/扭矩	Screw/Torque(Max)[N.m]	/		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	250℃ /5S		
引针尺寸	Pin dimensions [mm]	1.0*1.0		
PCB板孔径	PCB Hole Diameter [mm]	∅1.7		






Pitch:7.5/7.62mm

DB2ER-7.62

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	15	-	10
接线范围 Wire Range	单芯线 Solid [AWG]	/		
	多芯线 Stranded [AWG]	/		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	400	630	630
额定电流	Rated Current [A]	10	10	10
额定冲击电压	Impulse withstand voltage [KV]	6	6	6
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	/		
	柔性导线 Flexible[mm²]	/		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	7.5,7.62/2~24		
剥线长度	Stripping Length [mm]	/		
螺丝/扭矩	Screw/Torque(Max)[N.m]	/		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	250℃ /5S		
引针尺寸	Pin dimensions [mm]	1.0*1.0		
PCB板孔径	PCB Hole Diameter [mm]	∅1.7		

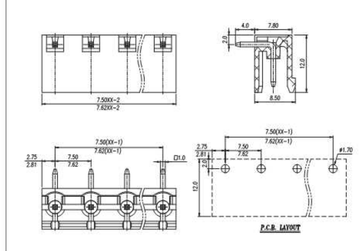



Pitch:10.0/10.16mm


DB2ER-10.16

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	600	-	600
额定电流	Rated Current [A]	15	-	5
接线范围 Wire Range	单芯线 Solid [AWG]	/		
	多芯线 Stranded [AWG]	/		
耐电压	Dielectric Voltage-Withstand	2.2KV		

IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	630	1000	1000
额定电流	Rated Current [A]	10	10	10
额定冲击电压	Impulse withstand voltage [KV]	6	6	6
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	/		
	柔性导线 Flexible[mm²]	/		

材料 Material		
绝缘材料	Insulation Material	PA66
阻燃等级	Flame retardant rating	UL94V-0
导体材料	Conductor Material	Copper alloy
导体表面镀层	Plating of conductor surface	Sn plated

一般参数 Other Data		
间距/极数	Pitch/Poles [mm]/[P]	10.0,10.16/2~12
剥线长度	Stripping Length [mm]	/
螺丝/扭矩	Screw/Torque(Max)[N.m]	/
工作温度	Operating temperature[℃]	-40~+105
焊锡温度	Soldering temperature	250℃ /5S
引针尺寸	Pin dimensions [mm]	1.0*1.0
PCB板孔径	PCB Hole Diameter [mm]	∅1.7





Pitch:5.0/5.08mm


DB2EVC-5.08

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	15	-	10
接线范围 Wire Range	单芯线 Solid [AWG]	/		
	多芯线 Stranded [AWG]	/		
耐电压	Dielectric Voltage-Withstand	1.6KV		

IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	250	320	400
额定电流	Rated Current [A]	10	10	10
额定冲击电压	Impulse withstand voltage [KV]	4	4	4
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	/		
	柔性导线 Flexible[mm²]	/		

材料 Material		
绝缘材料	Insulation Material	PA66
阻燃等级	Flame retardant rating	UL94V-0
导体材料	Conductor Material	Copper alloy
导体表面镀层	Plating of conductor surface	Sn plated

一般参数 Other Data		
间距/极数	Pitch/Poles [mm]/[P]	5.0,5.08/2~24
剥线长度	Stripping Length [mm]	/
螺丝/扭矩	Screw/Torque(Max)[N.m]	/
工作温度	Operating temperature[℃]	-40~+105
焊锡温度	Soldering temperature	250℃ /5S
引针尺寸	Pin dimensions [mm]	1.0*1.0
PCB板孔径	PCB Hole Diameter [mm]	∅1.7





Pitch:7.5/7.62mm


DB2EVC-7.62

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	15	-	10
接线范围 Wire Range	单芯线 Solid [AWG]	/		
	多芯线 Stranded [AWG]	/		
耐电压	Dielectric Voltage-Withstand	1.6KV		

IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	400	630	630
额定电流	Rated Current [A]	10	10	10
额定冲击电压	Impulse withstand voltage [KV]	6	6	6
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	/		
	柔性导线 Flexible[mm²]	/		

材料 Material		
绝缘材料	Insulation Material	PA66
阻燃等级	Flame retardant rating	UL94V-0
导体材料	Conductor Material	Copper alloy
导体表面镀层	Plating of conductor surface	Sn plated

一般参数 Other Data		
间距/极数	Pitch/Poles [mm]/[P]	7.5,7.62/2~24
剥线长度	Stripping Length [mm]	/
螺丝/扭矩	Screw/Torque(Max)[N.m]	/
工作温度	Operating temperature[℃]	-40~+105
焊锡温度	Soldering temperature	250℃ /5S
引针尺寸	Pin dimensions [mm]	1.0*1.0
PCB板孔径	PCB Hole Diameter [mm]	∅1.7

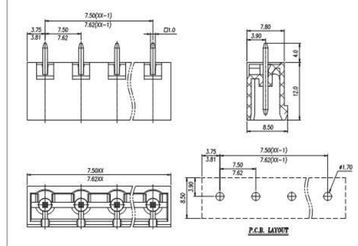



Pitch:10.0/10.16mm


DB2EVC-10.16

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	600	-	600
额定电流	Rated Current [A]	15	-	5
接线范围 Wire Range	单芯线 Solid [AWG]	/		
	多芯线 Stranded [AWG]	/		
耐电压	Dielectric Voltage-Withstand	2.2KV		

IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	630	1000	1000
额定电流	Rated Current [A]	10	10	10
额定冲击电压	Impulse withstand voltage [KV]	6	6	6
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	/		
	柔性导线 Flexible[mm²]	/		

材料 Material		
绝缘材料	Insulation Material	PA66
阻燃等级	Flame retardant rating	UL94V-0
导体材料	Conductor Material	Copper alloy
导体表面镀层	Plating of conductor surface	Sn plated

一般参数 Other Data		
间距/极数	Pitch/Poles [mm]/[P]	10.0,10.16/2~12
剥线长度	Stripping Length [mm]	/
螺丝/扭矩	Screw/Torque(Max)[N.m]	/
工作温度	Operating temperature[℃]	-40~+105
焊锡温度	Soldering temperature	250℃ /5S
引针尺寸	Pin dimensions [mm]	1.0*1.0
PCB板孔径	PCB Hole Diameter [mm]	∅1.7

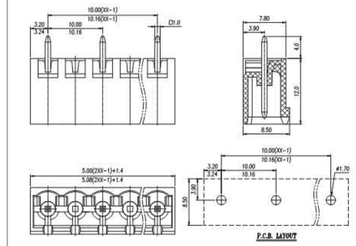



Pitch:5.0/5.08mm


DB2ERC-5.08

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	15	-	10
接线范围 Wire Range	单芯线 Solid [AWG]	/		
	多芯线 Stranded [AWG]	/		
耐电压	Dielectric Voltage-Withstand	1.6KV		

IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	250	320	400
额定电流	Rated Current [A]	10	10	10
额定冲击电压	Impulse withstand voltage [KV]	4	4	4
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	/		
	柔性导线 Flexible[mm²]	/		

材料 Material		
绝缘材料	Insulation Material	PA66
阻燃等级	Flame retardant rating	UL94V-0
导体材料	Conductor Material	Copper alloy
导体表面镀层	Plating of conductor surface	Sn plated

一般参数 Other Data		
间距/极数	Pitch/Poles [mm]/[P]	5.0,5.08/2~24
剥线长度	Stripping Length [mm]	/
螺丝/扭矩	Screw/Torque(Max)[N.m]	/
工作温度	Operating temperature[℃]	-40~+105
焊锡温度	Soldering temperature	250℃ /5S
引针尺寸	Pin dimensions [mm]	1.0*1.0
PCB板孔径	PCB Hole Diameter [mm]	∅1.7

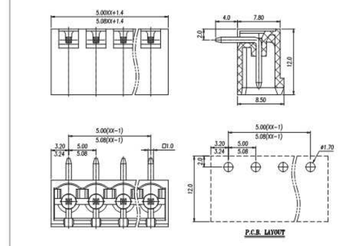



Pitch:7.5/7.62mm


DB2ERC-7.62

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	15	-	10
接线范围 Wire Range	单芯线 Solid [AWG]	/		
	多芯线 Stranded [AWG]	/		
耐电压	Dielectric Voltage-Withstand	1.6KV		

IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	400	630	630
额定电流	Rated Current [A]	10	10	10
额定冲击电压	Impulse withstand voltage [KV]	6	6	6
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	/		
	柔性导线 Flexible[mm²]	/		

材料 Material		
绝缘材料	Insulation Material	PA66
阻燃等级	Flame retardant rating	UL94V-0
导体材料	Conductor Material	Copper alloy
导体表面镀层	Plating of conductor surface	Sn plated

一般参数 Other Data		
间距/极数	Pitch/Poles [mm]/[P]	7.5,7.62/2~24
剥线长度	Stripping Length [mm]	/
螺丝/扭矩	Screw/Torque(Max)[N.m]	/
工作温度	Operating temperature[℃]	-40~+105
焊锡温度	Soldering temperature	250℃ /5S
引针尺寸	Pin dimensions [mm]	1.0*1.0
PCB板孔径	PCB Hole Diameter [mm]	∅1.7

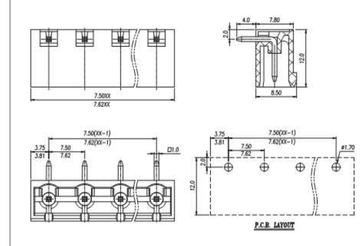




Pitch:10.0/10.16mm

DB2ERC-10.16

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	600	-	600
额定电流	Rated Current [A]	15	-	5
接线范围 Wire Range	单芯线 Solid [AWG]	/		
	多芯线 Stranded [AWG]	/		
耐电压	Dielectric Voltage-Withstand	2.2KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	630	1000	1000
额定电流	Rated Current [A]	10	10	10
额定冲击电压	Impulse withstand voltage [KV]	6	6	6
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	/		
	柔性导线 Flexible[mm²]	/		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	10.0,10.16/2~12		
剥线长度	Stripping Length [mm]	/		
螺丝/扭矩	Screw/Torque(Max)[N.m]	/		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	250℃ /5S		
引针尺寸	Pin dimensions [mm]	1.0*1.0		
PCB板孔径	PCB Hole Diameter [mm]	∅1.7		






Pitch:5.0/5.08mm

DB2EVM-5.08

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	15	-	10
接线范围 Wire Range	单芯线 Solid [AWG]	/		
	多芯线 Stranded [AWG]	/		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	250	320	400
额定电流	Rated Current [A]	10	10	10
额定冲击电压	Impulse withstand voltage [KV]	4	4	4
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	/		
	柔性导线 Flexible[mm²]	/		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	5.0,5.08/2~24		
剥线长度	Stripping Length [mm]	/		
螺丝/扭矩	Screw/Torque(Max)[N.m]	/		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	250℃ /5S		
引针尺寸	Pin dimensions [mm]	1.0*1.0		
PCB板孔径	PCB Hole Diameter [mm]	∅1.7		

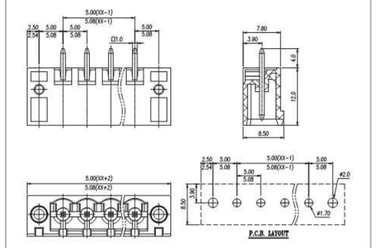




Pitch:7.5/7.62mm

DB2EVM-7.62

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	15	-	10
接线范围 Wire Range	单芯线 Solid [AWG]	/		
	多芯线 Stranded [AWG]	/		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	400	630	630
额定电流	Rated Current [A]	10	10	10
额定冲击电压	Impulse withstand voltage [KV]	6	6	6
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	/		
	柔性导线 Flexible[mm²]	/		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	7.5,7.62/2~24		
剥线长度	Stripping Length [mm]	/		
螺丝/扭矩	Screw/Torque(Max)[N.m]	/		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	250℃ /5S		
引针尺寸	Pin dimensions [mm]	1.0*1.0		
PCB板孔径	PCB Hole Diameter [mm]	∅1.7		






Pitch:10.0/10.16mm

DB2EVM-10.16

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	600	-	600
额定电流	Rated Current [A]	15	-	5
接线范围 Wire Range	单芯线 Solid [AWG]	/		
	多芯线 Stranded [AWG]	/		
耐电压	Dielectric Voltage-Withstand	2.2KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	630	1000	1000
额定电流	Rated Current [A]	10	10	10
额定冲击电压	Impulse withstand voltage [KV]	6	6	6
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	/		
	柔性导线 Flexible[mm²]	/		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	10.0,10.16/2~12		
剥线长度	Stripping Length [mm]	/		
螺丝/扭矩	Screw/Torque(Max)[N.m]	/		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	250℃ /5S		
引针尺寸	Pin dimensions [mm]	1.0*1.0		
PCB板孔径	PCB Hole Diameter [mm]	∅1.7		






Pitch:5.0/5.08mm

DB2ERM-5.08

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	15	-	10
接线范围 Wire Range	单芯线 Solid [AWG]	/		
	多芯线 Stranded [AWG]	/		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	250	320	400
额定电流	Rated Current [A]	10	10	10
额定冲击电压	Impulse withstand voltage [KV]	4	4	4
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	/		
	柔性导线 Flexible[mm²]	/		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	5.0,5.08/2~24		
剥线长度	Stripping Length [mm]	/		
螺丝/扭矩	Screw/Torque(Max)[N.m]	/		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	250℃ /5S		
引针尺寸	Pin dimensions [mm]	1.0*1.0		
PCB板孔径	PCB Hole Diameter [mm]	∅1.7		






Pitch:7.5/7.62mm

DB2ERM-7.62

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	15	-	10
接线范围 Wire Range	单芯线 Solid [AWG]	/		
	多芯线 Stranded [AWG]	/		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	400	630	630
额定电流	Rated Current [A]	10	10	10
额定冲击电压	Impulse withstand voltage [KV]	6	6	6
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	/		
	柔性导线 Flexible[mm²]	/		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	7.5,7.62/2~24		
剥线长度	Stripping Length [mm]	/		
螺丝/扭矩	Screw/Torque(Max)[N.m]	/		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	250℃ /5S		
引针尺寸	Pin dimensions [mm]	1.0*1.0		
PCB板孔径	PCB Hole Diameter [mm]	∅1.7		

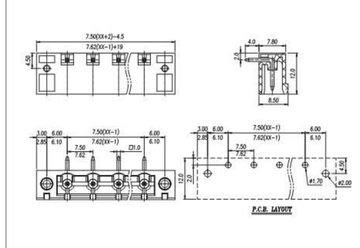



Pitch:10.0/10.16mm

DB2ERM-10.16

UL/CUL 技术参数 UL/CUL Technical Data

等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	600	-	600
额定电流	Rated Current [A]	15	-	5
接线范围 Wire Range	单芯线 Solid [AWG]	/		
	多芯线 Stranded [AWG]	/		
耐电压	Dielectric Voltage-Withstand	2.2KV		

IEC 技术参数 IEC Technical Data


过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	630	1000	1000
额定电流	Rated Current [A]	10	10	10
额定冲击电压	Impulse withstand voltage [KV]	6	6	6
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	/		
	柔性导线 Flexible[mm²]	/		


材料 Material

绝缘材料	Insulation Material	PA66
阻燃等级	Flame retardant rating	UL94V-0
导体材料	Conductor Material	Copper alloy
导体表面镀层	Plating of conductor surface	Sn plated

一般参数 Other Data

间距/极数	Pitch/Poles [mm]/[P]	10.0,10.16/2~12
剥线长度	Stripping Length [mm]	/
螺丝/扭矩	Screw/Torque(Max)[N.m]	/
工作温度	Operating temperature[℃]	-40~+105
焊锡温度	Soldering temperature	250℃ /5S
引针尺寸	Pin dimensions [mm]	1.0*1.0
PCB板孔径	PCB Hole Diameter [mm]	∅1.7





Pitch:5.0/5.08mm

DB2ERF-5.08

UL/CUL 技术参数 UL/CUL Technical Data

等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	15	-	10
接线范围 Wire Range	单芯线 Solid [AWG]	/		
	多芯线 Stranded [AWG]	/		
耐电压	Dielectric Voltage-Withstand	1.6KV		

IEC 技术参数 IEC Technical Data


过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	250	320	400
额定电流	Rated Current [A]	10	10	10
额定冲击电压	Impulse withstand voltage [KV]	4	4	4
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	/		
	柔性导线 Flexible[mm²]	/		

材料 Material

绝缘材料	Insulation Material	PA66
阻燃等级	Flame retardant rating	UL94V-0
导体材料	Conductor Material	Copper alloy
导体表面镀层	Plating of conductor surface	Sn plated

一般参数 Other Data

间距/极数	Pitch/Poles [mm]/[P]	5.0,5.08/2~24
剥线长度	Stripping Length [mm]	/
螺丝/扭矩	Screw/Torque(Max)[N.m]	/
工作温度	Operating temperature[℃]	-40~+105
焊锡温度	Soldering temperature	250℃ /5S
引针尺寸	Pin dimensions [mm]	1.0*1.0
PCB板孔径	PCB Hole Diameter [mm]	∅1.7





Pitch:5.0/5.08mm

DB2ERCF-5.08

UL/CUL 技术参数 UL/CUL Technical Data

等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	15	-	10
接线范围 Wire Range	单芯线 Solid [AWG]	/		
	多芯线 Stranded [AWG]	/		
耐电压	Dielectric Voltage-Withstand	1.6KV		

IEC 技术参数 IEC Technical Data


过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	250	320	400
额定电流	Rated Current [A]	10	10	10
额定冲击电压	Impulse withstand voltage [KV]	4	4	4
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	/		
	柔性导线 Flexible[mm²]	/		


材料 Material

绝缘材料	Insulation Material	PA66
阻燃等级	Flame retardant rating	UL94V-0
导体材料	Conductor Material	Copper alloy
导体表面镀层	Plating of conductor surface	Sn plated

一般参数 Other Data

间距/极数	Pitch/Poles [mm]/[P]	5.0,5.08/2~24
剥线长度	Stripping Length [mm]	/
螺丝/扭矩	Screw/Torque(Max)[N.m]	/
工作温度	Operating temperature[℃]	-40~+105
焊锡温度	Soldering temperature	250℃ /5S
引针尺寸	Pin dimensions [mm]	1.0*1.0
PCB板孔径	PCB Hole Diameter [mm]	∅1.7





Pitch:5.0/5.08mm

DB2ERFM-5.08

UL/CUL 技术参数 UL/CUL Technical Data

等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	15	-	10
接线范围 Wire Range	单芯线 Solid [AWG]	/		
	多芯线 Stranded [AWG]	/		
耐电压	Dielectric Voltage-Withstand	1.6KV		

IEC 技术参数 IEC Technical Data


过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	250	320	400
额定电流	Rated Current [A]	10	10	10
额定冲击电压	Impulse withstand voltage [KV]	4	4	4
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	/		
	柔性导线 Flexible[mm²]	/		

材料 Material

绝缘材料	Insulation Material	PA66
阻燃等级	Flame retardant rating	UL94V-0
导体材料	Conductor Material	Copper alloy
导体表面镀层	Plating of conductor surface	Sn plated

一般参数 Other Data

间距/极数	Pitch/Poles [mm]/[P]	5.0,5.08/2~24
剥线长度	Stripping Length [mm]	/
螺丝/扭矩	Screw/Torque(Max)[N.m]	/
工作温度	Operating temperature[℃]	-40~+105
焊锡温度	Soldering temperature	250℃ /5S
引针尺寸	Pin dimensions [mm]	1.0*1.0
PCB板孔径	PCB Hole Diameter [mm]	∅1.7

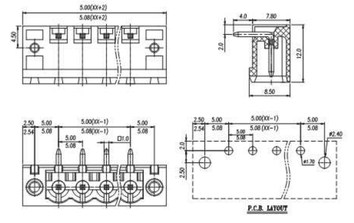



Pitch:5.08mm

DBEVG-5.08

UL/CUL 技术参数 UL/CUL Technical Data

等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	15	-	10
接线范围 Wire Range	单芯线 Solid [AWG]	/		
	多芯线 Stranded [AWG]	/		
耐电压	Dielectric Voltage-Withstand	1.6KV		

IEC 技术参数 IEC Technical Data


过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	250	320	400
额定电流	Rated Current [A]	12	12	12
额定冲击电压	Impulse withstand voltage [KV]	4	4	4
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	/		
	柔性导线 Flexible[mm²]	/		

材料 Material

绝缘材料	Insulation Material	PA66
阻燃等级	Flame retardant rating	UL94V-0
导体材料	Conductor Material	Copper alloy
导体表面镀层	Plating of conductor surface	Sn plated

一般参数 Other Data

间距/极数	Pitch/Poles [mm]/[P]	5.08/2~24
剥线长度	Stripping Length [mm]	/
螺丝/扭矩	Screw/Torque(Max)[N.m]	/
工作温度	Operating temperature[℃]	-40~+105
焊锡温度	Soldering temperature	250℃ /5S
引针尺寸	Pin dimensions [mm]	1.0*1.0
PCB板孔径	PCB Hole Diameter [mm]	∅1.7

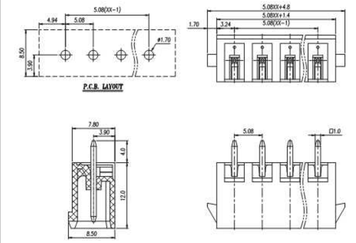



Pitch:5.08mm

DB2ERG-5.08

UL/CUL 技术参数 UL/CUL Technical Data

等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	15	-	10
接线范围 Wire Range	单芯线 Solid [AWG]	/		
	多芯线 Stranded [AWG]	/		
耐电压	Dielectric Voltage-Withstand	1.6KV		

IEC 技术参数 IEC Technical Data


过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	250	320	400
额定电流	Rated Current [A]	12	12	12
额定冲击电压	Impulse withstand voltage [KV]	4	4	4
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	/		
	柔性导线 Flexible[mm²]	/		

材料 Material

绝缘材料	Insulation Material	PA66
阻燃等级	Flame retardant rating	UL94V-0
导体材料	Conductor Material	Copper alloy
导体表面镀层	Plating of conductor surface	Sn plated

一般参数 Other Data

间距/极数	Pitch/Poles [mm]/[P]	5.08/2~24
剥线长度	Stripping Length [mm]	/
螺丝/扭矩	Screw/Torque(Max)[N.m]	/
工作温度	Operating temperature[℃]	-40~+105
焊锡温度	Soldering temperature	250℃ /5S
引针尺寸	Pin dimensions [mm]	1.0*1.0
PCB板孔径	PCB Hole Diameter [mm]	∅1.7

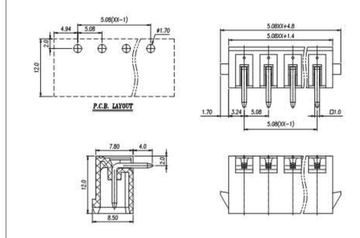



Pitch:5.08mm

DB2EV-THT-5.08

UL/CUL 技术参数
UL/CUL Technical Data

等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	15	-	10
接线范围 Wire Range	单芯线 Solid [AWG]	/		
	多芯线 Stranded [AWG]	/		
耐电压	Dielectric Voltage-Withstand	1.6KV		

IEC 技术参数
IEC Technical Data


过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	250	320	400
额定电流	Rated Current [A]	12	12	12
额定冲击电压	Impulse withstand voltage [KV]	4	4	4
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	/		
	柔性导线 Flexible[mm²]	/		

材料 Material

绝缘材料	Insulation Material	LCP
阻燃等级	Flame retardant rating	UL94V-0
导体材料	Conductor Material	Copper alloy
导体表面镀层	Plating of conductor surface	Sn plated

一般参数 Other Data

间距/极数	Pitch/Poles [mm]/[P]	5.08/2~24
剥线长度	Stripping Length [mm]	/
螺丝/扭矩	Screw/Torque(Max)[N.m]	/
工作温度	Operating temperature[℃]	-40~+130
焊锡温度	Soldering temperature	285℃ /10S
引针尺寸	Pin dimensions [mm]	1.0*1.0
PCB板孔径	PCB Hole Diameter [mm]	∅1.7





Pitch:5.08mm

DB2EVC-THT-5.08

UL/CUL 技术参数
UL/CUL Technical Data

等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	15	-	10
接线范围 Wire Range	单芯线 Solid [AWG]	/		
	多芯线 Stranded [AWG]	/		
耐电压	Dielectric Voltage-Withstand	1.6KV		

IEC 技术参数
IEC Technical Data


过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	250	320	400
额定电流	Rated Current [A]	12	12	12
额定冲击电压	Impulse withstand voltage [KV]	4	4	4
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	/		
	柔性导线 Flexible[mm²]	/		

材料 Material

绝缘材料	Insulation Material	LCP
阻燃等级	Flame retardant rating	UL94V-0
导体材料	Conductor Material	Copper alloy
导体表面镀层	Plating of conductor surface	Sn plated

一般参数 Other Data

间距/极数	Pitch/Poles [mm]/[P]	5.08/2~24
剥线长度	Stripping Length [mm]	/
螺丝/扭矩	Screw/Torque(Max)[N.m]	/
工作温度	Operating temperature[℃]	-40~+130
焊锡温度	Soldering temperature	285℃ /10S
引针尺寸	Pin dimensions [mm]	1.0*1.0
PCB板孔径	PCB Hole Diameter [mm]	∅1.7





Pitch:5.08mm

DB2EVM-THT-5.08

UL/CUL 技术参数
UL/CUL Technical Data

等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	15	-	10
接线范围 Wire Range	单芯线 Solid [AWG]	/		
	多芯线 Stranded [AWG]	/		
耐电压	Dielectric Voltage-Withstand	1.6KV		

IEC 技术参数
IEC Technical Data


过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	250	320	400
额定电流	Rated Current [A]	12	12	12
额定冲击电压	Impulse withstand voltage [KV]	4	4	4
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	/		
	柔性导线 Flexible[mm²]	/		

材料 Material

绝缘材料	Insulation Material	LCP
阻燃等级	Flame retardant rating	UL94V-0
导体材料	Conductor Material	Copper alloy
导体表面镀层	Plating of conductor surface	Sn plated

一般参数 Other Data

间距/极数	Pitch/Poles [mm]/[P]	5.08/2~24
剥线长度	Stripping Length [mm]	/
螺丝/扭矩	Screw/Torque(Max)[N.m]	/
工作温度	Operating temperature[℃]	-40~+130
焊锡温度	Soldering temperature	285℃ /10S
引针尺寸	Pin dimensions [mm]	1.0*1.0
PCB板孔径	PCB Hole Diameter [mm]	∅1.7





Pitch:5.08mm

DB2ER-THT-5.08

UL/CUL 技术参数
UL/CUL Technical Data

等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	15	-	10
接线范围 Wire Range	单芯线 Solid [AWG]	/		
	多芯线 Stranded [AWG]	/		
耐电压	Dielectric Voltage-Withstand	1.6KV		

IEC 技术参数
IEC Technical Data


过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	250	320	400
额定电流	Rated Current [A]	12	12	12
额定冲击电压	Impulse withstand voltage [KV]	4	4	4
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	/		
	柔性导线 Flexible[mm²]	/		

材料 Material

绝缘材料	Insulation Material	LCP
阻燃等级	Flame retardant rating	UL94V-0
导体材料	Conductor Material	Copper alloy
导体表面镀层	Plating of conductor surface	Sn plated

一般参数 Other Data

间距/极数	Pitch/Poles [mm]/[P]	5.08/2~24
剥线长度	Stripping Length [mm]	/
螺丝/扭矩	Screw/Torque(Max)[N.m]	/
工作温度	Operating temperature[℃]	-40~+130
焊锡温度	Soldering temperature	285℃ /10S
引针尺寸	Pin dimensions [mm]	1.0*1.0
PCB板孔径	PCB Hole Diameter [mm]	∅1.7





Pitch:5.08mm

DB2ERC-THT-5.08

UL/CUL 技术参数
UL/CUL Technical Data

等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	15	-	10
接线范围 Wire Range	单芯线 Solid [AWG]	/		
	多芯线 Stranded [AWG]	/		
耐电压	Dielectric Voltage-Withstand	1.6KV		

IEC 技术参数
IEC Technical Data


过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	250	320	400
额定电流	Rated Current [A]	12	12	12
额定冲击电压	Impulse withstand voltage [KV]	4	4	4
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	/		
	柔性导线 Flexible[mm²]	/		

材料 Material

绝缘材料	Insulation Material	LCP
阻燃等级	Flame retardant rating	UL94V-0
导体材料	Conductor Material	Copper alloy
导体表面镀层	Plating of conductor surface	Sn plated

一般参数 Other Data

间距/极数	Pitch/Poles [mm]/[P]	5.08/2~24
剥线长度	Stripping Length [mm]	/
螺丝/扭矩	Screw/Torque(Max)[N.m]	/
工作温度	Operating temperature[℃]	-40~+130
焊锡温度	Soldering temperature	285℃ /10S
引针尺寸	Pin dimensions [mm]	1.0*1.0
PCB板孔径	PCB Hole Diameter [mm]	∅1.7





Pitch:5.08mm

DB2ERM-THT-5.08

UL/CUL 技术参数
UL/CUL Technical Data

等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	15	-	10
接线范围 Wire Range	单芯线 Solid [AWG]	/		
	多芯线 Stranded [AWG]	/		
耐电压	Dielectric Voltage-Withstand	1.6KV		

IEC 技术参数
IEC Technical Data


过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	250	320	400
额定电流	Rated Current [A]	12	12	12
额定冲击电压	Impulse withstand voltage [KV]	4	4	4
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	/		
	柔性导线 Flexible[mm²]	/		


材料 Material

绝缘材料	Insulation Material	LCP
阻燃等级	Flame retardant rating	UL94V-0
导体材料	Conductor Material	Copper alloy
导体表面镀层	Plating of conductor surface	Sn plated

一般参数 Other Data

间距/极数	Pitch/Poles [mm]/[P]	5.08/2~24
剥线长度	Stripping Length [mm]	/
螺丝/扭矩	Screw/Torque(Max)[N.m]	/
工作温度	Operating temperature[℃]	-40~+130
焊锡温度	Soldering temperature	285℃ /10S
引针尺寸	Pin dimensions [mm]	1.0*1.0
PCB板孔径	PCB Hole Diameter [mm]	∅1.7

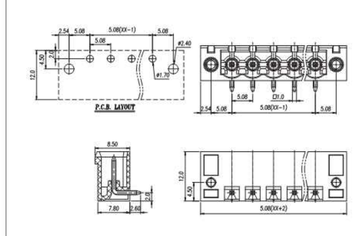




Pitch:5.0mm

DB2EAF-5.0

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	15	-	10
接线范围 Wire Range	单芯线 Solid [AWG]	/		
	多芯线 Stranded [AWG]	/		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	250	320	400
额定电流	Rated Current [A]	16	16	16
额定冲击电压	Impulse withstand voltage [KV]	4	4	4
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	/		
	柔性导线 Flexible[mm²]	/		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	5.0/2~4		
剥线长度	Stripping Length [mm]	/		
螺丝/扭矩	Screw/Torque(Max)[N.m]	/		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	250℃ /5S		
引针尺寸	Pin dimensions [mm]	1.0*1.0		
PCB板孔径	PCB Hole Diameter [mm]	∅1.7		






Pitch:5.0mm

DB2EBF-5.0

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	15	-	10
接线范围 Wire Range	单芯线 Solid [AWG]	/		
	多芯线 Stranded [AWG]	/		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	250	320	400
额定电流	Rated Current [A]	16	16	16
额定冲击电压	Impulse withstand voltage [KV]	4	4	4
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	/		
	柔性导线 Flexible[mm²]	/		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	5.0/2~4		
剥线长度	Stripping Length [mm]	/		
螺丝/扭矩	Screw/Torque(Max)[N.m]	/		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	250℃ /5S		
引针尺寸	Pin dimensions [mm]	1.0*1.0		
PCB板孔径	PCB Hole Diameter [mm]	∅1.7		






Pitch:5.0/5.08mm

DB2EVT-5.08

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	15	-	10
接线范围 Wire Range	单芯线 Solid [AWG]	/		
	多芯线 Stranded [AWG]	/		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	250	320	400
额定电流	Rated Current [A]	10	10	10
额定冲击电压	Impulse withstand voltage [KV]	4	4	4
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	/		
	柔性导线 Flexible[mm²]	/		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	5.0.5.08 2*2~2*24		
剥线长度	Stripping Length [mm]	/		
螺丝/扭矩	Screw/Torque(Max)[N.m]	/		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	250℃ /5S		
引针尺寸	Pin dimensions [mm]	1.0*1.0		
PCB板孔径	PCB Hole Diameter [mm]	∅1.7		






Pitch:5.0/5.08mm

DB2EVTM-5.0/5.08

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	15	-	10
接线范围 Wire Range	单芯线 Solid [AWG]	/		
	多芯线 Stranded [AWG]	/		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	250	320	400
额定电流	Rated Current [A]	10	10	10
额定冲击电压	Impulse withstand voltage [KV]	4	4	4
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	/		
	柔性导线 Flexible[mm²]	/		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	5.0.5.08 2*2~2*24		
剥线长度	Stripping Length [mm]	/		
螺丝/扭矩	Screw/Torque(Max)[N.m]	/		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	250℃ /5S		
引针尺寸	Pin dimensions [mm]	1.0*1.0		
PCB板孔径	PCB Hole Diameter [mm]	∅1.7		







Pitch:5.0/5.08mm

DB2ERT-5.0/5.08

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	15	-	10
接线范围 Wire Range	单芯线 Solid [AWG]	/		
	多芯线 Stranded [AWG]	/		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	250	320	400
额定电流	Rated Current [A]	10	10	10
额定冲击电压	Impulse withstand voltage [KV]	4	4	4
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	/		
	柔性导线 Flexible[mm²]	/		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	5.0.5.08 2*2~2*24		
剥线长度	Stripping Length [mm]	/		
螺丝/扭矩	Screw/Torque(Max)[N.m]	/		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	250℃ /5S		
引针尺寸	Pin dimensions [mm]	1.0*1.0		
PCB板孔径	PCB Hole Diameter [mm]	∅1.7		




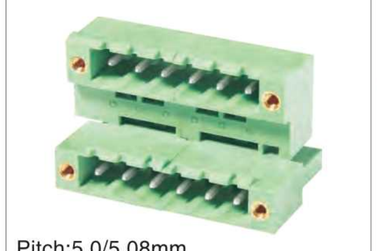

Pitch:5.0/5.08mm

DB2ERTM-5.0/5.08

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	15	-	10
接线范围 Wire Range	单芯线 Solid [AWG]	/		
	多芯线 Stranded [AWG]	/		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	250	320	400
额定电流	Rated Current [A]	10	10	10
额定冲击电压	Impulse withstand voltage [KV]	4	4	4
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	/		
	柔性导线 Flexible[mm²]	/		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	5.0.5.08 2*2~2*24		
剥线长度	Stripping Length [mm]	/		
螺丝/扭矩	Screw/Torque(Max)[N.m]	/		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	250℃ /5S		
引针尺寸	Pin dimensions [mm]	1.0*1.0		
PCB板孔径	PCB Hole Diameter [mm]	∅1.7		






Pitch:5.0/5.08mm

DB2EVTC-5.0/5.08

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	15	-	10
接线范围 Wire Range	单芯线 Solid [AWG]	/		
	多芯线 Stranded [AWG]	/		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	250	320	400
额定电流	Rated Current [A]	10	10	10
额定冲击电压	Impulse withstand voltage [KV]	4	4	4
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	/		
	柔性导线 Flexible[mm²]	/		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	5.0,5.08 2*2~2*24		
剥线长度	Stripping Length [mm]	/		
螺丝/扭矩	Screw/Torque(Max)[N.m]	/		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	250℃ /5S		
引针尺寸	Pin dimensions [mm]	1.0*1.0		
PCB板孔径	PCB Hole Diameter [mm]	∅1.7		






Pitch:5.0/5.08mm

DB2ERTC-5.0/5.08

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	15	-	10
接线范围 Wire Range	单芯线 Solid [AWG]	/		
	多芯线 Stranded [AWG]	/		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	250	320	400
额定电流	Rated Current [A]	10	10	10
额定冲击电压	Impulse withstand voltage [KV]	4	4	4
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	/		
	柔性导线 Flexible[mm²]	/		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	5.0,5.08 2*2~2*24		
剥线长度	Stripping Length [mm]	/		
螺丝/扭矩	Screw/Torque(Max)[N.m]	/		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	250℃ /5S		
引针尺寸	Pin dimensions [mm]	1.0*1.0		
PCB板孔径	PCB Hole Diameter [mm]	∅1.7		






Pitch:5.0/5.08mm

DB2EVH-5.0/5.08

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	15	-	10
接线范围 Wire Range	单芯线 Solid [AWG]	/		
	多芯线 Stranded [AWG]	/		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	250	320	630
额定电流	Rated Current [A]	10	10	10
额定冲击电压	Impulse withstand voltage [KV]	4	4	4
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	/		
	柔性导线 Flexible[mm²]	/		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	5.0,5.08/ 2*2~2*24		
剥线长度	Stripping Length [mm]	/		
螺丝/扭矩	Screw/Torque(Max)[N.m]	/		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	250℃ /5S		
引针尺寸	Pin dimensions [mm]	1.0*1.0		
PCB板孔径	PCB Hole Diameter [mm]	∅1.7		






Pitch:5.0/5.08mm

DB2EVH-5.0/5.08

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	15	-	10
接线范围 Wire Range	单芯线 Solid [AWG]	/		
	多芯线 Stranded [AWG]	/		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	250	320	630
额定电流	Rated Current [A]	10	10	10
额定冲击电压	Impulse withstand voltage [KV]	4	4	4
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	/		
	柔性导线 Flexible[mm²]	/		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	5.0,5.08/ 2*2~2*24		
剥线长度	Stripping Length [mm]	/		
螺丝/扭矩	Screw/Torque(Max)[N.m]	/		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	250℃ /5S		
引针尺寸	Pin dimensions [mm]	1.0*1.0		
PCB板孔径	PCB Hole Diameter [mm]	∅1.7		






Pitch:5.0/5.08mm

DB2ERH-5.0/5.08

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	15	-	10
接线范围 Wire Range	单芯线 Solid [AWG]	/		
	多芯线 Stranded [AWG]	/		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	250	320	630
额定电流	Rated Current [A]	10	10	10
额定冲击电压	Impulse withstand voltage [KV]	4	4	4
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	/		
	柔性导线 Flexible[mm²]	/		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	5.0,5.08/ 2*2~2*24		
剥线长度	Stripping Length [mm]	/		
螺丝/扭矩	Screw/Torque(Max)[N.m]	/		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	250℃ /5S		
引针尺寸	Pin dimensions [mm]	1.0*1.0		
PCB板孔径	PCB Hole Diameter [mm]	∅1.7		






Pitch:5.0/5.08mm

DB2ERHM-5.0/5.08

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	15	-	10
接线范围 Wire Range	单芯线 Solid [AWG]	/		
	多芯线 Stranded [AWG]	/		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	250	320	630
额定电流	Rated Current [A]	10	10	10
额定冲击电压	Impulse withstand voltage [KV]	4	4	4
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	/		
	柔性导线 Flexible[mm²]	/		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	5.0,5.08/ 2*2~2*24		
剥线长度	Stripping Length [mm]	/		
螺丝/扭矩	Screw/Torque(Max)[N.m]	/		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	250℃ /5S		
引针尺寸	Pin dimensions [mm]	1.0*1.0		
PCB板孔径	PCB Hole Diameter [mm]	∅1.7		






Pitch:5.0mm

DB2ERHB-5.0

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	15	-	10
接线范围 Wire Range	单芯线 Solid [AWG]	/		
	多芯线 Stranded [AWG]	/		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	250	320	400
额定电流	Rated Current [A]	12	12	12
额定冲击电压	Impulse withstand voltage [KV]	4	4	4
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	/		
	柔性导线 Flexible[mm²]	/		
材料 Material				
绝缘材料	Insulation Material	LCP		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	5.0/2*2~2*24		
剥线长度	Stripping Length [mm]	/		
螺丝/扭矩	Screw/Torque(Max)[N.m]	/		
工作温度	Operating temperature[℃]	-40~+130		
焊锡温度	Soldering temperature	285℃ /10S		
引针尺寸	Pin dimensions [mm]	1.0*1.0		
PCB板孔径	PCB Hole Diameter [mm]	∅1.7		






Pitch:5.0mm

DB2ERHBM-5.0

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	15	-	10
接线范围 Wire Range	单芯线 Solid [AWG]	/		
	多芯线 Stranded [AWG]	/		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	250	320	400
额定电流	Rated Current [A]	12	12	12
额定冲击电压	Impulse withstand voltage [KV]	4	4	4
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	/		
	柔性导线 Flexible[mm²]	/		
材料 Material				
绝缘材料	Insulation Material	LCP		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	5.0/2*2~2*24		
剥线长度	Stripping Length [mm]	/		
螺丝/扭矩	Screw/Torque(Max)[N.m]	/		
工作温度	Operating temperature[℃]	-40~+130		
焊锡温度	Soldering temperature	285℃ /10S		
引针尺寸	Pin dimensions [mm]	1.0*1.0		
PCB板孔径	PCB Hole Diameter [mm]	∅1.7		






Pitch:5.0mm

DB2ERHBN-5.0

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	15	-	10
接线范围 Wire Range	单芯线 Solid [AWG]	/		
	多芯线 Stranded [AWG]	/		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	250	320	400
额定电流	Rated Current [A]	12	12	12
额定冲击电压	Impulse withstand voltage [KV]	4	4	4
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	/		
	柔性导线 Flexible[mm²]	/		
材料 Material				
绝缘材料	Insulation Material	LCP		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	5.0/2*2~2*24		
剥线长度	Stripping Length [mm]	/		
螺丝/扭矩	Screw/Torque(Max)[N.m]	/		
工作温度	Operating temperature[℃]	-40~+130		
焊锡温度	Soldering temperature	285℃ /10S		
引针尺寸	Pin dimensions [mm]	1.0*1.0		
PCB板孔径	PCB Hole Diameter [mm]	∅1.7		






Pitch:5.0mm

DB2EVHB-5.0

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	15	-	10
接线范围 Wire Range	单芯线 Solid [AWG]	/		
	多芯线 Stranded [AWG]	/		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	250	320	400
额定电流	Rated Current [A]	12	12	12
额定冲击电压	Impulse withstand voltage [KV]	4	4	4
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	/		
	柔性导线 Flexible[mm²]	/		
材料 Material				
绝缘材料	Insulation Material	LCP		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	5.0/2*2~2*24		
剥线长度	Stripping Length [mm]	/		
螺丝/扭矩	Screw/Torque(Max)[N.m]	/		
工作温度	Operating temperature[℃]	-40~+130		
焊锡温度	Soldering temperature	285℃ /10S		
引针尺寸	Pin dimensions [mm]	1.0*1.0		
PCB板孔径	PCB Hole Diameter [mm]	∅1.7		






Pitch:5.0mm

DB2EVHBM-5.0

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	15	-	10
接线范围 Wire Range	单芯线 Solid [AWG]	/		
	多芯线 Stranded [AWG]	/		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	250	320	400
额定电流	Rated Current [A]	12	12	12
额定冲击电压	Impulse withstand voltage [KV]	4	4	4
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	/		
	柔性导线 Flexible[mm²]	/		
材料 Material				
绝缘材料	Insulation Material	LCP		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	5.0/2*2~2*24		
剥线长度	Stripping Length [mm]	/		
螺丝/扭矩	Screw/Torque(Max)[N.m]	/		
工作温度	Operating temperature[℃]	-40~+130		
焊锡温度	Soldering temperature	285℃ /10S		
引针尺寸	Pin dimensions [mm]	1.0*1.0		
PCB板孔径	PCB Hole Diameter [mm]	∅1.7		






Pitch:5.0mm

DB2EVHBN-5.0

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	15	-	10
接线范围 Wire Range	单芯线 Solid [AWG]	/		
	多芯线 Stranded [AWG]	/		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	250	320	400
额定电流	Rated Current [A]	12	12	12
额定冲击电压	Impulse withstand voltage [KV]	4	4	4
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	/		
	柔性导线 Flexible[mm²]	/		
材料 Material				
绝缘材料	Insulation Material	LCP		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	5.0/2*2~2*24		
剥线长度	Stripping Length [mm]	/		
螺丝/扭矩	Screw/Torque(Max)[N.m]	/		
工作温度	Operating temperature[℃]	-40~+130		
焊锡温度	Soldering temperature	285℃ /10S		
引针尺寸	Pin dimensions [mm]	1.0*1.0		
PCB板孔径	PCB Hole Diameter [mm]	∅1.7		






Pitch:5.0/5.08mm

DB2EL-5.0/5.08

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	15	-	10
接线范围 Wire Range	单芯线 Solid [AWG]	/		
	多芯线 Stranded [AWG]	/		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	250	320	400
额定电流	Rated Current [A]	12	12	12
额定冲击电压	Impulse withstand voltage [KV]	4	4	4
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	/		
	柔性导线 Flexible[mm²]	/		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	5.0,5.08/2~24		
剥线长度	Stripping Length [mm]	/		
螺丝/扭矩	Screw/Torque(Max)[N.m]	/		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	250℃ /5S		
引针尺寸	Pin dimensions [mm]	1.0*1.0		
PCB板孔径	PCB Hole Diameter [mm]	∅1.7		






Pitch:5.0/5.08mm

DB2ELC-5.0/5.08

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	15	-	10
接线范围 Wire Range	单芯线 Solid [AWG]	/		
	多芯线 Stranded [AWG]	/		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	250	320	400
额定电流	Rated Current [A]	12	12	12
额定冲击电压	Impulse withstand voltage [KV]	4	4	4
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	/		
	柔性导线 Flexible[mm²]	/		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	5.0,5.08/2~24		
剥线长度	Stripping Length [mm]	/		
螺丝/扭矩	Screw/Torque(Max)[N.m]	/		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	250℃ /5S		
引针尺寸	Pin dimensions [mm]	1.0*1.0		
PCB板孔径	PCB Hole Diameter [mm]	∅1.7		






Pitch:5.0/5.08mm

DB2ELM-5.0/5.08

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	15	-	10
接线范围 Wire Range	单芯线 Solid [AWG]	/		
	多芯线 Stranded [AWG]	/		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	250	320	400
额定电流	Rated Current [A]	12	12	12
额定冲击电压	Impulse withstand voltage [KV]	4	4	4
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	/		
	柔性导线 Flexible[mm²]	/		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	5.0,5.08/2~24		
剥线长度	Stripping Length [mm]	/		
螺丝/扭矩	Screw/Torque(Max)[N.m]	/		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	250℃ /5S		
引针尺寸	Pin dimensions [mm]	1.0*1.0		
PCB板孔径	PCB Hole Diameter [mm]	∅1.7		






Pitch:5.08mm

DB2EKR-5.08

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	15	-	10
接线范围 Wire Range	单芯线 Solid [AWG]	28~12		
	多芯线 Stranded [AWG]	28~12		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	250	320	630
额定电流	Rated Current [A]	12	12	12
额定冲击电压	Impulse withstand voltage [KV]	4	4	4
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	0.2~2.5		
	柔性导线 Flexible[mm²]	0.2~2.5		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	5.08/2~24		
剥线长度	Stripping Length [mm]	7-8		
螺丝/扭矩	Screw/Torque(Max)[N.m]	M3/0.5		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	/		
引针尺寸	Pin dimensions [mm]	/		
PCB板孔径	PCB Hole Diameter [mm]	/		






Pitch:5.08mm

DB2EKRM-5.08

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	15	-	10
接线范围 Wire Range	单芯线 Solid [AWG]	28~12		
	多芯线 Stranded [AWG]	28~12		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	250	320	630
额定电流	Rated Current [A]	12	12	12
额定冲击电压	Impulse withstand voltage [KV]	4	4	4
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	0.2~2.5		
	柔性导线 Flexible[mm²]	0.2~2.5		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	5.08/2~24		
剥线长度	Stripping Length [mm]	7-8		
螺丝/扭矩	Screw/Torque(Max)[N.m]	M3/0.5		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	/		
引针尺寸	Pin dimensions [mm]	/		
PCB板孔径	PCB Hole Diameter [mm]	/		






Pitch:5.08mm

DB2EKRN-5.08

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	15	-	10
接线范围 Wire Range	单芯线 Solid [AWG]	28~12		
	多芯线 Stranded [AWG]	28~12		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	250	320	630
额定电流	Rated Current [A]	12	12	12
额定冲击电压	Impulse withstand voltage [KV]	4	4	4
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	0.2~2.5		
	柔性导线 Flexible[mm²]	0.2~2.5		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	5.08/2~24		
剥线长度	Stripping Length [mm]	7~8		
螺丝/扭矩	Screw/Torque(Max)[N.m]	M3/0.5		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	/		
引针尺寸	Pin dimensions [mm]	/		
PCB板孔径	PCB Hole Diameter [mm]	/		






Pitch:7.62mm

DB2EKR-7.62

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	15	-	10
接线范围 Wire Range	单芯线 Solid [AWG]	28~12		
	多芯线 Stranded [AWG]	28~12		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	400	630	1000
额定电流	Rated Current [A]	12	12	12
额定冲击电压	Impulse withstand voltage [KV]	6	6	6
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	0.2~2.5		
	柔性导线 Flexible[mm²]	0.2~2.5		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	7.62/2~24		
剥线长度	Stripping Length [mm]	7~8		
螺丝/扭矩	Screw/Torque(Max)[N.m]	M3/0.5		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	/		
引针尺寸	Pin dimensions [mm]	/		
PCB板孔径	PCB Hole Diameter [mm]	/		






Pitch:7.62mm

DB2EKRM-7.62

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	15	-	10
接线范围 Wire Range	单芯线 Solid [AWG]	28~12		
	多芯线 Stranded [AWG]	28~12		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	400	630	1000
额定电流	Rated Current [A]	12	12	12
额定冲击电压	Impulse withstand voltage [KV]	6	6	6
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	0.2~2.5		
	柔性导线 Flexible[mm²]	0.2~2.5		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	7.62/2~24		
剥线长度	Stripping Length [mm]	7~8		
螺丝/扭矩	Screw/Torque(Max)[N.m]	M3/0.5		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	/		
引针尺寸	Pin dimensions [mm]	/		
PCB板孔径	PCB Hole Diameter [mm]	/		






Pitch:7.62mm

DB2EKRN-7.62

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	15	-	10
接线范围 Wire Range	单芯线 Solid [AWG]	28~12		
	多芯线 Stranded [AWG]	28~12		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	400	630	1000
额定电流	Rated Current [A]	12	12	12
额定冲击电压	Impulse withstand voltage [KV]	6	6	6
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	0.2~2.5		
	柔性导线 Flexible[mm²]	0.2~2.5		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	7.62/2~24		
剥线长度	Stripping Length [mm]	7~8		
螺丝/扭矩	Screw/Torque(Max)[N.m]	M3/0.5		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	/		
引针尺寸	Pin dimensions [mm]	/		
PCB板孔径	PCB Hole Diameter [mm]	/		






Pitch:5.0/5.08mm

DB2EKDR-5.0/5.08

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	10	-	10
接线范围 Wire Range	单芯线 Solid [AWG]	28~12		
	多芯线 Stranded [AWG]	28~12		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	320	320	630
额定电流	Rated Current [A]	12	12	12
额定冲击电压	Impulse withstand voltage [KV]	4	4	4
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	0.2~2.5		
	柔性导线 Flexible[mm²]	0.2~2.5		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	5.0,5.08/2~24		
剥线长度	Stripping Length [mm]	7-8		
螺丝/扭矩	Screw/Torque(Max)[N.m]	/		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	/		
引针尺寸	Pin dimensions [mm]	/		
PCB板孔径	PCB Hole Diameter [mm]	/		

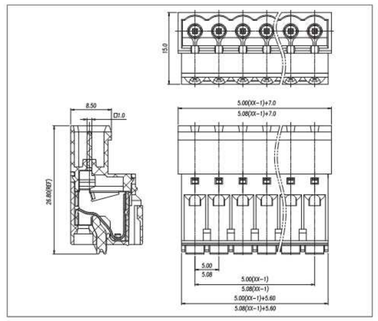




Pitch:5.0/5.08mm

DB2EKDRM-5.0/5.08

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	10	-	10
接线范围 Wire Range	单芯线 Solid [AWG]	28~12		
	多芯线 Stranded [AWG]	28~12		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	320	320	630
额定电流	Rated Current [A]	12	12	12
额定冲击电压	Impulse withstand voltage [KV]	4	4	4
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	0.2~2.5		
	柔性导线 Flexible[mm²]	0.2~2.5		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	5.0,5.08/2~24		
剥线长度	Stripping Length [mm]	7~8		
螺丝/扭矩	Screw/Torque(Max)[N.m]	/		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	/		
引针尺寸	Pin dimensions [mm]	/		
PCB板孔径	PCB Hole Diameter [mm]	/		

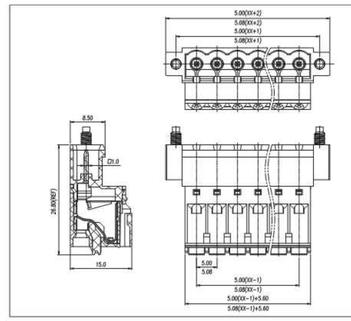




Pitch:5.0/5.08mm

DB2EKDRN-5.0/5.08

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	10	-	10
接线范围 Wire Range	单芯线 Solid [AWG]	28~12		
	多芯线 Stranded [AWG]	28~12		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	320	320	630
额定电流	Rated Current [A]	12	12	12
额定冲击电压	Impulse withstand voltage [KV]	4	4	4
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	0.2~2.5		
	柔性导线 Flexible[mm²]	0.2~2.5		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	5.0,5.08/2~24		
剥线长度	Stripping Length [mm]	7~8		
螺丝/扭矩	Screw/Torque(Max)[N.m]	/		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	/		
引针尺寸	Pin dimensions [mm]	/		
PCB板孔径	PCB Hole Diameter [mm]	/		

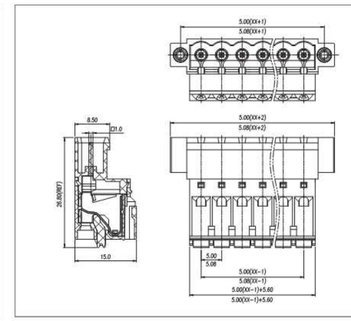




Pitch:5.0/5.08mm

DB2EKDRG-5.0/5.08

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	10	-	10
接线范围 Wire Range	单芯线 Solid [AWG]	28~12		
	多芯线 Stranded [AWG]	28~12		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	320	320	630
额定电流	Rated Current [A]	12	12	12
额定冲击电压	Impulse withstand voltage [KV]	4	4	4
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	0.2~2.5		
	柔性导线 Flexible[mm²]	0.2~2.5		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	5.0,5.08/2~24		
剥线长度	Stripping Length [mm]	7~8		
螺丝/扭矩	Screw/Torque(Max)[N.m]	/		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	/		
引针尺寸	Pin dimensions [mm]	/		
PCB板孔径	PCB Hole Diameter [mm]	/		






Pitch:5.08mm

DB2EKRZ-5.08

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	15	-	10
接线范围 Wire Range	单芯线 Solid [AWG]	28~12		
	多芯线 Stranded [AWG]	28~12		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	250	320	630
额定电流	Rated Current [A]	12	12	12
额定冲击电压	Impulse withstand voltage [KV]	4	4	4
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	0.2~2.5		
	柔性导线 Flexible[mm²]	0.2~2.5		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	5.08/2~24		
剥线长度	Stripping Length [mm]	7~8		
螺丝/扭矩	Screw/Torque(Max)[N.m]	M3/0.5		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	/		
引针尺寸	Pin dimensions [mm]	/		
PCB板孔径	PCB Hole Diameter [mm]	/		

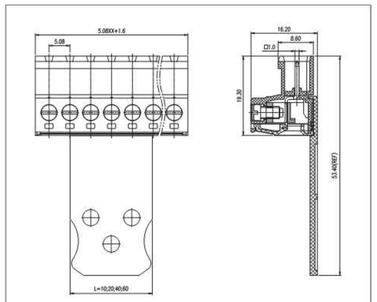




Pitch:5.08mm

DB2EGB-5.08

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	15	-	10
接线范围 Wire Range	单芯线 Solid [AWG]	28~12		
	多芯线 Stranded [AWG]	28~12		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	320	320	630
额定电流	Rated Current [A]	12	12	12
额定冲击电压	Impulse withstand voltage [KV]	4	4	4
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	0.2~2.5		
	柔性导线 Flexible[mm²]	0.2~2.5		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	5.08/2~24		
剥线长度	Stripping Length [mm]	7-8		
螺丝/扭矩	Screw/Torque(Max)[N.m]	M3/0.5		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	/		
引针尺寸	Pin dimensions [mm]	/		
PCB板孔径	PCB Hole Diameter [mm]	/		

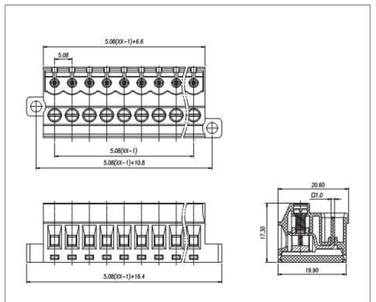




Pitch:5.08mm

DB2EGBM-5.08

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	15	-	10
接线范围 Wire Range	单芯线 Solid [AWG]	28~12		
	多芯线 Stranded [AWG]	28~12		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	320	320	630
额定电流	Rated Current [A]	12	12	12
额定冲击电压	Impulse withstand voltage [KV]	4	4	4
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	0.2~2.5		
	柔性导线 Flexible[mm²]	0.2~2.5		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	5.08/2~24		
剥线长度	Stripping Length [mm]	7-8		
螺丝/扭矩	Screw/Torque(Max)[N.m]	M3/0.5		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	/		
引针尺寸	Pin dimensions [mm]	/		
PCB板孔径	PCB Hole Diameter [mm]	/		

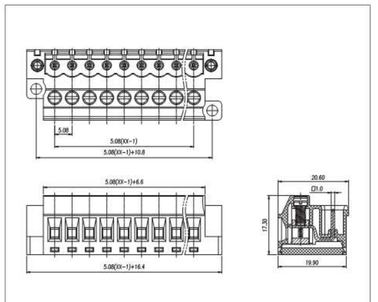




Pitch:5.08mm

DB2EVK-5.08

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	15	-	10
接线范围 Wire Range	单芯线 Solid [AWG]	28~12		
	多芯线 Stranded [AWG]	28~12		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	320	320	630
额定电流	Rated Current [A]	12	12	12
额定冲击电压	Impulse withstand voltage [KV]	4	4	4
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	0.2~2.5		
	柔性导线 Flexible[mm²]	0.2~2.5		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	5.08/6~24		
剥线长度	Stripping Length [mm]	7-8		
螺丝/扭矩	Screw/Torque(Max)[N.m]	M3/0.5		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	/		
引针尺寸	Pin dimensions [mm]	/		
PCB板孔径	PCB Hole Diameter [mm]	/		

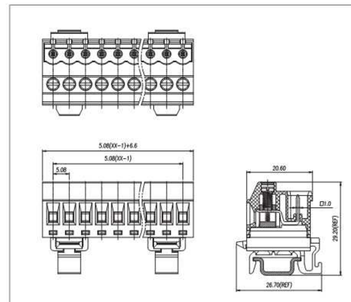




Pitch:5.08mm

DB2EVKM-5.08

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	15	-	10
接线范围 Wire Range	单芯线 Solid [AWG]	28~12		
	多芯线 Stranded [AWG]	28~12		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	320	320	630
额定电流	Rated Current [A]	12	12	12
额定冲击电压	Impulse withstand voltage [KV]	4	4	4
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	0.2~2.5		
	柔性导线 Flexible[mm²]	0.2~2.5		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	5.08/6~24		
剥线长度	Stripping Length [mm]	7-8		
螺丝/扭矩	Screw/Torque(Max)[N.m]	M3/0.5		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	/		
引针尺寸	Pin dimensions [mm]	/		
PCB板孔径	PCB Hole Diameter [mm]	/		

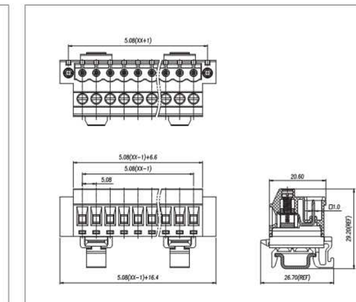




Pitch:5.08mm

DB2EUVK-5.08

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	15	-	10
接线范围 Wire Range	单芯线 Solid [AWG]	28~12		
	多芯线 Stranded [AWG]	28~12		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	320	320	630
额定电流	Rated Current [A]	12	12	12
额定冲击电压	Impulse withstand voltage [KV]	4	4	4
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	0.2~2.5		
	柔性导线 Flexible[mm²]	0.2~2.5		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	5.08/6~24		
剥线长度	Stripping Length [mm]	7-8		
螺丝/扭矩	Screw/Torque(Max)[N.m]	M3/0.5		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	/		
引针尺寸	Pin dimensions [mm]	/		
PCB板孔径	PCB Hole Diameter [mm]	/		






Pitch:5.08mm

DB2EUVK-5.08

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	15	-	10
接线范围 Wire Range	单芯线 Solid [AWG]	28~12		
	多芯线 Stranded [AWG]	28~12		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	320	320	630
额定电流	Rated Current [A]	12	12	12
额定冲击电压	Impulse withstand voltage [KV]	4	4	4
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	0.2~2.5		
	柔性导线 Flexible[mm²]	0.2~2.5		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	5.08/6~24		
剥线长度	Stripping Length [mm]	7-8		
螺丝/扭矩	Screw/Torque(Max)[N.m]	M3/0.5		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	/		
引针尺寸	Pin dimensions [mm]	/		
PCB板孔径	PCB Hole Diameter [mm]	/		

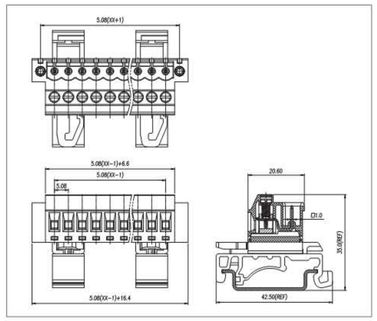




Pitch:5.0/5.08mm

DB2ERK-5.0/5.08

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	15	-	10
接线范围 Wire Range	单芯线 Solid [AWG]	28~12		
	多芯线 Stranded [AWG]	28~12		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	250	320	630
额定电流	Rated Current [A]	12	12	12
额定冲击电压	Impulse withstand voltage [KV]	4	4	4
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	0.2~2.5		
	柔性导线 Flexible[mm²]	0.2~2.5		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	5.0,5.08/6~24		
剥线长度	Stripping Length [mm]	7-8		
螺丝/扭矩	Screw/Torque(Max)[N.m]	M3/0.5		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	/		
引针尺寸	Pin dimensions [mm]	/		
PCB板孔径	PCB Hole Diameter [mm]	/		

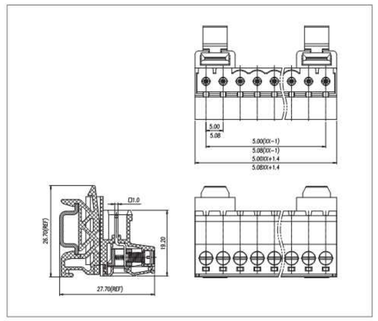




Pitch:5.0/5.08mm

DB2ERKM-5.0/5.08

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	15	-	10
接线范围 Wire Range	单芯线 Solid [AWG]	28~12		
	多芯线 Stranded [AWG]	28~12		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	250	320	630
额定电流	Rated Current [A]	12	12	12
额定冲击电压	Impulse withstand voltage [KV]	4	4	4
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	0.2~2.5		
	柔性导线 Flexible[mm²]	0.2~2.5		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	5.0,5.08/6~24		
剥线长度	Stripping Length [mm]	7-8		
螺丝/扭矩	Screw/Torque(Max)[N.m]	M3/0.5		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	/		
引针尺寸	Pin dimensions [mm]	/		
PCB板孔径	PCB Hole Diameter [mm]	/		

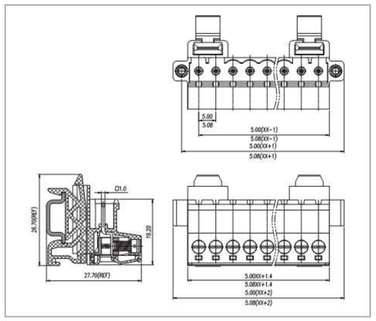




Pitch:5.0/5.08mm

DBEURK-5.0/5.08

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	15	-	10
接线范围 Wire Range	单芯线 Solid [AWG]	28~12		
	多芯线 Stranded [AWG]	28~12		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	250	320	630
额定电流	Rated Current [A]	12	12	12
额定冲击电压	Impulse withstand voltage [KV]	4	4	4
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	0.2~2.5		
	柔性导线 Flexible[mm²]	0.2~2.5		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	5.0,5.08/6~24		
剥线长度	Stripping Length [mm]	7-8		
螺丝/扭矩	Screw/Torque(Max)[N.m]	M3/0.5		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	/		
引针尺寸	Pin dimensions [mm]	/		
PCB板孔径	PCB Hole Diameter [mm]	/		

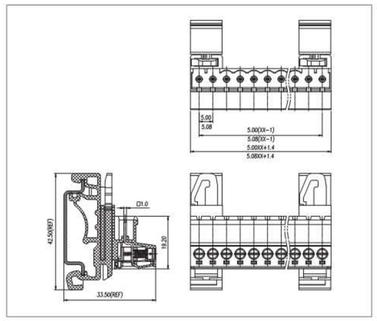




Pitch:5.0/5.08mm

DB2EURKM-5.0/5.08

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	15	-	10
接线范围 Wire Range	单芯线 Solid [AWG]	28~12		
	多芯线 Stranded [AWG]	28~12		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	250	320	630
额定电流	Rated Current [A]	12	12	12
额定冲击电压	Impulse withstand voltage [KV]	4	4	4
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	0.2~2.5		
	柔性导线 Flexible[mm²]	0.2~2.5		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	5.0,5.08/6~24		
剥线长度	Stripping Length [mm]	7-8		
螺丝/扭矩	Screw/Torque(Max)[N.m]	M3/0.5		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	/		
引针尺寸	Pin dimensions [mm]	/		
PCB板孔径	PCB Hole Diameter [mm]	/		

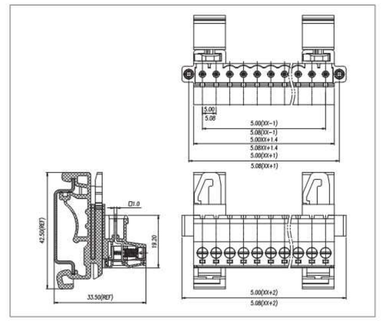



Pitch:5.0mm

DB2EKP-5.0

UL/CUL 技术参数 UL/CUL Technical Data

等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	10	-	10
接线范围 Wire Range	单芯线 Solid [AWG]	28~12		
	多芯线 Stranded [AWG]	28~12		
耐电压	Dielectric Voltage-Withstand	1.6KV		

IEC 技术参数 IEC Technical Data


过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	160	250	320
额定电流	Rated Current [A]	17.5	17.5	17.5
额定冲击电压	Impulse withstand voltage [KV]	4	4	4
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	0.2~2.5		
	柔性导线 Flexible[mm²]	0.2~2.5		


材料 Material

绝缘材料	Insulation Material	PA66
阻燃等级	Flame retardant rating	UL94V-0
导体材料	Conductor Material	Copper alloy
导体表面镀层	Plating of conductor surface	Ni plated

一般参数 Other Data

间距/极数	Pitch/Poles [mm]/[P]	5.0/2~24
剥线长度	Stripping Length [mm]	7-8
螺丝/扭矩	Screw/Torque(Max)[N.m]	M3/0.5
工作温度	Operating temperature[℃]	-40~+105
焊锡温度	Soldering temperature	/
引针尺寸	Pin dimensions [mm]	/
PCB板孔径	PCB Hole Diameter [mm]	/





Pitch: 5.08mm

DB2CM-5.08

UL/CUL 技术参数 UL/CUL Technical Data

等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	15	-	10
接线范围 Wire Range	单芯线 Solid [AWG]	/		
	多芯线 Stranded [AWG]	/		
耐电压	Dielectric Voltage-Withstand	1.6KV		

IEC 技术参数 IEC Technical Data


过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	320	320	630
额定电流	Rated Current [A]	12	12	12
额定冲击电压	Impulse withstand voltage [KV]	4	4	4
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	/		
	柔性导线 Flexible[mm²]	/		

材料 Material

绝缘材料	Insulation Material	PA66
阻燃等级	Flame retardant rating	UL94V-0
导体材料	Conductor Material	Copper alloy
导体表面镀层	Plating of conductor surface	Sn plated

一般参数 Other Data

间距/极数	Pitch/Poles [mm]/[P]	5.08/2~24
剥线长度	Stripping Length [mm]	/
螺丝/扭矩	Screw/Torque(Max)[N.m]	/
工作温度	Operating temperature[℃]	-40~+105
焊锡温度	Soldering temperature	250℃ /5S
引针尺寸	Pin dimensions [mm]	/
PCB板孔径	PCB Hole Diameter [mm]	/





Pitch: 5.08mm

DB2CVC-5.08

UL/CUL 技术参数 UL/CUL Technical Data

等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	15	-	10
接线范围 Wire Range	单芯线 Solid [AWG]	/		
	多芯线 Stranded [AWG]	/		
耐电压	Dielectric Voltage-Withstand	1.6KV		

IEC 技术参数 IEC Technical Data


过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	250	320	400
额定电流	Rated Current [A]	10	10	10
额定冲击电压	Impulse withstand voltage [KV]	4	4	4
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	/		
	柔性导线 Flexible[mm²]	/		

材料 Material

绝缘材料	Insulation Material	PBT
阻燃等级	Flame retardant rating	UL94V-0
导体材料	Conductor Material	Copper alloy
导体表面镀层	Plating of conductor surface	Sn plated

一般参数 Other Data

间距/极数	Pitch/Poles [mm]/[P]	5.08/2~24
剥线长度	Stripping Length [mm]	/
螺丝/扭矩	Screw/Torque(Max)[N.m]	/
工作温度	Operating temperature[℃]	-40~+105
焊锡温度	Soldering temperature	250℃ /5S
引针尺寸	Pin dimensions [mm]	/
PCB板孔径	PCB Hole Diameter [mm]	/

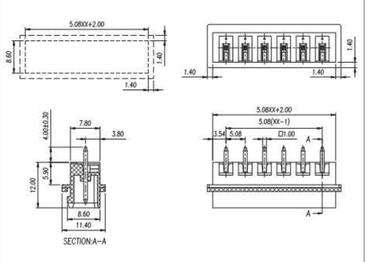



Pitch:5.08mm

DB2CRC-5.08

UL/CUL 技术参数 UL/CUL Technical Data

等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	15	-	10
接线范围 Wire Range	单芯线 Solid [AWG]	/		
	多芯线 Stranded [AWG]	/		
耐电压	Dielectric Voltage-Withstand	1.6KV		

IEC 技术参数 IEC Technical Data


过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	250	320	400
额定电流	Rated Current [A]	10	10	10
额定冲击电压	Impulse withstand voltage [KV]	4	4	4
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	/		
	柔性导线 Flexible[mm²]	/		


材料 Material

绝缘材料	Insulation Material	PBT
阻燃等级	Flame retardant rating	UL94V-0
导体材料	Conductor Material	Copper alloy
导体表面镀层	Plating of conductor surface	Sn plated

一般参数 Other Data

间距/极数	Pitch/Poles [mm]/[P]	5.08/2~24
剥线长度	Stripping Length [mm]	/
螺丝/扭矩	Screw/Torque(Max)[N.m]	/
工作温度	Operating temperature[℃]	-40~+105
焊锡温度	Soldering temperature	250℃ /5S
引针尺寸	Pin dimensions [mm]	/
PCB板孔径	PCB Hole Diameter [mm]	/

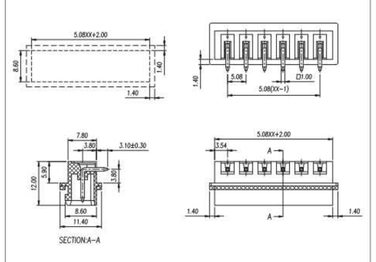

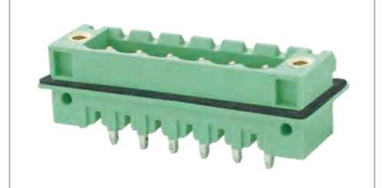

Pitch:5.08mm

DB2CVM-5.08

UL/CUL 技术参数 UL/CUL Technical Data

等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	15	-	10
接线范围 Wire Range	单芯线 Solid [AWG]	/		
	多芯线 Stranded [AWG]	/		
耐电压	Dielectric Voltage-Withstand	1.6KV		

IEC 技术参数 IEC Technical Data


过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	250	320	400
额定电流	Rated Current [A]	10	10	10
额定冲击电压	Impulse withstand voltage [KV]	4	4	4
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	/		
	柔性导线 Flexible[mm²]	/		

材料 Material

绝缘材料	Insulation Material	PBT
阻燃等级	Flame retardant rating	UL94V-0
导体材料	Conductor Material	Copper alloy
导体表面镀层	Plating of conductor surface	Sn plated

一般参数 Other Data

间距/极数	Pitch/Poles [mm]/[P]	5.08/2~24
剥线长度	Stripping Length [mm]	/
螺丝/扭矩	Screw/Torque(Max)[N.m]	/
工作温度	Operating temperature[℃]	-40~+105
焊锡温度	Soldering temperature	250℃ /5S
引针尺寸	Pin dimensions [mm]	/
PCB板孔径	PCB Hole Diameter [mm]	/

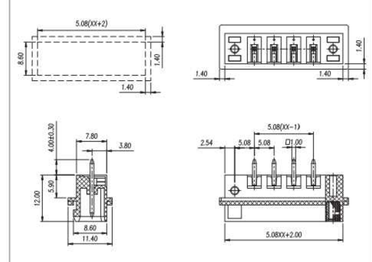



Pitch:5.08mm

DB2CRM-5.08

UL/CUL 技术参数 UL/CUL Technical Data

等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	15	-	10
接线范围 Wire Range	单芯线 Solid [AWG]	/		
	多芯线 Stranded [AWG]	/		
耐电压	Dielectric Voltage-Withstand	1.6KV		

IEC 技术参数 IEC Technical Data


过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	250	320	400
额定电流	Rated Current [A]	10	10	10
额定冲击电压	Impulse withstand voltage [KV]	4	4	4
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	/		
	柔性导线 Flexible[mm²]	/		

材料 Material

绝缘材料	Insulation Material	PBT
阻燃等级	Flame retardant rating	UL94V-0
导体材料	Conductor Material	Copper alloy
导体表面镀层	Plating of conductor surface	Sn plated

一般参数 Other Data

间距/极数	Pitch/Poles [mm]/[P]	5.08/2~24
剥线长度	Stripping Length [mm]	/
螺丝/扭矩	Screw/Torque(Max)[N.m]	/
工作温度	Operating temperature[℃]	-40~+105
焊锡温度	Soldering temperature	250℃ /5S
引针尺寸	Pin dimensions [mm]	/
PCB板孔径	PCB Hole Diameter [mm]	/

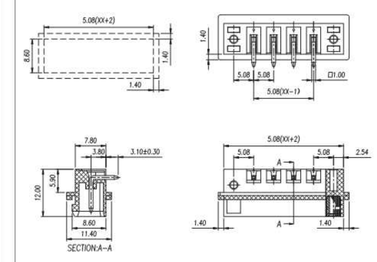



Pitch:3.96mm

DB2ETK-3.96

UL/CUL 技术参数
UL/CUL Technical Data

等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	-
额定电流	Rated Current [A]	8	-	-
接线范围 Wire Range	单芯线 Solid [AWG]	26~16		
	多芯线 Stranded [AWG]	26~16		
耐电压	Dielectric Voltage-Withstand	1.6KV		

IEC 技术参数
IEC Technical Data


过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	160	160	320
额定电流	Rated Current [A]	10	10	10
额定冲击电压	Impulse withstand voltage [KV]	4	4	4
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	0.2~1.0		
	柔性导线 Flexible[mm²]	0.2~1.0		

材料 Material

绝缘材料	Insulation Material	PA66
阻燃等级	Flame retardant rating	UL94V-0
导体材料	Conductor Material	Copper alloy
导体表面镀层	Plating of conductor surface	Ni plated

一般参数 Other Data

间距/极数	Pitch/Poles [mm]/[P]	3.96/2~24
剥线长度	Stripping Length [mm]	5~6
螺丝/扭矩	Screw/Torque(Max)[N.m]	M2/0.2
工作温度	Operating temperature[℃]	-40~+105
焊锡温度	Soldering temperature	/
引针尺寸	Pin dimensions [mm]	/
PCB板孔径	PCB Hole Diameter [mm]	/





Pitch:3.96mm

DB2ETV-3.96

UL/CUL 技术参数
UL/CUL Technical Data

等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	-
额定电流	Rated Current [A]	8	-	-
接线范围 Wire Range	单芯线 Solid [AWG]	/		
	多芯线 Stranded [AWG]	/		
耐电压	Dielectric Voltage-Withstand	1.6KV		

IEC 技术参数
IEC Technical Data


过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	160	160	320
额定电流	Rated Current [A]	10	10	10
额定冲击电压	Impulse withstand voltage [KV]	4	4	4
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	/		
	柔性导线 Flexible[mm²]	/		

材料 Material

绝缘材料	Insulation Material	PA66
阻燃等级	Flame retardant rating	UL94V-0
导体材料	Conductor Material	Copper alloy
导体表面镀层	Plating of conductor surface	Sn plated

一般参数 Other Data

间距/极数	Pitch/Poles [mm]/[P]	3.96/2~24
剥线长度	Stripping Length [mm]	/
螺丝/扭矩	Screw/Torque(Max)[N.m]	/
工作温度	Operating temperature[℃]	-40~+105
焊锡温度	Soldering temperature	250℃ /5S
引针尺寸	Pin dimensions [mm]	1.0*1.0
PCB板孔径	PCB Hole Diameter [mm]	∅1.7





Pitch:3.96mm

DB2ETR-3.96

UL/CUL 技术参数
UL/CUL Technical Data

等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	-
额定电流	Rated Current [A]	8	-	-
接线范围 Wire Range	单芯线 Solid [AWG]	/		
	多芯线 Stranded [AWG]	/		
耐电压	Dielectric Voltage-Withstand	1.6KV		

IEC 技术参数
IEC Technical Data


过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	160	160	320
额定电流	Rated Current [A]	10	10	10
额定冲击电压	Impulse withstand voltage [KV]	4	4	4
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	/		
	柔性导线 Flexible[mm²]	/		

材料 Material

绝缘材料	Insulation Material	PA66
阻燃等级	Flame retardant rating	UL94V-0
导体材料	Conductor Material	Copper alloy
导体表面镀层	Plating of conductor surface	Sn plated

一般参数 Other Data

间距/极数	Pitch/Poles [mm]/[P]	3.96/2~24
剥线长度	Stripping Length [mm]	/
螺丝/扭矩	Screw/Torque(Max)[N.m]	/
工作温度	Operating temperature[℃]	-40~+105
焊锡温度	Soldering temperature	250℃ /5S
引针尺寸	Pin dimensions [mm]	1.0*1.0
PCB板孔径	PCB Hole Diameter [mm]	∅1.7





Pitch:5.08mm

DB2ETK-5.08

UL/CUL 技术参数
UL/CUL Technical Data

等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	-
额定电流	Rated Current [A]	10	-	-
接线范围 Wire Range	单芯线 Solid [AWG]	22~14		
	多芯线 Stranded [AWG]	22~14		
耐电压	Dielectric Voltage-Withstand	1.6KV		

IEC 技术参数
IEC Technical Data


过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	250	320	400
额定电流	Rated Current [A]	12	12	12
额定冲击电压	Impulse withstand voltage [KV]	4	4	4
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	0.2~1.5		
	柔性导线 Flexible[mm²]	0.2~1.5		


材料 Material

绝缘材料	Insulation Material	PA66
阻燃等级	Flame retardant rating	UL94V-0
导体材料	Conductor Material	Copper alloy
导体表面镀层	Plating of conductor surface	Ni plated

一般参数 Other Data

间距/极数	Pitch/Poles [mm]/[P]	5.08/2~24
剥线长度	Stripping Length [mm]	5~6
螺丝/扭矩	Screw/Torque(Max)[N.m]	M2.5/0.4
工作温度	Operating temperature[℃]	-40~+105
焊锡温度	Soldering temperature	/
引针尺寸	Pin dimensions [mm]	/
PCB板孔径	PCB Hole Diameter [mm]	/



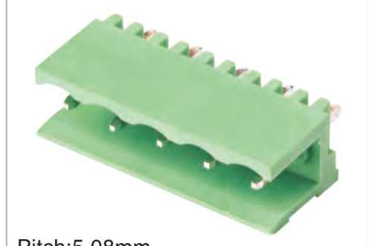

Pitch:5.08mm

DB2ETV-5.08

UL/CUL 技术参数
UL/CUL Technical Data

等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	-
额定电流	Rated Current [A]	10	-	-
接线范围 Wire Range	单芯线 Solid [AWG]	/		
	多芯线 Stranded [AWG]	/		
耐电压	Dielectric Voltage-Withstand	1.6KV		

IEC 技术参数
IEC Technical Data


过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	250	320	400
额定电流	Rated Current [A]	12	12	12
额定冲击电压	Impulse withstand voltage [KV]	4	4	4
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	/		
	柔性导线 Flexible[mm²]	/		

材料 Material

绝缘材料	Insulation Material	PA66
阻燃等级	Flame retardant rating	UL94V-0
导体材料	Conductor Material	Copper alloy
导体表面镀层	Plating of conductor surface	Sn plated

一般参数 Other Data

间距/极数	Pitch/Poles [mm]/[P]	5.08/2~24
剥线长度	Stripping Length [mm]	/
螺丝/扭矩	Screw/Torque(Max)[N.m]	/
工作温度	Operating temperature[℃]	-40~+105
焊锡温度	Soldering temperature	250℃ /5S
引针尺寸	Pin dimensions [mm]	1.0*1.0
PCB板孔径	PCB Hole Diameter [mm]	∅1.7

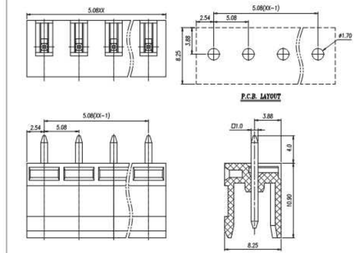



Pitch:5.08mm

DB2ETR-5.08

UL/CUL 技术参数
UL/CUL Technical Data

等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	-
额定电流	Rated Current [A]	10	-	-
接线范围 Wire Range	单芯线 Solid [AWG]	/		
	多芯线 Stranded [AWG]	/		
耐电压	Dielectric Voltage-Withstand	1.6KV		

IEC 技术参数
IEC Technical Data


过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	250	320	400
额定电流	Rated Current [A]	12	12	12
额定冲击电压	Impulse withstand voltage [KV]	4	4	4
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	/		
	柔性导线 Flexible[mm²]	/		

材料 Material

绝缘材料	Insulation Material	PA66
阻燃等级	Flame retardant rating	UL94V-0
导体材料	Conductor Material	Copper alloy
导体表面镀层	Plating of conductor surface	Sn plated

一般参数 Other Data

间距/极数	Pitch/Poles [mm]/[P]	5.08/2~24
剥线长度	Stripping Length [mm]	/
螺丝/扭矩	Screw/Torque(Max)[N.m]	/
工作温度	Operating temperature[℃]	-40~+105
焊锡温度	Soldering temperature	250℃ /5S
引针尺寸	Pin dimensions [mm]	1.0*1.0
PCB板孔径	PCB Hole Diameter [mm]	∅1.7

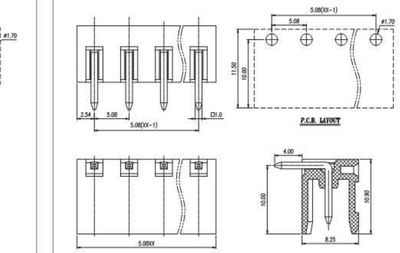




Pitch:7.62mm

DB3EK–7.62

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	30	-	10
接线范围 Wire Range	单芯线 Solid [AWG]	28~10		
	多芯线 Stranded [AWG]	28~10		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	400	630	1000
额定电流	Rated Current [A]	20	20	20
额定冲击电压	Impulse withstand voltage [KV]	6	6	6
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	0.5~4		
	柔性导线 Flexible[mm²]	0.5~4		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	7.62/2~24		
剥线长度	Stripping Length [mm]	8~9		
螺丝/扭矩	Screw/Torque(Max)[N.m]	M3/0.5		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	/		
引针尺寸	Pin dimensions [mm]	/		
PCB板孔径	PCB Hole Diameter [mm]	/		






Pitch:7.62mm

DB3EKM–7.62

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	30	-	10
接线范围 Wire Range	单芯线 Solid [AWG]	28~10		
	多芯线 Stranded [AWG]	28~10		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	400	630	1000
额定电流	Rated Current [A]	20	20	20
额定冲击电压	Impulse withstand voltage [KV]	6	6	6
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	0.5~4		
	柔性导线 Flexible[mm²]	0.5~4		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	7.62/2~24		
剥线长度	Stripping Length [mm]	8~9		
螺丝/扭矩	Screw/Torque(Max)[N.m]	M3/0.5		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	/		
引针尺寸	Pin dimensions [mm]	/		
PCB板孔径	PCB Hole Diameter [mm]	/		

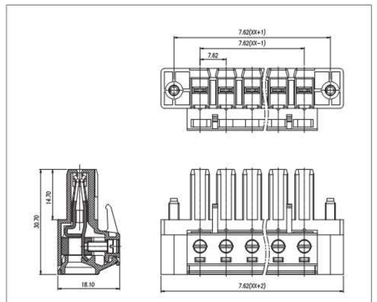




Pitch:7.62mm

DB3EVC–7.62

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	300	300
额定电流	Rated Current [A]	30	30	10
接线范围 Wire Range	单芯线 Solid [AWG]	/		
	多芯线 Stranded [AWG]	/		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	400	630	1000
额定电流	Rated Current [A]	20	20	20
额定冲击电压	Impulse withstand voltage [KV]	6	6	6
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	/		
	柔性导线 Flexible[mm²]	/		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	7.62/2~24		
剥线长度	Stripping Length [mm]	/		
螺丝/扭矩	Screw/Torque(Max)[N.m]	/		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	250℃ /5S		
引针尺寸	Pin dimensions [mm]	0.8*1.0		
PCB板孔径	PCB Hole Diameter [mm]	∅1.5		






Pitch:7.62mm

DB3EVM–7.62

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	300	300
额定电流	Rated Current [A]	30	30	10
接线范围 Wire Range	单芯线 Solid [AWG]	/		
	多芯线 Stranded [AWG]	/		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	400	630	1000
额定电流	Rated Current [A]	20	20	20
额定冲击电压	Impulse withstand voltage [KV]	6	6	6
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	/		
	柔性导线 Flexible[mm²]	/		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	7.62/2~24		
剥线长度	Stripping Length [mm]	/		
螺丝/扭矩	Screw/Torque(Max)[N.m]	/		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	250℃ /5S		
引针尺寸	Pin dimensions [mm]	0.8*1.0		
PCB板孔径	PCB Hole Diameter [mm]	∅1.5		

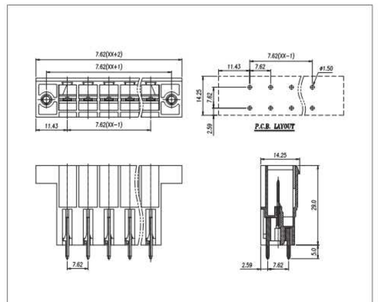




Pitch:7.62mm

DB3EVZM–7.62

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	300	300
额定电流	Rated Current [A]	30	30	10
接线范围 Wire Range	单芯线 Solid [AWG]	/		
	多芯线 Stranded [AWG]	/		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	400	630	1000
额定电流	Rated Current [A]	20	20	20
额定冲击电压	Impulse withstand voltage [KV]	6	6	6
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	/		
	柔性导线 Flexible[mm²]	/		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	7.62/2~24		
剥线长度	Stripping Length [mm]	/		
螺丝/扭矩	Screw/Torque(Max)[N.m]	/		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	250℃ /5S		
引针尺寸	Pin dimensions [mm]	0.8*1.0		
PCB板孔径	PCB Hole Diameter [mm]	∅1.5		

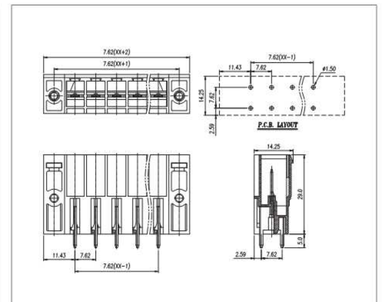




Pitch:7.62mm

DB3ERC–7.62

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	300	300
额定电流	Rated Current [A]	30	30	10
接线范围 Wire Range	单芯线 Solid [AWG]	/		
	多芯线 Stranded [AWG]	/		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	400	630	1000
额定电流	Rated Current [A]	20	20	20
额定冲击电压	Impulse withstand voltage [KV]	6	6	6
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	/		
	柔性导线 Flexible[mm²]	/		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	7.62/2~24		
剥线长度	Stripping Length [mm]	/		
螺丝/扭矩	Screw/Torque(Max)[N.m]	/		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	250℃ /5S		
引针尺寸	Pin dimensions [mm]	0.8*1.0		
PCB板孔径	PCB Hole Diameter [mm]	∅1.5		

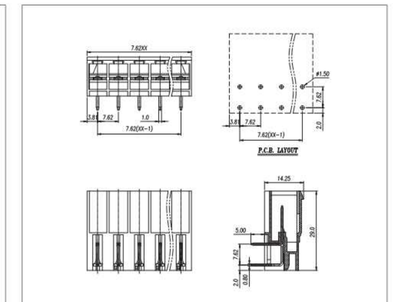



Pitch:7.62mm

DB3ERM-7.62

UL/CUL 技术参数
UL/CUL Technical Data

等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	300	300
额定电流	Rated Current [A]	30	30	10
接线范围 Wire Range	单芯线 Solid [AWG]	/		
	多芯线 Stranded [AWG]	/		
耐电压	Dielectric Voltage-Withstand	1.6KV		

IEC 技术参数
IEC Technical Data


过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	400	630	1000
额定电流	Rated Current [A]	20	20	20
额定冲击电压	Impulse withstand voltage [KV]	6	6	6
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	/		
	柔性导线 Flexible[mm²]	/		

材料 Material

绝缘材料	Insulation Material	PA66
阻燃等级	Flame retardant rating	UL94V-0
导体材料	Conductor Material	Copper alloy
导体表面镀层	Plating of conductor surface	Sn plated

一般参数 Other Data

间距/极数	Pitch/Poles [mm]/[P]	7.62/2~24
剥线长度	Stripping Length [mm]	/
螺丝/扭矩	Screw/Torque(Max)[N.m]	/
工作温度	Operating temperature[℃]	-40~+105
焊锡温度	Soldering temperature	250℃ /5S
引针尺寸	Pin dimensions [mm]	0.8*1.0
PCB板孔径	PCB Hole Diameter [mm]	∅1.5

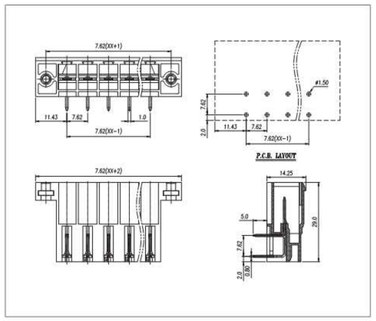



Pitch:7.62mm

DB3ERZM-7.62

UL/CUL 技术参数
UL/CUL Technical Data

等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	300	300
额定电流	Rated Current [A]	30	30	10
接线范围 Wire Range	单芯线 Solid [AWG]	/		
	多芯线 Stranded [AWG]	/		
耐电压	Dielectric Voltage-Withstand	1.6KV		

IEC 技术参数
IEC Technical Data


过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	400	630	1000
额定电流	Rated Current [A]	20	20	20
额定冲击电压	Impulse withstand voltage [KV]	6	6	6
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	/		
	柔性导线 Flexible[mm²]	/		

材料 Material

绝缘材料	Insulation Material	PA66
阻燃等级	Flame retardant rating	UL94V-0
导体材料	Conductor Material	Copper alloy
导体表面镀层	Plating of conductor surface	Sn plated

一般参数 Other Data

间距/极数	Pitch/Poles [mm]/[P]	7.62/2~24
剥线长度	Stripping Length [mm]	/
螺丝/扭矩	Screw/Torque(Max)[N.m]	/
工作温度	Operating temperature[℃]	-40~+105
焊锡温度	Soldering temperature	250℃ /5S
引针尺寸	Pin dimensions [mm]	0.8*1.0
PCB板孔径	PCB Hole Diameter [mm]	∅1.5

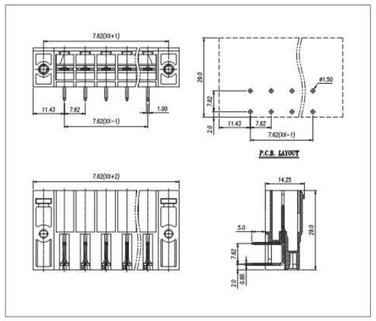



Pitch:7.62mm

DB3ECM-7.62

UL/CUL 技术参数
UL/CUL Technical Data

等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	300	300
额定电流	Rated Current [A]	30	30	10
接线范围 Wire Range	单芯线 Solid [AWG]	/		
	多芯线 Stranded [AWG]	/		
耐电压	Dielectric Voltage-Withstand	1.6KV		

IEC 技术参数
IEC Technical Data


过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	400	400	800
额定电流	Rated Current [A]	15	15	15
额定冲击电压	Impulse withstand voltage [KV]	6	6	6
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	/		
	柔性导线 Flexible[mm²]	/		

材料 Material

绝缘材料	Insulation Material	PA66
阻燃等级	Flame retardant rating	UL94V-0
导体材料	Conductor Material	Copper alloy
导体表面镀层	Plating of conductor surface	Sn plated

一般参数 Other Data

间距/极数	Pitch/Poles [mm]/[P]	7.62/2~24
剥线长度	Stripping Length [mm]	/
螺丝/扭矩	Screw/Torque(Max)[N.m]	/
工作温度	Operating temperature[℃]	-40~+105
焊锡温度	Soldering temperature	250℃ /5S
引针尺寸	Pin dimensions [mm]	/
PCB板孔径	PCB Hole Diameter [mm]	/





Pitch:7.62mm

DB3EKH-7.62

UL/CUL 技术参数
UL/CUL Technical Data

等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	41	-	10
接线范围 Wire Range	单芯线 Solid [AWG]	24~8		
	多芯线 Stranded [AWG]	24~8		
耐电压	Dielectric Voltage-Withstand	1.6KV		

IEC 技术参数
IEC Technical Data


过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	1000	1000	1000
额定电流	Rated Current [A]	41	41	41
额定冲击电压	Impulse withstand voltage [KV]	8	8	6
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	0.2~6		
	柔性导线 Flexible[mm²]	0.2~6		

材料 Material

绝缘材料	Insulation Material	PA66
阻燃等级	Flame retardant rating	UL94V-0
导体材料	Conductor Material	Copper alloy
导体表面镀层	Plating of conductor surface	Sn plated

一般参数 Other Data

间距/极数	Pitch/Poles [mm]/[P]	7.62/2-12
剥线长度	Stripping Length [mm]	10
螺丝/扭矩	Screw/Torque(Max)[N.m]	M3/0.5
工作温度	Operating temperature[℃]	-40~+105
焊锡温度	Soldering temperature	/
引针尺寸	Pin dimensions [mm]	/
PCB板孔径	PCB Hole Diameter [mm]	/

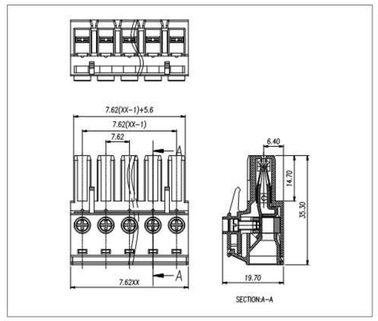



Pitch:7.62mm

DB3EKHM-7.62

UL/CUL 技术参数
UL/CUL Technical Data

等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	41	-	10
接线范围 Wire Range	单芯线 Solid [AWG]	24~8		
	多芯线 Stranded [AWG]	24~8		
耐电压	Dielectric Voltage-Withstand	1.6KV		

IEC 技术参数
IEC Technical Data


过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	1000	1000	1000
额定电流	Rated Current [A]	41	41	41
额定冲击电压	Impulse withstand voltage [KV]	8	8	6
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	0.2~6		
	柔性导线 Flexible[mm²]	0.2~6		

材料 Material

绝缘材料	Insulation Material	PA66
阻燃等级	Flame retardant rating	UL94V-0
导体材料	Conductor Material	Copper alloy
导体表面镀层	Plating of conductor surface	Sn plated

一般参数 Other Data

间距/极数	Pitch/Poles [mm]/[P]	7.62/2-12
剥线长度	Stripping Length [mm]	10
螺丝/扭矩	Screw/Torque(Max)[N.m]	M3/0.5
工作温度	Operating temperature[℃]	-40~+105
焊锡温度	Soldering temperature	/
引针尺寸	Pin dimensions [mm]	/
PCB板孔径	PCB Hole Diameter [mm]	/

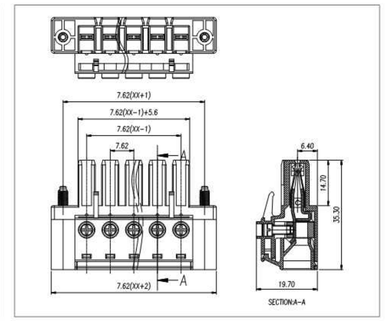



Pitch:7.62mm

DB3EVH-7.62

UL/CUL 技术参数
UL/CUL Technical Data

等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	300	300
额定电流	Rated Current [A]	41	41	10
接线范围 Wire Range	单芯线 Solid [AWG]	/		
	多芯线 Stranded [AWG]	/		
耐电压	Dielectric Voltage-Withstand	1.6KV		

IEC 技术参数
IEC Technical Data


过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	630	630	1000
额定电流	Rated Current [A]	41	41	41
额定冲击电压	Impulse withstand voltage [KV]	6	6	6
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	/		
	柔性导线 Flexible[mm²]	/		

材料 Material

绝缘材料	Insulation Material	PA66
阻燃等级	Flame retardant rating	UL94V-0
导体材料	Conductor Material	Copper alloy
导体表面镀层	Plating of conductor surface	Sn plated

一般参数 Other Data

间距/极数	Pitch/Poles [mm]/[P]	7.62/2-12
剥线长度	Stripping Length [mm]	/
螺丝/扭矩	Screw/Torque(Max)[N.m]	/
工作温度	Operating temperature[℃]	-40~+105
焊锡温度	Soldering temperature	250℃ /5S
引针尺寸	Pin dimensions [mm]	1.0*0.8
PCB板孔径	PCB Hole Diameter [mm]	∅1.6

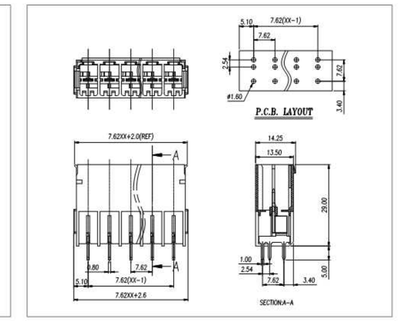





Pitch:7.62mm

DB3ERH–7.62

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	300	300
额定电流	Rated Current [A]	41	41	10
接线范围 Wire Range	单芯线 Solid [AWG]	/		
	多芯线 Stranded [AWG]	/		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	630	630	1000
额定电流	Rated Current [A]	41	41	41
额定冲击电压	Impulse withstand voltage [KV]	6	6	6
导线截面积 Conductor cross section	硬质导线 Solid [mm²]	/		
	柔性导线 Flexible [mm²]	/		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	7.62/2-12		
剥线长度	Stripping Length [mm]	/		
螺丝/扭矩	Screw/Torque(Max)[N.m]	/		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	250℃ /5S		
引针尺寸	Pin dimensions [mm]	1.0*0.8		
PCB板孔径	PCB Hole Diameter [mm]	∅1.6		






Pitch:7.62mm

DB3ERFH–7.62

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	300	300
额定电流	Rated Current [A]	41	41	10
接线范围 Wire Range	单芯线 Solid [AWG]	/		
	多芯线 Stranded [AWG]	/		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	630	630	1000
额定电流	Rated Current [A]	41	41	41
额定冲击电压	Impulse withstand voltage [KV]	6	6	6
导线截面积 Conductor cross section	硬质导线 Solid [mm²]	/		
	柔性导线 Flexible [mm²]	/		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	7.62/2-12		
剥线长度	Stripping Length [mm]	/		
螺丝/扭矩	Screw/Torque(Max)[N.m]	/		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	250℃ /5S		
引针尺寸	Pin dimensions [mm]	1.0*0.8		
PCB板孔径	PCB Hole Diameter [mm]	∅1.6		






Pitch:10.16mm

DB3EK–10.16

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	600	600	600
额定电流	Rated Current [A]	55	55	5
接线范围 Wire Range	单芯线 Solid [AWG]	20~6		
	多芯线 Stranded [AWG]	20~6		
耐电压	Dielectric Voltage-Withstand	2.2KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	1000	1000	1000
额定电流	Rated Current [A]	76	76	76
额定冲击电压	Impulse withstand voltage [KV]	8	8	6
导线截面积 Conductor cross section	硬质导线 Solid [mm²]	0.5~16		
	柔性导线 Flexible [mm²]	0.5~16		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	10.16/2~18		
剥线长度	Stripping Length [mm]	13~14		
螺丝/扭矩	Screw/Torque(Max)[N.m]	M4/1.2		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	/		
引针尺寸	Pin dimensions [mm]	/		
PCB板孔径	PCB Hole Diameter [mm]	/		






Pitch:10.16mm

DB3EKM–10.16

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	600	600	600
额定电流	Rated Current [A]	55	55	5
接线范围 Wire Range	单芯线 Solid [AWG]	20~6		
	多芯线 Stranded [AWG]	20~6		
耐电压	Dielectric Voltage-Withstand	2.2KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	1000	1000	1000
额定电流	Rated Current [A]	76	76	76
额定冲击电压	Impulse withstand voltage [KV]	8	8	6
导线截面积 Conductor cross section	硬质导线 Solid [mm²]	0.5~16		
	柔性导线 Flexible [mm²]	0.5~16		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	10.16/2~16		
剥线长度	Stripping Length [mm]	13-14		
螺丝/扭矩	Screw/Torque(Max)[N.m]	M4/1.2		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	/		
引针尺寸	Pin dimensions [mm]	/		
PCB板孔径	PCB Hole Diameter [mm]	/		

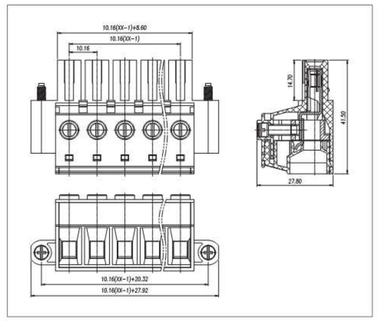




Pitch:10.16mm

DB3EVC–10.16

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	300	300
额定电流	Rated Current [A]	55	55	10
接线范围 Wire Range	单芯线 Solid [AWG]	/		
	多芯线 Stranded [AWG]	/		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	1000	1000	1000
额定电流	Rated Current [A]	76	76	76
额定冲击电压	Impulse withstand voltage [KV]	8	8	6
导线截面积 Conductor cross section	硬质导线 Solid [mm²]	/		
	柔性导线 Flexible [mm²]	/		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	10.16/2~18		
剥线长度	Stripping Length [mm]	/		
螺丝/扭矩	Screw/Torque(Max)[N.m]	/		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	250℃ /5S		
引针尺寸	Pin dimensions [mm]	1.0*1.2		
PCB板孔径	PCB Hole Diameter [mm]	∅1.8		

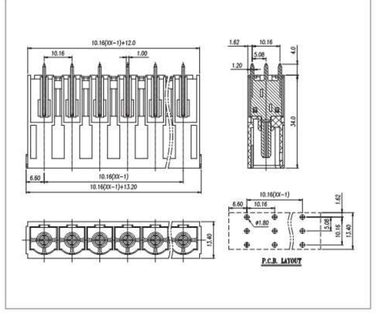





Pitch:10.16mm

DB3ERC–10.16

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	300	300
额定电流	Rated Current [A]	55	55	10
接线范围 Wire Range	单芯线 Solid [AWG]	/		
	多芯线 Stranded [AWG]	/		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	1000	1000	1000
额定电流	Rated Current [A]	76	76	76
额定冲击电压	Impulse withstand voltage [KV]	8	8	6
导线截面积 Conductor cross section	硬质导线 Solid [mm²]	/		
	柔性导线 Flexible [mm²]	/		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	10.16/2~18		
剥线长度	Stripping Length [mm]	/		
螺丝/扭矩	Screw/Torque(Max)[N.m]	/		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	250℃ /5S		
引针尺寸	Pin dimensions [mm]	1.0*1.2		
PCB板孔径	PCB Hole Diameter [mm]	∅1.8		

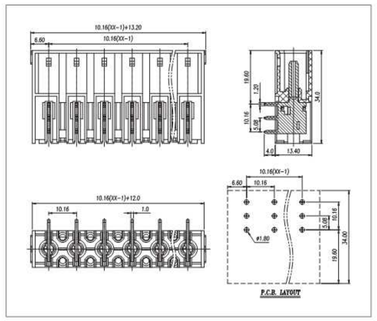



Pitch:10.16mm

DB3ERFC-10.16

UL/CUL 技术参数
UL/CUL Technical Data

等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	300	300
额定电流	Rated Current [A]	55	55	10
接线范围 Wire Range	单芯线 Solid [AWG]	/		
	多芯线 Stranded [AWG]	/		
耐电压	Dielectric Voltage-Withstand	1.6KV		

IEC 技术参数
IEC Technical Data


过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	1000	1000	1000
额定电流	Rated Current [A]	76	76	76
额定冲击电压	Impulse withstand voltage [KV]	8	8	6
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	/		
	柔性导线 Flexible[mm²]	/		


材料 Material

绝缘材料	Insulation Material	PA66
阻燃等级	Flame retardant rating	UL94V-0
导体材料	Conductor Material	Copper alloy
导体表面镀层	Plating of conductor surface	Sn plated

一般参数 Other Data

间距/极数	Pitch/Poles [mm]/[P]	10.16/2~18
剥线长度	Stripping Length [mm]	/
螺丝/扭矩	Screw/Torque(Max)[N.m]	/
工作温度	Operating temperature[℃]	-40~+105
焊锡温度	Soldering temperature	250℃ /5S
引针尺寸	Pin dimensions [mm]	1.0*1.2
PCB板孔径	PCB Hole Diameter [mm]	∅1.8

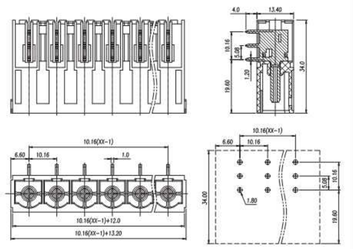



Pitch:10.16mm

DB3EVM-10.16

UL/CUL 技术参数
UL/CUL Technical Data

等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	300	300
额定电流	Rated Current [A]	55	55	10
接线范围 Wire Range	单芯线 Solid [AWG]	/		
	多芯线 Stranded [AWG]	/		
耐电压	Dielectric Voltage-Withstand	1.6KV		

IEC 技术参数
IEC Technical Data


过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	1000	1000	1000
额定电流	Rated Current [A]	76	76	76
额定冲击电压	Impulse withstand voltage [KV]	8	8	6
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	/		
	柔性导线 Flexible[mm²]	/		

材料 Material

绝缘材料	Insulation Material	PA66
阻燃等级	Flame retardant rating	UL94V-0
导体材料	Conductor Material	Copper alloy
导体表面镀层	Plating of conductor surface	Sn plated

一般参数 Other Data

间距/极数	Pitch/Poles [mm]/[P]	10.16/2~16
剥线长度	Stripping Length [mm]	/
螺丝/扭矩	Screw/Torque(Max)[N.m]	/
工作温度	Operating temperature[℃]	-40~+105
焊锡温度	Soldering temperature	250℃ /5S
引针尺寸	Pin dimensions [mm]	1.0*1.2
PCB板孔径	PCB Hole Diameter [mm]	∅1.8

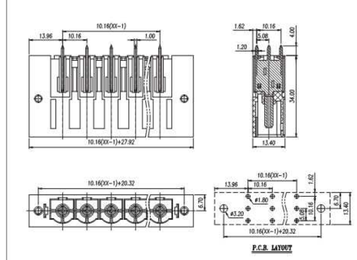



Pitch:10.16mm

DB3ERM-10.16

UL/CUL 技术参数
UL/CUL Technical Data

等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	300	300
额定电流	Rated Current [A]	55	55	10
接线范围 Wire Range	单芯线 Solid [AWG]	/		
	多芯线 Stranded [AWG]	/		
耐电压	Dielectric Voltage-Withstand	1.6KV		

IEC 技术参数
IEC Technical Data


过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	1000	1000	1000
额定电流	Rated Current [A]	76	76	76
额定冲击电压	Impulse withstand voltage [KV]	8	8	6
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	/		
	柔性导线 Flexible[mm²]	/		


材料 Material

绝缘材料	Insulation Material	PA66
阻燃等级	Flame retardant rating	UL94V-0
导体材料	Conductor Material	Copper alloy
导体表面镀层	Plating of conductor surface	Sn plated

一般参数 Other Data

间距/极数	Pitch/Poles [mm]/[P]	10.16/2~16
剥线长度	Stripping Length [mm]	/
螺丝/扭矩	Screw/Torque(Max)[N.m]	/
工作温度	Operating temperature[℃]	-40~+105
焊锡温度	Soldering temperature	250℃ /5S
引针尺寸	Pin dimensions [mm]	1.0*1.2
PCB板孔径	PCB Hole Diameter [mm]	∅1.8



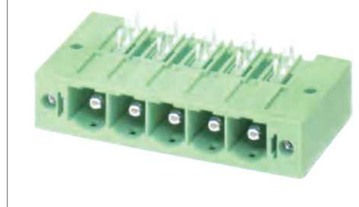

Pitch:10.16mm

DB3ERFM-10.16

UL/CUL 技术参数
UL/CUL Technical Data

等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	300	300
额定电流	Rated Current [A]	55	55	10
接线范围 Wire Range	单芯线 Solid [AWG]	/		
	多芯线 Stranded [AWG]	/		
耐电压	Dielectric Voltage-Withstand	1.6KV		

IEC 技术参数
IEC Technical Data


过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	1000	1000	1000
额定电流	Rated Current [A]	76	76	76
额定冲击电压	Impulse withstand voltage [KV]	8	8	6
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	/		
	柔性导线 Flexible[mm²]	/		

材料 Material

绝缘材料	Insulation Material	PA66
阻燃等级	Flame retardant rating	UL94V-0
导体材料	Conductor Material	Copper alloy
导体表面镀层	Plating of conductor surface	Sn plated

一般参数 Other Data


间距/极数	Pitch/Poles [mm]/[P]	10.16/2~16
剥线长度	Stripping Length [mm]	/
螺丝/扭矩	Screw/Torque(Max)[N.m]	/
工作温度	Operating temperature[℃]	-40~+105
焊锡温度	Soldering temperature	250℃ /5S
引针尺寸	Pin dimensions [mm]	1.0*1.2
PCB板孔径	PCB Hole Diameter [mm]	∅1.8

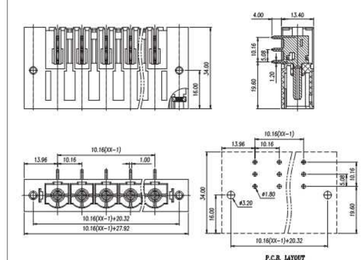





Pitch:5.08mm


DBM01-5.08

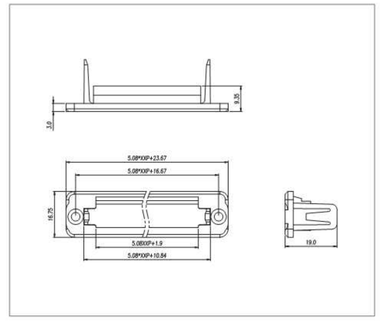

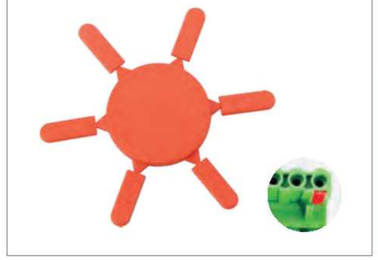


DB2EPWI

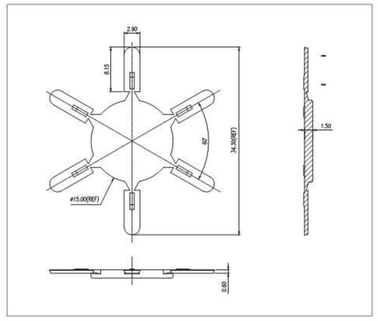


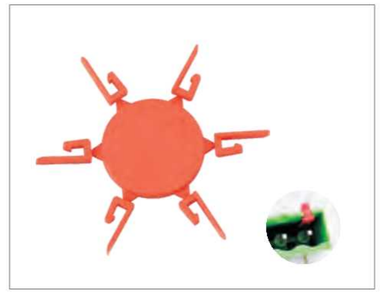


DB2EPWP

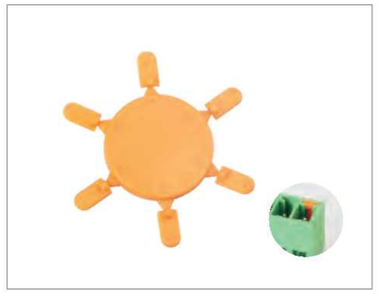


DB1EPWP

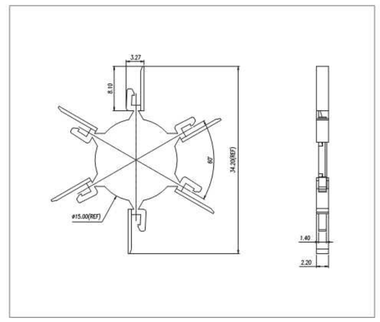

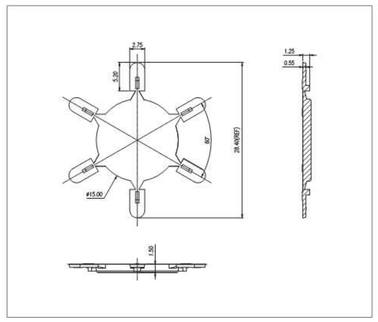


Terminal Block Professional Manufacturer

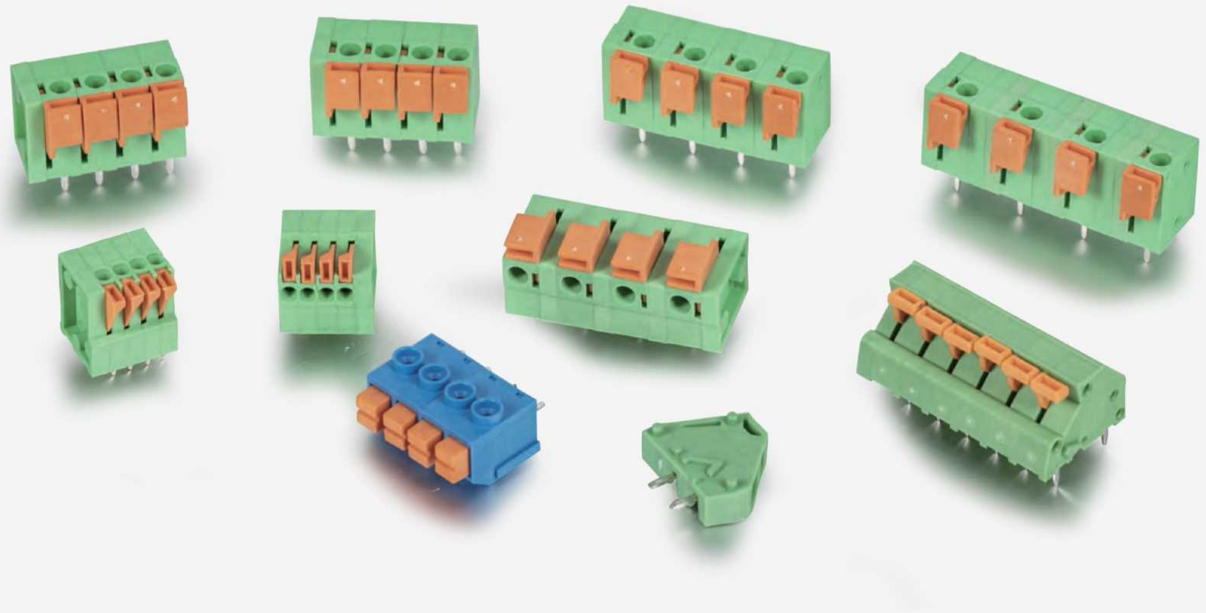

弹簧式PCB接线端子
PCB SPRING TERMINAL BLOCK

弹簧式PCB接线端子，接线方式分笼式弹簧连接和V形弹簧连接，可以连接截面为0.08mm²至16mm²的所有类型的导线，间距2.5mm至10.16mm可供选择，可以同螺钉连接PCB接线端子相互替代使用，增加了灵活性。产品设计符合IEC60998、UL1059、UL486E、CSA C22.2 No.158等国际标准。


PCB Spring terminal blocks, available with two connection methods cage clamp contact and dish clamp contact. Provide the wire size from 0.08mm² to 16mm², Available with different pitches from 2.5mm to 10.16 mm. It can be used instead of printed circuit universal screw terminal blocks, more flexible. The product is designed in accordance with IEC 60998, UL1059, CSA C22.2 NO.158 standards.



Pitch:2.54mm

DB141V–2.54

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	150	-	-
额定电流	Rated Current [A]	4	-	-
接线范围 Wire Range	单芯线 Solid [AWG]	26~18		
	多芯线 Stranded [AWG]	26~18		
耐电压	Dielectric Voltage-Withstand	1.3KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	63	160	320
额定电流	Rated Current [A]	6	6	6
额定冲击电压	Impulse withstand voltage [KV]	2.5	2.5	2.5
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	0.2~0.5		
	柔性导线 Flexible[mm²]	0.2~0.5		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn Plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	2.54/1~30		
剥线长度	Stripping Length [mm]	11		
螺丝/扭矩	Screw/Torque(Max)[N.m]	/		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	250℃/5S		
引针尺寸	Pin dimensions [mm]	0.7*0.5		
PCB板孔径	PCB Hole Diameter [mm]	∅1.2		

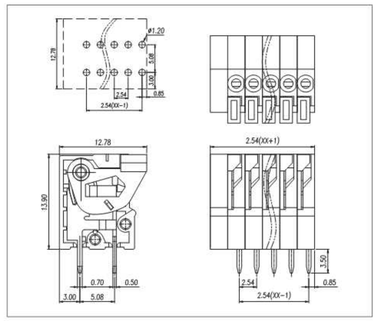





Pitch:2.54mm

DB141R–2.54

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	150	-	-
额定电流	Rated Current [A]	4	-	-
接线范围 Wire Range	单芯线 Solid [AWG]	26~18		
	多芯线 Stranded [AWG]	26~18		
耐电压	Dielectric Voltage-Withstand	1.3KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	63	160	320
额定电流	Rated Current [A]	6	6	6
额定冲击电压	Impulse withstand voltage [KV]	2.5	2.5	2.5
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	0.2~0.5		
	柔性导线 Flexible[mm²]	0.2~0.5		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn Plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	2.54/1~30		
剥线长度	Stripping Length [mm]	11		
螺丝/扭矩	Screw/Torque(Max)[N.m]	/		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	250℃/5S		
引针尺寸	Pin dimensions [mm]	0.8*0.5		
PCB板孔径	PCB Hole Diameter [mm]	∅1.1		

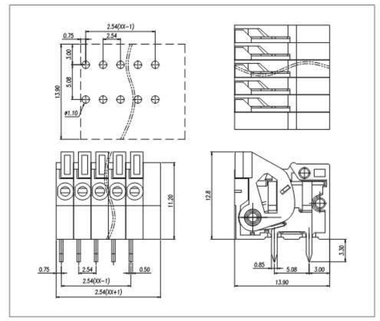




Pitch:5.0/5.08mm

DB142V–5.08

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	10	-	10
接线范围 Wire Range	单芯线 Solid [AWG]	24~14		
	多芯线 Stranded [AWG]	24~14		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	320	320	630
额定电流	Rated Current [A]	15	15	15
额定冲击电压	Impulse withstand voltage [KV]	4	4	4
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	0.2~1.5		
	柔性导线 Flexible[mm²]	0.2~1.5		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	5.0,5.08/1~30		
剥线长度	Stripping Length [mm]	10		
螺丝/扭矩	Screw/Torque(Max)[N.m]	/		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	250℃ /5S		
引针尺寸	Pin dimensions [mm]	1.0*0.5		
PCB板孔径	PCB Hole Diameter [mm]	∅1.4		

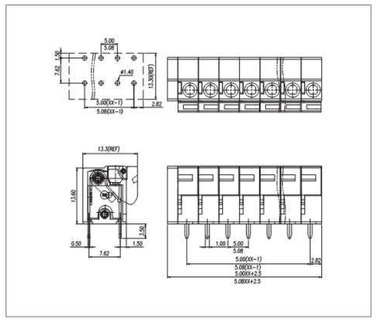




Pitch:7.5/7.62mm

DB142V−7.62

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	10	-	10
接线范围 Wire Range	单芯线 Solid [AWG]	24~14		
	多芯线 Stranded [AWG]	24~14		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	500	630	1000
额定电流	Rated Current [A]	15	15	15
额定冲击电压	Impulse withstand voltage [KV]	6	6	6
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	0.2~1.5		
	柔性导线 Flexible[mm²]	0.2~1.5		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	7.5,7.62/2~24		
剥线长度	Stripping Length [mm]	10		
螺丝/扭矩	Screw/Torque(Max)[N.m]	/		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	250℃ /5S		
引针尺寸	Pin dimensions [mm]	1.0*0.5		
PCB板孔径	PCB Hole Diameter [mm]	∅1.4		






Pitch:5.0/5.08mm

DB142R−5.08

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	10	-	10
接线范围 Wire Range	单芯线 Solid [AWG]	24~14		
	多芯线 Stranded [AWG]	24~14		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	320	320	630
额定电流	Rated Current [A]	15	15	15
额定冲击电压	Impulse withstand voltage [KV]	4	4	4
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	0.2~1.5		
	柔性导线 Flexible[mm²]	0.2~1.5		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	5.0,5.08/1~30		
剥线长度	Stripping Length [mm]	10~11		
螺丝/扭矩	Screw/Torque(Max)[N.m]	/		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	250℃ /5S		
引针尺寸	Pin dimensions [mm]	1.0*0.5		
PCB板孔径	PCB Hole Diameter [mm]	∅1.4		






Pitch:7.5/7.62mm

DB142R−7.62

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	10	-	10
接线范围 Wire Range	单芯线 Solid [AWG]	24~14		
	多芯线 Stranded [AWG]	24~14		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	500	630	1000
额定电流	Rated Current [A]	15	15	15
额定冲击电压	Impulse withstand voltage [KV]	6	6	6
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	0.2~1.5		
	柔性导线 Flexible[mm²]	0.2~1.5		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	7.5,7.62/2~24		
剥线长度	Stripping Length [mm]	10~11		
螺丝/扭矩	Screw/Torque(Max)[N.m]	/		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	250℃ /5S		
引针尺寸	Pin dimensions [mm]	1.0*0.5		
PCB板孔径	PCB Hole Diameter [mm]	∅1.4		

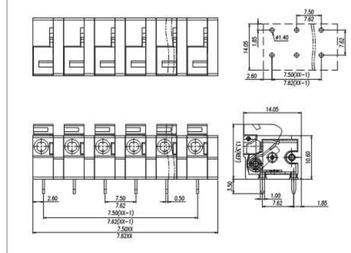





Pitch:2.5mm

DB500V−2.5

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	150	-	-
额定电流	Rated Current [A]	5	-	-
接线范围 Wire Range	单芯线 Solid [AWG]	26~18		
	多芯线 Stranded [AWG]	26~18		
耐电压	Dielectric Voltage-Withstand	1.3KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	63	160	320
额定电流	Rated Current [A]	6	6	6
额定冲击电压	Impulse withstand voltage [KV]	2.5	2.5	2.5
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	0.2~0.5		
	柔性导线 Flexible[mm²]	0.2~0.5		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn Plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	2.5/1-30		
剥线长度	Stripping Length [mm]	11~12		
螺丝/扭矩	Screw/Torque(Max)[N.m]	/		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	250℃/5S		
引针尺寸	Pin dimensions [mm]	0.7*0.4		
PCB板孔径	PCB Hole Diameter [mm]	∅1.0		

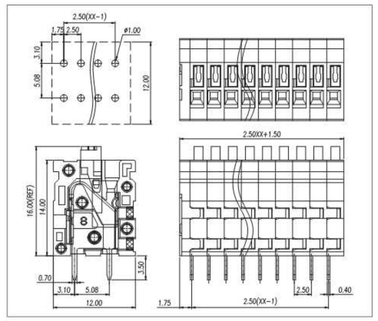




Pitch:2.54mm

DB500V−2.54

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	150	-	-
额定电流	Rated Current [A]	5	-	-
接线范围 Wire Range	单芯线 Solid [AWG]	26~18		
	多芯线 Stranded [AWG]	26~18		
耐电压	Dielectric Voltage-Withstand	1.3KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	63	160	320
额定电流	Rated Current [A]	6	6	6
额定冲击电压	Impulse withstand voltage [KV]	2.5	2.5	2.5
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	0.2~0.5		
	柔性导线 Flexible[mm²]	0.2~0.5		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	2.54/2~30		
剥线长度	Stripping Length [mm]	11~12		
螺丝/扭矩	Screw/Torque(Max)[N.m]	/		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	250℃ /5S		
引针尺寸	Pin dimensions [mm]	0.7*0.4		
PCB板孔径	PCB Hole Diameter [mm]	∅1.0		







Pitch:2.5mm

DB500R−2.5

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	150	-	-
额定电流	Rated Current [A]	5	-	-
接线范围 Wire Range	单芯线 Solid [AWG]	26~18		
	多芯线 Stranded [AWG]	26~18		
耐电压	Dielectric Voltage-Withstand	1.3KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	63	160	320
额定电流	Rated Current [A]	6	6	6
额定冲击电压	Impulse withstand voltage [KV]	2.5	2.5	2.5
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	0.2~0.5		
	柔性导线 Flexible[mm²]	0.2~0.5		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	2.5/1~30		
剥线长度	Stripping Length [mm]	11~12		
螺丝/扭矩	Screw/Torque(Max)[N.m]	/		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	250℃ /5S		
引针尺寸	Pin dimensions [mm]	0.7*0.4		
PCB板孔径	PCB Hole Diameter [mm]	∅1.0		

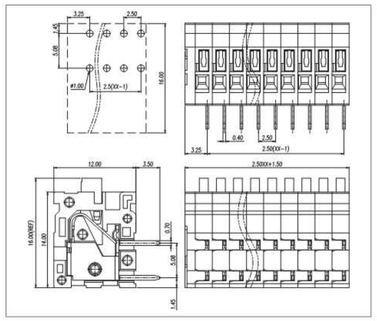



Pitch:2.54mm

DB500R-2.54

UL/CUL 技术参数 UL/CUL Technical Data

等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	150	-	-
额定电流	Rated Current [A]	5	-	-
接线范围 Wire Range	单芯线 Solid [AWG]	26~18		
	多芯线 Stranded [AWG]	26~18		
耐电压	Dielectric Voltage-Withstand	1.3KV		

IEC 技术参数 IEC Technical Data


过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	63	160	320
额定电流	Rated Current [A]	6	6	6
额定冲击电压	Impulse withstand voltage [KV]	2.5	2.5	2.5
导线截面积 Conductor cross section	硬质导线 Solid [mm²]	0.2~0.5		
	柔性导线 Flexible [mm²]	0.2~0.5		

材料 Material

绝缘材料	Insulation Material	PA66
阻燃等级	Flame retardant rating	UL94V-0
导体材料	Conductor Material	Copper alloy
导体表面镀层	Plating of conductor surface	Sn plated

一般参数 Other Data

间距/极数	Pitch/Poles [mm]/[P]	2.54/2~30
剥线长度	Stripping Length [mm]	11~12
螺丝/扭矩	Screw/Torque(Max)[N.m]	/
工作温度	Operating temperature[℃]	-40~+105
焊锡温度	Soldering temperature	250℃ /5S
引针尺寸	Pin dimensions [mm]	0.7*0.4
PCB板孔径	PCB Hole Diameter [mm]	∅1.0





Pitch:5.0mm

DB500V-5.0

UL/CUL 技术参数 UL/CUL Technical Data

等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	-
额定电流	Rated Current [A]	10	-	-
接线范围 Wire Range	单芯线 Solid [AWG]	26~16		
	多芯线 Stranded [AWG]	26~16		
耐电压	Dielectric Voltage-Withstand	1.6KV		

IEC 技术参数 IEC Technical Data


过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	320	320	630
额定电流	Rated Current [A]	17.5	17.5	17.5
额定冲击电压	Impulse withstand voltage [KV]	4	4	4
导线截面积 Conductor cross section	硬质导线 Solid [mm²]	0.2~1.5		
	柔性导线 Flexible [mm²]	0.2~1.5		


材料 Material

绝缘材料	Insulation Material	PA66
阻燃等级	Flame retardant rating	UL94V-0
导体材料	Conductor Material	Copper alloy
导体表面镀层	Plating of conductor surface	Sn plated

一般参数 Other Data

间距/极数	Pitch/Poles [mm]/[P]	5.0/1~30
剥线长度	Stripping Length [mm]	11~12
螺丝/扭矩	Screw/Torque(Max)[N.m]	/
工作温度	Operating temperature[℃]	-40~+105
焊锡温度	Soldering temperature	250℃ /5S
引针尺寸	Pin dimensions [mm]	0.9*0.6
PCB板孔径	PCB Hole Diameter [mm]	∅1.3

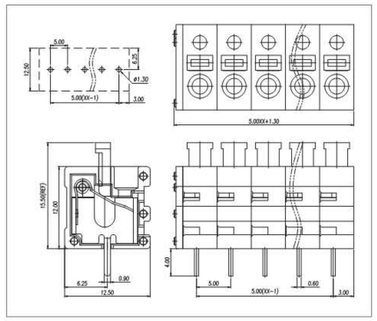



Pitch:5.0mm

DB500R-5.0

UL/CUL 技术参数 UL/CUL Technical Data

等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	-
额定电流	Rated Current [A]	10	-	-
接线范围 Wire Range	单芯线 Solid [AWG]	26~16		
	多芯线 Stranded [AWG]	26~16		
耐电压	Dielectric Voltage-Withstand	1.6KV		

IEC 技术参数 IEC Technical Data


过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	320	320	630
额定电流	Rated Current [A]	17.5	17.5	17.5
额定冲击电压	Impulse withstand voltage [KV]	4	4	4
导线截面积 Conductor cross section	硬质导线 Solid [mm²]	0.2~1.5		
	柔性导线 Flexible [mm²]	0.2~1.5		

材料 Material

绝缘材料	Insulation Material	PA66
阻燃等级	Flame retardant rating	UL94V-0
导体材料	Conductor Material	Copper alloy
导体表面镀层	Plating of conductor surface	Sn plated

一般参数 Other Data

间距/极数	Pitch/Poles [mm]/[P]	5.0/1~30
剥线长度	Stripping Length [mm]	11~12
螺丝/扭矩	Screw/Torque(Max)[N.m]	/
工作温度	Operating temperature[℃]	-40~+105
焊锡温度	Soldering temperature	250℃ /5S
引针尺寸	Pin dimensions [mm]	0.9*0.6
PCB板孔径	PCB Hole Diameter [mm]	∅1.3

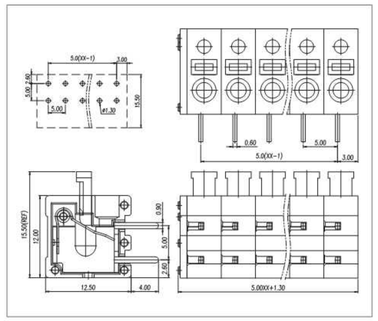



Pitch:3.5mm

DB212S-3.5

UL/CUL 技术参数 UL/CUL Technical Data

等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	10	-	10
接线范围 Wire Range	单芯线 Solid [AWG]	24~16		
	多芯线 Stranded [AWG]	24~16		
耐电压	Dielectric Voltage-Withstand	1.6KV		

IEC 技术参数 IEC Technical Data


过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	160	160	320
额定电流	Rated Current [A]	17.5	17.5	17.5
额定冲击电压	Impulse withstand voltage [KV]	2.5	2.5	2.5
导线截面积 Conductor cross section	硬质导线 Solid [mm²]	0.2~1.5		
	柔性导线 Flexible [mm²]	0.2~1.5		

材料 Material

绝缘材料	Insulation Material	LCP
阻燃等级	Flame retardant rating	UL94V-0
导体材料	Conductor Material	Copper alloy
导体表面镀层	Plating of conductor surface	Sn Plated

一般参数 Other Data

间距/极数	Pitch/Poles [mm]/[P]	3.5/2~24
剥线长度	Stripping Length [mm]	7~8
螺丝/扭矩	Screw/Torque(Max)[N.m]	/
工作温度	Operating temperature[℃]	-40~+130
焊锡温度	Soldering temperature	285℃ /10S
引针尺寸	Pin dimensions [mm]	0.8*0.4
PCB板孔径	PCB Hole Diameter [mm]	∅1.2

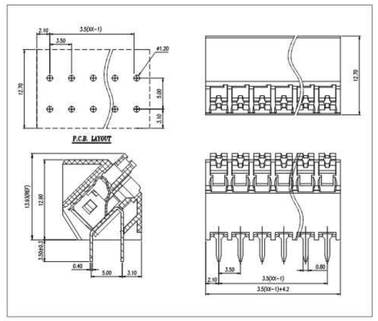



Pitch:5.0mm

DB212S-5.0

UL/CUL 技术参数 UL/CUL Technical Data

等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	10	-	10
接线范围 Wire Range	单芯线 Solid [AWG]	24~16		
	多芯线 Stranded [AWG]	24~16		
耐电压	Dielectric Voltage-Withstand	1.6KV		

IEC 技术参数 IEC Technical Data


过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	250	320	500
额定电流	Rated Current [A]	17.5	17.5	17.5
额定冲击电压	Impulse withstand voltage [KV]	4	4	4
导线截面积 Conductor cross section	硬质导线 Solid [mm²]	0.2~1.5		
	柔性导线 Flexible [mm²]	0.2~1.5		


材料 Material

绝缘材料	Insulation Material	LCP
阻燃等级	Flame retardant rating	UL94V-0
导体材料	Conductor Material	Copper alloy
导体表面镀层	Plating of conductor surface	Sn plated

一般参数 Other Data

间距/极数	Pitch/Poles [mm]/[P]	5.0/2~24
剥线长度	Stripping Length [mm]	7~8
螺丝/扭矩	Screw/Torque(Max)[N.m]	/
工作温度	Operating temperature[℃]	-40~+130
焊锡温度	Soldering temperature	285℃ /10S
引针尺寸	Pin dimensions [mm]	0.8*0.4
PCB板孔径	PCB Hole Diameter [mm]	∅1.2

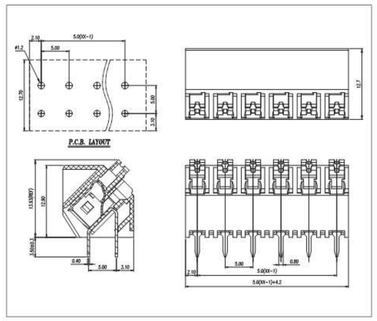

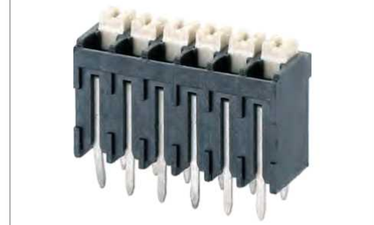

Pitch:3.5mm

DB212V-3.5

UL/CUL 技术参数 UL/CUL Technical Data

等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	10	-	10
接线范围 Wire Range	单芯线 Solid [AWG]	24~16		
	多芯线 Stranded [AWG]	24~16		
耐电压	Dielectric Voltage-Withstand	1.6KV		

IEC 技术参数 IEC Technical Data


过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	160	160	320
额定电流	Rated Current [A]	17.5	17.5	17.5
额定冲击电压	Impulse withstand voltage [KV]	2.5	2.5	2.5
导线截面积 Conductor cross section	硬质导线 Solid [mm²]	0.2~1.5		
	柔性导线 Flexible [mm²]	0.2~1.5		


材料 Material

绝缘材料	Insulation Material	LCP
阻燃等级	Flame retardant rating	UL94V-0
导体材料	Conductor Material	Copper alloy
导体表面镀层	Plating of conductor surface	Sn plated

一般参数 Other Data

间距/极数	Pitch/Poles [mm]/[P]	3.5/2~24
剥线长度	Stripping Length [mm]	7~8
螺丝/扭矩	Screw/Torque(Max)[N.m]	/
工作温度	Operating temperature[℃]	-40~+130
焊锡温度	Soldering temperature	285℃ /10S
引针尺寸	Pin dimensions [mm]	0.8*0.4
PCB板孔径	PCB Hole Diameter [mm]	∅1.2

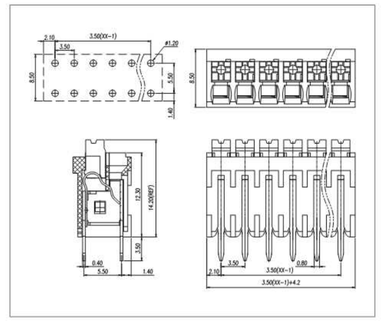





Pitch:3.5mm

DB212R-3.5

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	10	-	10
接线范围 Wire Range	单芯线 Solid [AWG]	24~16		
	多芯线 Stranded [AWG]	24~16		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	160	160	320
额定电流	Rated Current [A]	17.5	17.5	17.5
额定冲击电压	Impulse withstand voltage [KV]	2.5	2.5	2.5
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	0.2~1.5		
	柔性导线 Flexible[mm²]	0.2~1.5		
材料 Material				
绝缘材料	Insulation Material	LCP		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	3.5/2~24		
剥线长度	Stripping Length [mm]	7~8		
螺丝/扭矩	Screw/Torque(Max)[N.m]	/		
工作温度	Operating temperature[℃]	-40~+130		
焊锡温度	Soldering temperature	285℃ /10S		
引针尺寸	Pin dimensions [mm]	0.8*0.4		
PCB板孔径	PCB Hole Diameter [mm]	∅1.2		

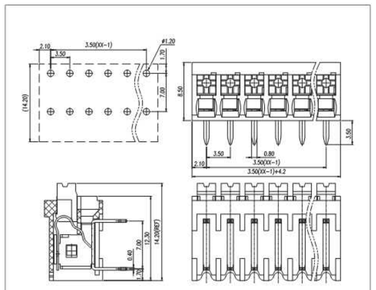




Pitch:3.5mm

DB212VS-3.5

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	10	-	10
接线范围 Wire Range	单芯线 Solid [AWG]	24~16		
	多芯线 Stranded [AWG]	24~16		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	160	160	320
额定电流	Rated Current [A]	17.5	17.5	17.5
额定冲击电压	Impulse withstand voltage [KV]	2.5	2.5	2.5
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	0.2~1.5		
	柔性导线 Flexible[mm²]	0.2~1.5		
材料 Material				
绝缘材料	Insulation Material	LCP		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	3.5/2~24		
剥线长度	Stripping Length [mm]	7~8		
螺丝/扭矩	Screw/Torque(Max)[N.m]	/		
工作温度	Operating temperature[℃]	-40~+130		
焊锡温度	Soldering temperature	285℃ /10S		
引针尺寸	Pin dimensions [mm]	0.8*0.4		
PCB板孔径	PCB Hole Diameter [mm]	/		

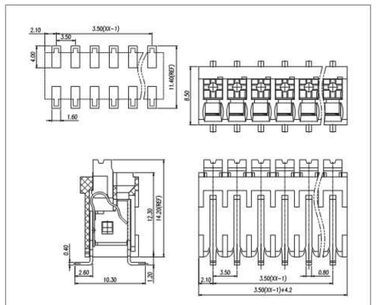





Pitch:3.5mm

DB212RS-3.5

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	10	-	10
接线范围 Wire Range	单芯线 Solid [AWG]	24~16		
	多芯线 Stranded [AWG]	24~16		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	160	160	320
额定电流	Rated Current [A]	17.5	17.5	17.5
额定冲击电压	Impulse withstand voltage [KV]	2.5	2.5	2.5
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	0.2~1.5		
	柔性导线 Flexible[mm²]	0.2~1.5		
材料 Material				
绝缘材料	Insulation Material	LCP		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	3.5/2~24		
剥线长度	Stripping Length [mm]	7~8		
螺丝/扭矩	Screw/Torque(Max)[N.m]	/		
工作温度	Operating temperature[℃]	-40~+130		
焊锡温度	Soldering temperature	285℃ /10S		
引针尺寸	Pin dimensions [mm]	0.8*0.4		
PCB板孔径	PCB Hole Diameter [mm]	/		

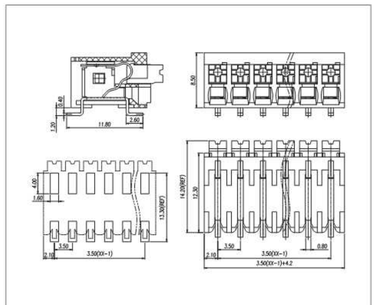





Pitch:5.0mm

DB212V-5.0

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	10	-	10
接线范围 Wire Range	单芯线 Solid [AWG]	24~16		
	多芯线 Stranded [AWG]	24~16		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	250	320	500
额定电流	Rated Current [A]	17.5	17.5	17.5
额定冲击电压	Impulse withstand voltage [KV]	4	4	4
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	0.2~1.5		
	柔性导线 Flexible[mm²]	0.2~1.5		
材料 Material				
绝缘材料	Insulation Material	LCP		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	5.0/2~24		
剥线长度	Stripping Length [mm]	7~8		
螺丝/扭矩	Screw/Torque(Max)[N.m]	/		
工作温度	Operating temperature[℃]	-40~+130		
焊锡温度	Soldering temperature	285℃ /10S		
引针尺寸	Pin dimensions [mm]	0.8*0.4		
PCB板孔径	PCB Hole Diameter [mm]	∅1.2		






Pitch:5.0mm

DB212R-5.0

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	10	-	10
接线范围 Wire Range	单芯线 Solid [AWG]	24~16		
	多芯线 Stranded [AWG]	24~16		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	250	320	500
额定电流	Rated Current [A]	17.5	17.5	17.5
额定冲击电压	Impulse withstand voltage [KV]	4	4	4
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	0.2~1.5		
	柔性导线 Flexible[mm²]	0.2~1.5		
材料 Material				
绝缘材料	Insulation Material	LCP		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	5.0/2~24		
剥线长度	Stripping Length [mm]	7~8		
螺丝/扭矩	Screw/Torque(Max)[N.m]	/		
工作温度	Operating temperature[℃]	-40~+130		
焊锡温度	Soldering temperature	285℃ /10S		
引针尺寸	Pin dimensions [mm]	0.8*0.4		
PCB板孔径	PCB Hole Diameter [mm]	∅1.2		






Pitch:5.0mm

DB212VS-5.0

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	10	-	10
接线范围 Wire Range	单芯线 Solid [AWG]	24~16		
	多芯线 Stranded [AWG]	24~16		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	250	320	500
额定电流	Rated Current [A]	17.5	17.5	17.5
额定冲击电压	Impulse withstand voltage [KV]	4	4	4
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	0.2~1.5		
	柔性导线 Flexible[mm²]	0.2~1.5		
材料 Material				
绝缘材料	Insulation Material	LCP		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	5.0/2~24		
剥线长度	Stripping Length [mm]	7~8		
螺丝/扭矩	Screw/Torque(Max)[N.m]	/		
工作温度	Operating temperature[℃]	-40~+130		
焊锡温度	Soldering temperature	285℃ /10S		
引针尺寸	Pin dimensions [mm]	0.8*0.4		
PCB板孔径	PCB Hole Diameter [mm]	/		

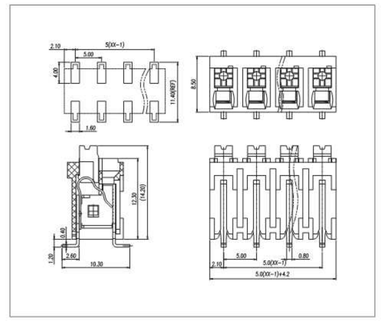




Pitch:5.0mm

DB212RS-5.0

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	10	-	10
接线范围 Wire Range	单芯线 Solid [AWG]	24~16		
	多芯线 Stranded [AWG]	24~16		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	250	320	500
额定电流	Rated Current [A]	17.5	17.5	17.5
额定冲击电压	Impulse withstand voltage [KV]	4	4	4
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	0.2~1.5		
	柔性导线 Flexible[mm²]	0.2~1.5		
材料 Material				
绝缘材料	Insulation Material	LCP		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	5.0/2~24		
剥线长度	Stripping Length [mm]	7~8		
螺丝/扭矩	Screw/Torque(Max)[N.m]	/		
工作温度	Operating temperature[℃]	-40~+130		
焊锡温度	Soldering temperature	285℃ /10S		
引针尺寸	Pin dimensions [mm]	0.8*0.4		
PCB板孔径	PCB Hole Diameter [mm]	/		






Pitch:2.5/2.54mm

DB213A-2.5/2.54

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	150	-	-
额定电流	Rated Current [A]	4	-	-
接线范围 Wire Range	单芯线 Solid [AWG]	28~20		
	多芯线 Stranded [AWG]	28~20		
耐电压	Dielectric Voltage-Withstand	1.3KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	63	160	320
额定电流	Rated Current [A]	6	6	6
额定冲击电压	Impulse withstand voltage [KV]	2.5	2.5	2.5
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	0.2~0.5		
	柔性导线 Flexible[mm²]	0.2~0.5		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	2.5,2.54/1~30		
剥线长度	Stripping Length [mm]	5~6		
螺丝/扭矩	Screw/Torque(Max)[N.m]	/		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	250℃ /5S		
引针尺寸	Pin dimensions [mm]	0.75*0.5		
PCB板孔径	PCB Hole Diameter [mm]	∅1.2		







Pitch:2.5/2.54mm

DB213B-2.5/2.54

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	150	-	-
额定电流	Rated Current [A]	4	-	-
接线范围 Wire Range	单芯线 Solid [AWG]	28~20		
	多芯线 Stranded [AWG]	28~20		
耐电压	Dielectric Voltage-Withstand	1.3KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	63	160	320
额定电流	Rated Current [A]	6	6	6
额定冲击电压	Impulse withstand voltage [KV]	2.5	2.5	2.5
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	0.2~0.5		
	柔性导线 Flexible[mm²]	0.2~0.5		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	2.5,2.54/1~30		
剥线长度	Stripping Length [mm]	5~6		
螺丝/扭矩	Screw/Torque(Max)[N.m]	/		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	250℃ /5S		
引针尺寸	Pin dimensions [mm]	0.75*0.5		
PCB板孔径	PCB Hole Diameter [mm]	∅1.2		






Pitch:3.81mm

DB260-3.81

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	5	-	5
接线范围 Wire Range	单芯线 Solid [AWG]	22~18		
	多芯线 Stranded [AWG]	22~18		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	200	320	500
额定电流	Rated Current [A]	17.5	17.5	17.5
额定冲击电压	Impulse withstand voltage [KV]	4	4	4
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	0.5~1.5		
	柔性导线 Flexible[mm²]	0.75~1.5		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	3.81/1~30		
剥线长度	Stripping Length [mm]	9~10		
螺丝/扭矩	Screw/Torque(Max)[N.m]	/		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	250℃ /5S		
引针尺寸	Pin dimensions [mm]	0.8*0.4		
PCB板孔径	PCB Hole Diameter [mm]	∅1.2		

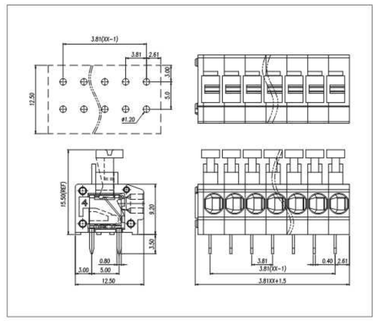




Pitch:3.81mm

DB260W-3.81

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	5	-	5
接线范围 Wire Range	单芯线 Solid [AWG]	22~18		
	多芯线 Stranded [AWG]	22~18		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	200	320	500
额定电流	Rated Current [A]	17.5	17.5	17.5
额定冲击电压	Impulse withstand voltage [KV]	4	4	4
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	0.5~1.5		
	柔性导线 Flexible[mm²]	0.75~1.5		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	3.81/1~30		
剥线长度	Stripping Length [mm]	9~10		
螺丝/扭矩	Screw/Torque(Max)[N.m]	/		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	250℃ /5S		
引针尺寸	Pin dimensions [mm]	0.8*0.4		
PCB板孔径	PCB Hole Diameter [mm]	∅1.2		

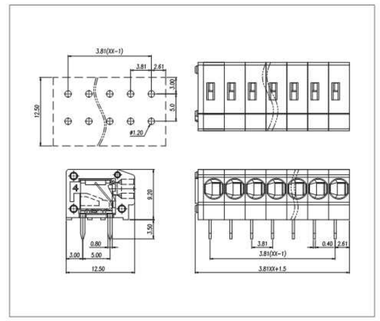





Pitch:5.0mm

DB260-5.0

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	5	-	5
接线范围 Wire Range	单芯线 Solid [AWG]	22~18		
	多芯线 Stranded [AWG]	22~18		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	250	320	630
额定电流	Rated Current [A]	17.5	17.5	17.5
额定冲击电压	Impulse withstand voltage [KV]	4	4	4
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	0.5~1.5		
	柔性导线 Flexible[mm²]	0.75~1.5		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	5.0/1~30		
剥线长度	Stripping Length [mm]	9~10		
螺丝/扭矩	Screw/Torque(Max)[N.m]	/		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	250℃ /5S		
引针尺寸	Pin dimensions [mm]	0.8*0.4		
PCB板孔径	PCB Hole Diameter [mm]	∅1.2		

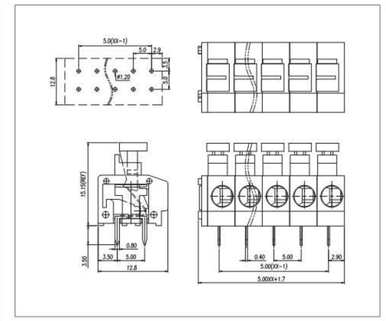


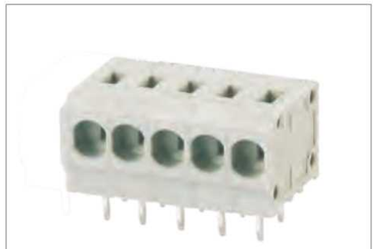


Pitch:5.0mm

DB260W-5.0

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	5	-	5
接线范围 Wire Range	单芯线 Solid [AWG]	22~18		
	多芯线 Stranded [AWG]	22~18		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	250	320	630
额定电流	Rated Current [A]	17.5	17.5	17.5
额定冲击电压	Impulse withstand voltage [KV]	4	4	4
导线截面积 Conductor cross section	硬质导线 Solid [mm²]	0.5~1.5		
	柔性导线 Flexible [mm²]	0.75~1.5		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	5.0/1~30		
剥线长度	Stripping Length [mm]	9~10		
螺丝/扭矩	Screw/Torque(Max)[N.m]	/		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	250℃ /5S		
引针尺寸	Pin dimensions [mm]	0.8*0.4		
PCB板孔径	PCB Hole Diameter [mm]	∅1.2		






Pitch:3.81mm

DB236-3.81

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	10	-	10
接线范围 Wire Range	单芯线 Solid [AWG]	20~16		
	多芯线 Stranded [AWG]	20~16		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	250	320	630
额定电流	Rated Current [A]	10	10	10
额定冲击电压	Impulse withstand voltage [KV]	4	4	4
导线截面积 Conductor cross section	硬质导线 Solid [mm²]	0.5~1.5		
	柔性导线 Flexible [mm²]	0.5~1.5		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	3.81/1~24		
剥线长度	Stripping Length [mm]	8~9		
螺丝/扭矩	Screw/Torque(Max)[N.m]	/		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	250℃ /5S		
引针尺寸	Pin dimensions [mm]	0.8*0.5		
PCB板孔径	PCB Hole Diameter [mm]	∅1.1		

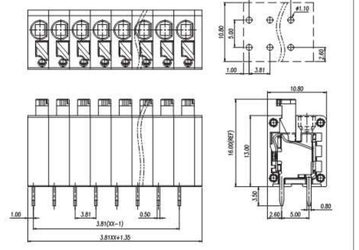




Pitch:5.0mm

DB236-5.0

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	10	-	10
接线范围 Wire Range	单芯线 Solid [AWG]	20~16		
	多芯线 Stranded [AWG]	20~16		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	320	320	630
额定电流	Rated Current [A]	10	10	10
额定冲击电压	Impulse withstand voltage [KV]	4	4	4
导线截面积 Conductor cross section	硬质导线 Solid [mm²]	0.5~1.5		
	柔性导线 Flexible [mm²]	0.5~1.5		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	5.0/1~24		
剥线长度	Stripping Length [mm]	8~9		
螺丝/扭矩	Screw/Torque(Max)[N.m]	/		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	250℃ /5S		
引针尺寸	Pin dimensions [mm]	0.8*0.5		
PCB板孔径	PCB Hole Diameter [mm]	∅1.1		

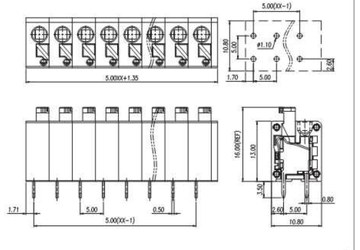




Pitch:7.5mm

DB236-7.5

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	10	-	10
接线范围 Wire Range	单芯线 Solid [AWG]	20~16		
	多芯线 Stranded [AWG]	20~16		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	320	320	630
额定电流	Rated Current [A]	10	10	10
额定冲击电压	Impulse withstand voltage [KV]	4	4	4
导线截面积 Conductor cross section	硬质导线 Solid [mm²]	0.5~1.5		
	柔性导线 Flexible [mm²]	0.5~1.5		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	7.5/1~24		
剥线长度	Stripping Length [mm]	8~9		
螺丝/扭矩	Screw/Torque(Max)[N.m]	/		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	250℃ /5S		
引针尺寸	Pin dimensions [mm]	0.8*0.5		
PCB板孔径	PCB Hole Diameter [mm]	∅1.1		

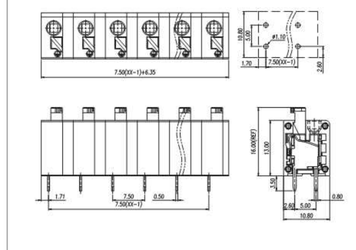




Pitch:5.0mm

DB804-5.0

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	12	-	10
接线范围 Wire Range	单芯线 Solid [AWG]	20~12		
	多芯线 Stranded [AWG]	20~12		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	250	320	630
额定电流	Rated Current [A]	24	24	24
额定冲击电压	Impulse withstand voltage [KV]	4	4	4
导线截面积 Conductor cross section	硬质导线 Solid [mm²]	0.25~2.5		
	柔性导线 Flexible [mm²]	0.25 ~2.5		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	5.0/1~30		
剥线长度	Stripping Length [mm]	10~11		
螺丝/扭矩	Screw/Torque(Max)[N.m]	/		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	250℃ /5S		
引针尺寸	Pin dimensions [mm]	0.8*0.6		
PCB板孔径	PCB Hole Diameter [mm]	∅1.3		

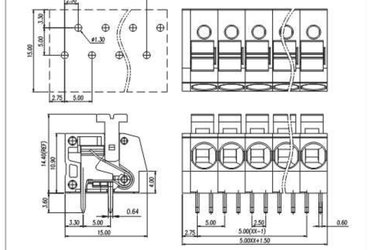




Pitch: 7.5/10.0mm

DB804-7.5/10.0

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	12	-	10
接线范围 Wire Range	单芯线 Solid [AWG]	20~12		
	多芯线 Stranded [AWG]	20~12		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	320	320	630
额定电流	Rated Current [A]	24	24	24
额定冲击电压	Impulse withstand voltage [KV]	4	4	4
导线截面积 Conductor cross section	硬质导线 Solid [mm²]	0.25~2.5		
	柔性导线 Flexible [mm²]	0.25 ~2.5		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	7.5,10.0/2~18		
剥线长度	Stripping Length [mm]	10~11		
螺丝/扭矩	Screw/Torque(Max)[N.m]	/		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	250℃ /5S		
引针尺寸	Pin dimensions [mm]	0.8*0.6		
PCB板孔径	PCB Hole Diameter [mm]	∅1.3		

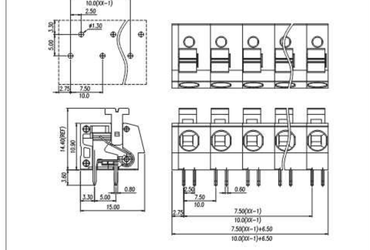




Pitch:5.08mm

DB238-5.08

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	10	-	10
接线范围 Wire Range	单芯线 Solid [AWG]	22~16		
	多芯线 Stranded [AWG]	22~16		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	250	320	630
额定电流	Rated Current [A]	12	12	12
额定冲击电压	Impulse withstand voltage [KV]	4	4	4
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	0.2~1.5		
	柔性导线 Flexible[mm²]	0.2~1.5		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	5.08/2~12		
剥线长度	Stripping Length [mm]	10		
螺丝/扭矩	Screw/Torque(Max)[N.m]	/		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	250℃ /5S		
引针尺寸	Pin dimensions [mm]	0.9*0.5		
PCB板孔径	PCB Hole Diameter [mm]	∅1.2		






Pitch: 7.5mm

DB239R-7.5

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	600	600	600
额定电流	Rated Current [A]	40	40	5
接线范围 Wire Range	单芯线 Solid [AWG]	24~8		
	多芯线 Stranded [AWG]	24~8		
耐电压	Dielectric Voltage-Withstand	2.2KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	800	1000	1000
额定电流	Rated Current [A]	41	41	41
额定冲击电压	Impulse withstand voltage [KV]	8	8	6
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	0.2~10		
	柔性导线 Flexible[mm²]	0.2~6		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	7.5/1~18		
剥线长度	Stripping Length [mm]	15		
螺丝/扭矩	Screw/Torque(Max)[N.m]	/		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	250℃ /5S		
引针尺寸	Pin dimensions [mm]	1.7*0.8		
PCB板孔径	PCB Hole Diameter [mm]	∅2.1		

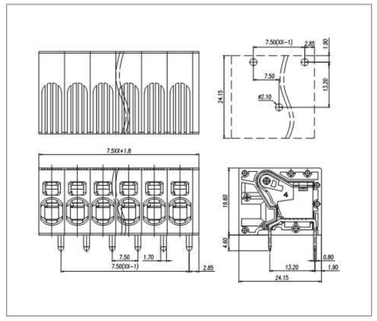




Pitch:7.5mm

DB239V-7.5

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	600	600	600
额定电流	Rated Current [A]	40	40	5
接线范围 Wire Range	单芯线 Solid [AWG]	24~8		
	多芯线 Stranded [AWG]	24~8		
耐电压	Dielectric Voltage-Withstand	2.2KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	800	1000	1000
额定电流	Rated Current [A]	41	41	41
额定冲击电压	Impulse withstand voltage [KV]	8	8	6
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	0.2~10		
	柔性导线 Flexible[mm²]	0.2~6		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	7.5/1~18		
剥线长度	Stripping Length [mm]	15		
螺丝/扭矩	Screw/Torque(Max)[N.m]	/		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	250℃ /5S		
引针尺寸	Pin dimensions [mm]	1.7*0.8		
PCB板孔径	PCB Hole Diameter [mm]	∅2.1		

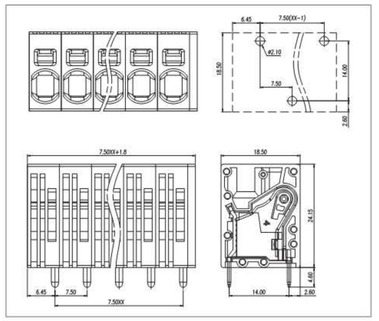




Pitch: 10.0mm

DB239R-10.0

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	600	600	600
额定电流	Rated Current [A]	66	66	5
接线范围 Wire Range	单芯线 Solid [AWG]	18~4		
	多芯线 Stranded [AWG]	18~4		
耐电压	Dielectric Voltage-Withstand	2.2KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	1000	1000	1000
额定电流	Rated Current [A]	76	76	76
额定冲击电压	Impulse withstand voltage [KV]	8	8	6
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	0.75~16		
	柔性导线 Flexible[mm²]	0.75~16		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	10.0/1~12		
剥线长度	Stripping Length [mm]	18		
螺丝/扭矩	Screw/Torque(Max)[N.m]	/		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	250℃ /5S		
引针尺寸	Pin dimensions [mm]	1.2*1.0		
PCB板孔径	PCB Hole Diameter [mm]	∅1.8		

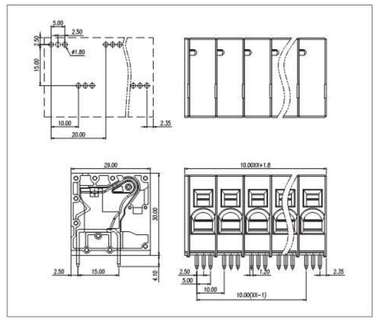




Pitch: 10.0mm

DB239V-10.0

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	600	600	600
额定电流	Rated Current [A]	66	66	5
接线范围 Wire Range	单芯线 Solid [AWG]	18~4		
	多芯线 Stranded [AWG]	18~4		
耐电压	Dielectric Voltage-Withstand	2.2KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	1000	1000	1000
额定电流	Rated Current [A]	76	76	76
额定冲击电压	Impulse withstand voltage [KV]	8	8	6
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	0.75~16		
	柔性导线 Flexible[mm²]	0.75~16		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	10.0/1~12		
剥线长度	Stripping Length [mm]	18		
螺丝/扭矩	Screw/Torque(Max)[N.m]	/		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	250℃ /5S		
引针尺寸	Pin dimensions [mm]	1.2*1.0		
PCB板孔径	PCB Hole Diameter [mm]	∅1.8		

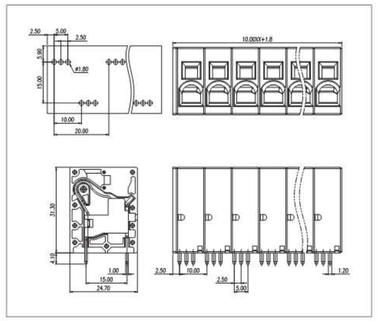




Pitch:7.5mm

DB240S-7.5

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	600	600	600
额定电流	Rated Current [A]	27	27	5
接线范围 Wire Range	单芯线 Solid [AWG]	24~10		
	多芯线 Stranded [AWG]	24~10		
耐电压	Dielectric Voltage-Withstand	2.2KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	1000	1000	1000
额定电流	Rated Current [A]	41	41	41
额定冲击电压	Impulse withstand voltage [KV]	8	8	6
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	0.2~6		
	柔性导线 Flexible[mm²]	0.2~6		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	7.5/1~24		
剥线长度	Stripping Length [mm]	15~16		
螺丝/扭矩	Screw/Torque(Max)[N.m]	/		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	250℃ /5S		
引针尺寸	Pin dimensions [mm]	1.2 *1.2		
PCB板孔径	PCB Hole Diameter [mm]	∅ 2.0		

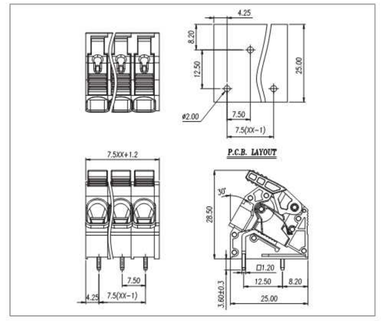




Pitch:7.5mm

DB240R-7.5

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	600	600	600
额定电流	Rated Current [A]	27	27	5
接线范围 Wire Range	单芯线 Solid [AWG]	24~10		
	多芯线 Stranded [AWG]	24~10		
耐电压	Dielectric Voltage-Withstand	2.2KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	1000	1000	1000
额定电流	Rated Current [A]	41	41	41
额定冲击电压	Impulse withstand voltage [KV]	6	6	6
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	0.2~6		
	柔性导线 Flexible[mm²]	0.2~6		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	7.5/1~24		
剥线长度	Stripping Length [mm]	15~16		
螺丝/扭矩	Screw/Torque(Max)[N.m]	/		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	250℃ /5S		
引针尺寸	Pin dimensions [mm]	1.2*1.2		
PCB板孔径	PCB Hole Diameter [mm]	∅2.0		






Pitch: 10.0mm

DB240R-10.0

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	600	600	600
额定电流	Rated Current [A]	51	51	5
接线范围 Wire Range	单芯线 Solid [AWG]	18~4		
	多芯线 Stranded [AWG]	18~4		
耐电压	Dielectric Voltage-Withstand	2.2KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	1000	1000	1000
额定电流	Rated Current [A]	76	76	76
额定冲击电压	Impulse withstand voltage [KV]	8	8	8
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	0.2~16		
	柔性导线 Flexible[mm²]	0.2~16		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	10.0/1~18		
剥线长度	Stripping Length [mm]	17~18		
螺丝/扭矩	Screw/Torque(Max)[N.m]	/		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	250℃ /5S		
引针尺寸	Pin dimensions [mm]	1.2*1.2		
PCB板孔径	PCB Hole Diameter [mm]	∅1.6		






Pitch:15.0mm

DB240R-15.0

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	600	600	-
额定电流	Rated Current [A]	51	51	-
接线范围 Wire Range	单芯线 Solid [AWG]	18~4		
	多芯线 Stranded [AWG]	18~4		
耐电压	Dielectric Voltage-Withstand	2.2KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	1000	1000	1000
额定电流	Rated Current [A]	76	76	76
额定冲击电压	Impulse withstand voltage [KV]	8	8	8
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	0.2~16		
	柔性导线 Flexible[mm²]	0.2~16		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	15.0/2~18		
剥线长度	Stripping Length [mm]	17~18		
螺丝/扭矩	Screw/Torque(Max)[N.m]	/		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	250℃ /5S		
引针尺寸	Pin dimensions [mm]	1.2*1.2		
PCB板孔径	PCB Hole Diameter [mm]	∅1.9		

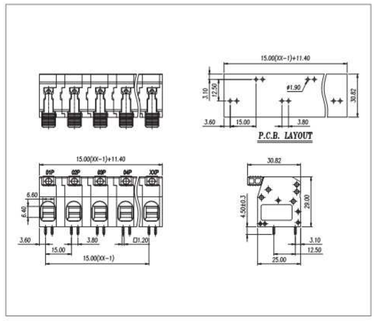




Pitch:3.5mm

DB241V-3.5

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	10	-	10
接线范围 Wire Range	单芯线 Solid [AWG]	24~16		
	多芯线 Stranded [AWG]	24~16		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	160	200	400
额定电流	Rated Current [A]	17.5	17.5	17.5
额定冲击电压	Impulse withstand voltage [KV]	2.5	2.5	2.5
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	0.2~1.5		
	柔性导线 Flexible[mm²]	0.2~1.5		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	3.5/1~30		
剥线长度	Stripping Length [mm]	11~12		
螺丝/扭矩	Screw/Torque(Max)[N.m]	/		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	250℃ /5S		
引针尺寸	Pin dimensions [mm]	0.8*0.8		
PCB板孔径	PCB Hole Diameter [mm]	∅1.3		

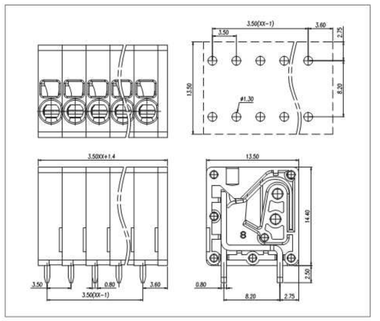




Pitch:3.5 mm

DB241R-3.5

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	10	-	10
接线范围 Wire Range	单芯线 Solid [AWG]	24~16		
	多芯线 Stranded [AWG]	24~16		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	160	200	400
额定电流	Rated Current [A]	17.5	17.5	17.5
额定冲击电压	Impulse withstand voltage [KV]	2.5	2.5	2.5
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	0.2~1.5		
	柔性导线 Flexible[mm²]	0.2~1.5		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	3.5/1~30		
剥线长度	Stripping Length [mm]	11~12		
螺丝/扭矩	Screw/Torque(Max)[N.m]	/		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	250℃ /5S		
引针尺寸	Pin dimensions [mm]	0.8*0.8		
PCB板孔径	PCB Hole Diameter [mm]	∅1.3		

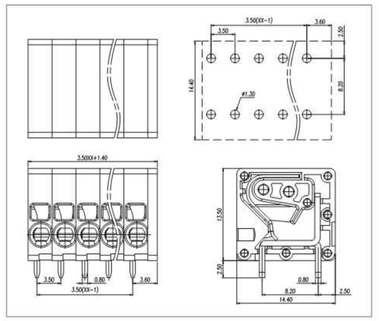




Pitch:5.0mm

DB241V-5.0

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	20	-	10
接线范围 Wire Range	单芯线 Solid [AWG]	24~12		
	多芯线 Stranded [AWG]	24~12		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	250	400	630
额定电流	Rated Current [A]	24	24	24
额定冲击电压	Impulse withstand voltage [KV]	4	4	4
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	0.2~4.0		
	柔性导线 Flexible[mm²]	0.2~2.5		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	5.0/1~30		
剥线长度	Stripping Length [mm]	9~10		
螺丝/扭矩	Screw/Torque(Max)[N.m]	/		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	250℃ /5S		
引针尺寸	Pin dimensions [mm]	0.8*0.8		
PCB板孔径	PCB Hole Diameter [mm]	∅1.3		

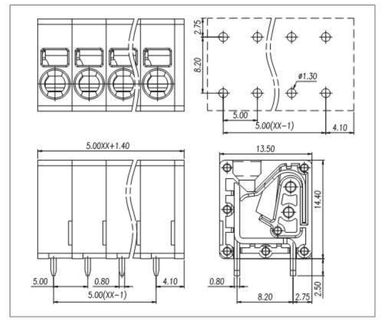




Pitch:5.0mm

DB241R-5.0

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	20	-	10
接线范围 Wire Range	单芯线 Solid [AWG]	24~12		
	多芯线 Stranded [AWG]	24~12		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	250	400	630
额定电流	Rated Current [A]	24	24	24
额定冲击电压	Impulse withstand voltage [KV]	4	4	4
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	0.2~4.0		
	柔性导线 Flexible[mm²]	0.2~2.5		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	5.0/1~30		
剥线长度	Stripping Length [mm]	9~10		
螺丝/扭矩	Screw/Torque(Max)[N.m]	/		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	250℃ /5S		
引针尺寸	Pin dimensions [mm]	0.8*0.8		
PCB板孔径	PCB Hole Diameter [mm]	∅1.3		

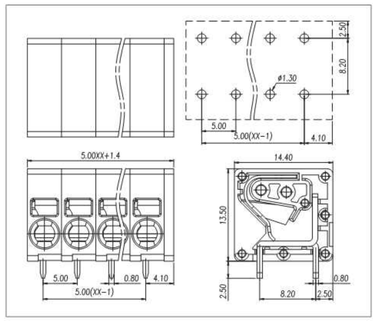




Pitch:5.0mm

DB242-5.0

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	20	-	10
接线范围 Wire Range	单芯线 Solid [AWG]	28~12		
	多芯线 Stranded [AWG]	28~12		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	320	320	630
额定电流	Rated Current [A]	32	32	32
额定冲击电压	Impulse withstand voltage [KV]	4	4	4
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	0.2~4.0		
	柔性导线 Flexible[mm²]	0.2~4.0		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	5.0/1~24		
剥线长度	Stripping Length [mm]	9~10		
螺丝/扭矩	Screw/Torque(Max)[N.m]	/		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	250℃ /5S		
引针尺寸	Pin dimensions [mm]	1.2*0.8		
PCB板孔径	PCB Hole Diameter [mm]	∅1.8		

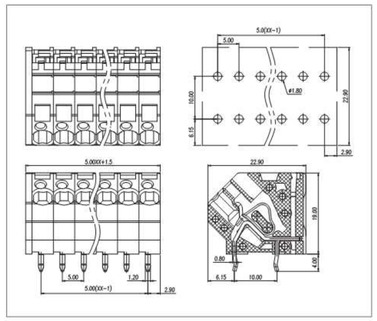




Pitch:7.5mm

DB242-7.5

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	150	300
额定电流	Rated Current [A]	20	20	10
接线范围 Wire Range	单芯线 Solid [AWG]	28~12		
	多芯线 Stranded [AWG]	28~12		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	500	630	1000
额定电流	Rated Current [A]	32	32	32
额定冲击电压	Impulse withstand voltage [KV]	6	6	6
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	0.2~4.0		
	柔性导线 Flexible[mm²]	0.2~4.0		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	7.5/2~24		
剥线长度	Stripping Length [mm]	9~10		
螺丝/扭矩	Screw/Torque(Max)[N.m]	/		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	250℃ /5S		
引针尺寸	Pin dimensions [mm]	1.2*0.8		
PCB板孔径	PCB Hole Diameter [mm]	∅1.8		

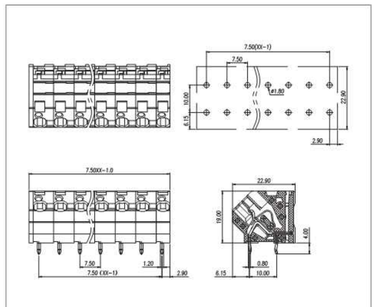




Pitch:5.0mm

DB243-5.0

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	15	-	10
接线范围 Wire Range	单芯线 Solid [AWG]	26~14		
	多芯线 Stranded [AWG]	26~14		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	250	320	630
额定电流	Rated Current [A]	24	24	24
额定冲击电压	Impulse withstand voltage [KV]	4	4	4
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	0.2~2.5		
	柔性导线 Flexible[mm²]	0.2~2.5		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	5.0/1~30		
剥线长度	Stripping Length [mm]	5~6		
螺丝/扭矩	Screw/Torque(Max)[N.m]	/		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	250℃ /5S		
引针尺寸	Pin dimensions [mm]	0.8*0.7		
PCB板孔径	PCB Hole Diameter [mm]	∅1.3		

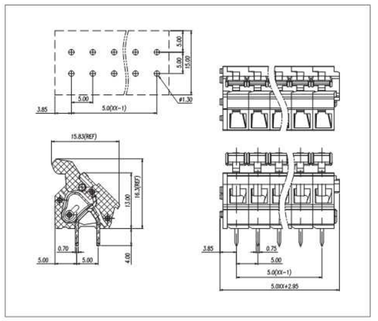




Pitch:5.0/5.08mm

DB245-5.0/5.08

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	15	-	10
接线范围 Wire Range	单芯线 Solid [AWG]	26~14		
	多芯线 Stranded [AWG]	26~14		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	250	320	630
额定电流	Rated Current [A]	24	24	24
额定冲击电压	Impulse withstand voltage [KV]	4	4	4
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	0.2~2.5		
	柔性导线 Flexible[mm²]	0.2~2.5		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	5.0.5.08/1~30		
剥线长度	Stripping Length [mm]	5~6		
螺丝/扭矩	Screw/Torque(Max)[N.m]	/		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	250℃ /5S		
引针尺寸	Pin dimensions [mm]	0.75*0.7		
PCB板孔径	PCB Hole Diameter [mm]	∅1.3		

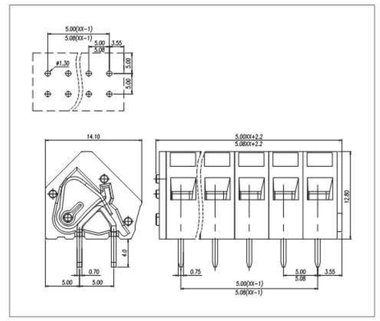





Pitch: 7.5/7.62 mm

DB245-7.5/7.62

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	15	-	10
接线范围 Wire Range	单芯线 Solid [AWG]	26~14		
	多芯线 Stranded [AWG]	26~14		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	400	630	1000
额定电流	Rated Current [A]	24	24	24
额定冲击电压	Impulse withstand voltage [KV]	6	6	6
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	0.2~2.5		
	柔性导线 Flexible[mm²]	0.2~2.5		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	7.5,7.62/1~30		
剥线长度	Stripping Length [mm]	5~6		
螺丝/扭矩	Screw/Torque(Max)[N.m]	/		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	250℃ /5S		
引针尺寸	Pin dimensions [mm]	0.75*0.7		
PCB板孔径	PCB Hole Diameter [mm]	∅1.3		

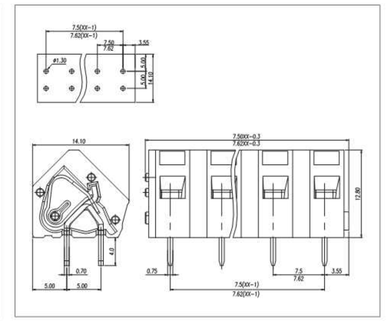





Pitch:5.0/5.08mm

DB245H-5.0/5.08

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	10	-	10
接线范围 Wire Range	单芯线 Solid [AWG]	28~12		
	多芯线 Stranded [AWG]	28~12		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	250	320	630
额定电流	Rated Current [A]	21	21	21
额定冲击电压	Impulse withstand voltage [KV]	4	4	4
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	0.2~2.5		
	柔性导线 Flexible[mm²]	0.2~2.5		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	5.0,5.08/2*2~2*24		
剥线长度	Stripping Length [mm]	5~6		
螺丝/扭矩	Screw/Torque(Max)[N.m]	/		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	250℃ /5S		
引针尺寸	Pin dimensions [mm]	0.7*0.7		
PCB板孔径	PCB Hole Diameter [mm]	∅1.3		






Pitch:7.5/7.62mm

DB245H-7.5/7.62

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	10	-	10
接线范围 Wire Range	单芯线 Solid [AWG]	28~12		
	多芯线 Stranded [AWG]	28~12		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	400	630	1000
额定电流	Rated Current [A]	21	21	21
额定冲击电压	Impulse withstand voltage [KV]	6	6	6
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	0.2~2.5		
	柔性导线 Flexible[mm²]	0.2~2.5		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	7.5,7.62/2*2~2*16		
剥线长度	Stripping Length [mm]	5~6		
螺丝/扭矩	Screw/Torque(Max)[N.m]	/		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	250℃ /5S		
引针尺寸	Pin dimensions [mm]	0.7*0.7		
PCB板孔径	PCB Hole Diameter [mm]	∅1.3		







Pitch:10.0/10.16mm

DB245H-10.0/10.16

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	10	-	10
接线范围 Wire Range	单芯线 Solid [AWG]	28~12		
	多芯线 Stranded [AWG]	28~12		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	630	1000	1000
额定电流	Rated Current [A]	21	21	21
额定冲击电压	Impulse withstand voltage [KV]	8	8	8
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	0.2~2.5		
	柔性导线 Flexible[mm²]	0.2~2.5		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	10,10.16/2*2~2*12		
剥线长度	Stripping Length [mm]	5~6		
螺丝/扭矩	Screw/Torque(Max)[N.m]	/		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	250℃ /5S		
引针尺寸	Pin dimensions [mm]	0.7*0.7		
PCB板孔径	PCB Hole Diameter [mm]	∅1.3		

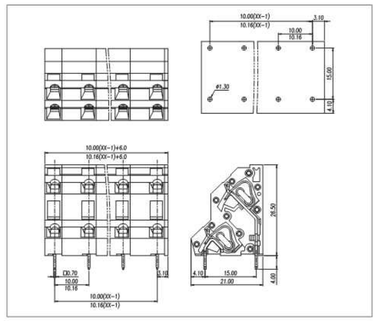





Pitch:5.0/5.08mm

DB245H3-5.0/5.08

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	10	-	10
接线范围 Wire Range	单芯线 Solid [AWG]	28~12		
	多芯线 Stranded [AWG]	28~12		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	250	320	630
额定电流	Rated Current [A]	21	21	21
额定冲击电压	Impulse withstand voltage [KV]	4	4	4
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	0.2~2.5		
	柔性导线 Flexible[mm²]	0.2~2.5		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	5.0,5.08/3*2~3*24		
剥线长度	Stripping Length [mm]	5~6		
螺丝/扭矩	Screw/Torque(Max)[N.m]	/		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	250℃ /5S		
引针尺寸	Pin dimensions [mm]	0.7*0.7		
PCB板孔径	PCB Hole Diameter [mm]	∅1.3		




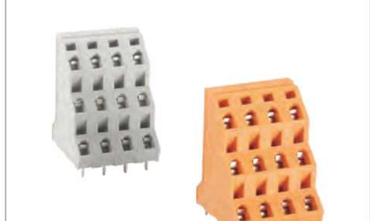

Pitch:7.5/7.62mm

DB245H3-7.5/7.62

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	10	-	10
接线范围 Wire Range	单芯线 Solid [AWG]	28~12		
	多芯线 Stranded [AWG]	28~12		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	400	630	1000
额定电流	Rated Current [A]	21	21	21
额定冲击电压	Impulse withstand voltage [KV]	6	6	6
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	0.2~2.5		
	柔性导线 Flexible[mm²]	0.2~2.5		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	7.5,7.62/3*2~3*16		
剥线长度	Stripping Length [mm]	5~6		
螺丝/扭矩	Screw/Torque(Max)[N.m]	/		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	250℃ /5S		
引针尺寸	Pin dimensions [mm]	0.7*0.7		
PCB板孔径	PCB Hole Diameter [mm]	∅1.3		

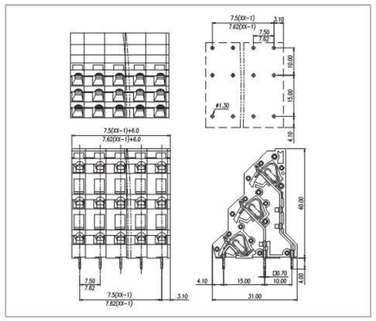





Pitch:10.0/10.16mm

DB245H3-10.0/10.16

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	10	-	10
接线范围 Wire Range	单芯线 Solid [AWG]	28~12		
	多芯线 Stranded [AWG]	28~12		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	630	1000	1000
额定电流	Rated Current [A]	21	21	21
额定冲击电压	Impulse withstand voltage [KV]	8	8	8
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	0.2~2.5		
	柔性导线 Flexible[mm²]	0.2~2.5		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	10,10.16/3*2~3*12		
剥线长度	Stripping Length [mm]	5~6		
螺丝/扭矩	Screw/Torque(Max)[N.m]	/		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	250℃ /5S		
引针尺寸	Pin dimensions [mm]	0.7*0.7		
PCB板孔径	PCB Hole Diameter [mm]	∅1.3		

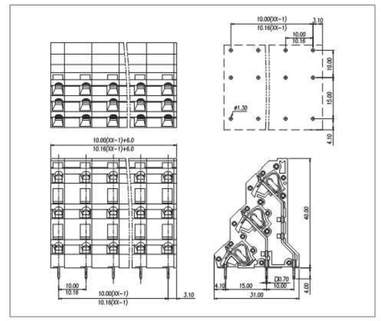





Pitch:5.0/5.08mm

DB245H4-5.0/5.08

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	10	-	10
接线范围 Wire Range	单芯线 Solid [AWG]	28~12		
	多芯线 Stranded [AWG]	28~12		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	250	320	630
额定电流	Rated Current [A]	18	18	18
额定冲击电压	Impulse withstand voltage [KV]	4	4	4
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	0.2~2.5		
	柔性导线 Flexible[mm²]	0.2~2.5		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	5.0,5.08/4*2~4*24		
剥线长度	Stripping Length [mm]	5~6		
螺丝/扭矩	Screw/Torque(Max)[N.m]	/		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	250℃ /5S		
引针尺寸	Pin dimensions [mm]	0.7*0.7		
PCB板孔径	PCB Hole Diameter [mm]	∅1.3		

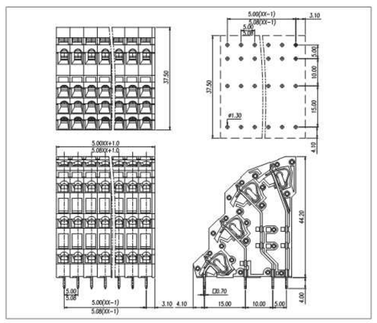





Pitch:7.5/7.62mm

DB245H4-7.5/7.62

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	10	-	10
接线范围 Wire Range	单芯线 Solid [AWG]	28~12		
	多芯线 Stranded [AWG]	28~12		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	400	630	1000
额定电流	Rated Current [A]	18	18	18
额定冲击电压	Impulse withstand voltage [KV]	6	6	6
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	0.2~2.5		
	柔性导线 Flexible[mm²]	0.2~2.5		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	7.5,7.62/4*2~4*16		
剥线长度	Stripping Length [mm]	5~6		
螺丝/扭矩	Screw/Torque(Max)[N.m]	/		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	250℃ /5S		
引针尺寸	Pin dimensions [mm]	0.7*0.7		
PCB板孔径	PCB Hole Diameter [mm]	∅1.3		

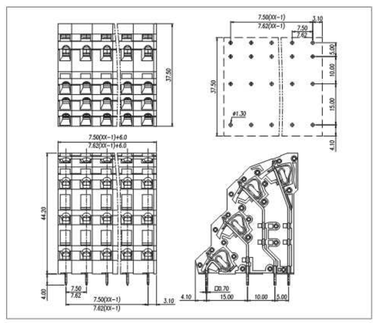




Pitch:10.0/10.16mm

DB245H4-10.0/10.16

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	10	-	10
接线范围 Wire Range	单芯线 Solid [AWG]	28~12		
	多芯线 Stranded [AWG]	28~12		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	630	1000	1000
额定电流	Rated Current [A]	18	18	18
额定冲击电压	Impulse withstand voltage [KV]	8	8	8
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	0.2~2.5		
	柔性导线 Flexible[mm²]	0.2~2.5		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	10,10.16/4*2~4*12		
剥线长度	Stripping Length [mm]	5~6		
螺丝/扭矩	Screw/Torque(Max)[N.m]	/		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	250℃ /5S		
引针尺寸	Pin dimensions [mm]	0.7*0.7		
PCB板孔径	PCB Hole Diameter [mm]	∅1.3		

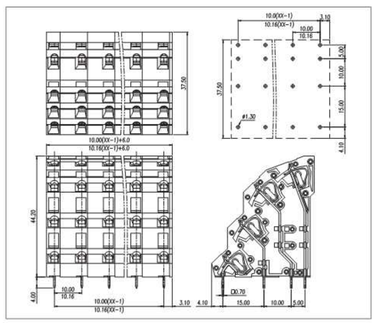




Pitch:7.5mm

DB246-7.5

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	150	300
额定电流	Rated Current [A]	30	30	10
接线范围 Wire Range	单芯线 Solid [AWG]	24~10		
	多芯线 Stranded [AWG]	24~10		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	500	630	1000
额定电流	Rated Current [A]	41	41	41
额定冲击电压	Impulse withstand voltage [KV]	6	6	6
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	0.2~6.0		
	柔性导线 Flexible[mm²]	0.2~6.0		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	7.5/1~30		
剥线长度	Stripping Length [mm]	11~12		
螺丝/扭矩	Screw/Torque(Max)[N.m]	/		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	250℃ /5S		
引针尺寸	Pin dimensions [mm]	1.5*1.0		
PCB板孔径	PCB Hole Diameter [mm]	∅1.8		

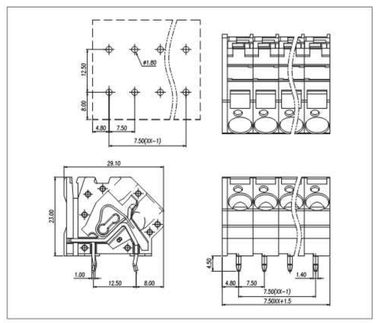




Pitch: 10.0mm

DB246-10.0

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	150	300
额定电流	Rated Current [A]	30	30	10
接线范围 Wire Range	单芯线 Solid [AWG]	24~10		
	多芯线 Stranded [AWG]	24~10		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	630	1000	1000
额定电流	Rated Current [A]	41	41	41
额定冲击电压	Impulse withstand voltage [KV]	8	8	8
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	0.2~6.0		
	柔性导线 Flexible[mm²]	0.2~6.0		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	10.0/1~30		
剥线长度	Stripping Length [mm]	11~12		
螺丝/扭矩	Screw/Torque(Max)[N.m]	/		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	250℃ /5S		
引针尺寸	Pin dimensions [mm]	1.5*1.0		
PCB板孔径	PCB Hole Diameter [mm]	∅1.8		

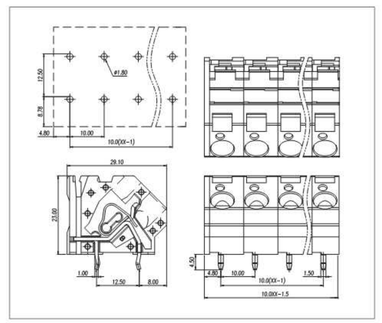




Pitch:5.0mm

DB247-5.0

UL/CUL 技术参数 UL/CUL Technical Data				
等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	-
额定电流	Rated Current [A]	8	-	-
接线范围 Wire Range	单芯线 Solid [AWG]	20-16		
	多芯线 Stranded [AWG]	20-16		
耐电压	Dielectric Voltage-Withstand	1.6KV		
IEC 技术参数 IEC Technical Data				
过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	320	320	320
额定电流	Rated Current [A]	17.5	17.5	17.5
额定冲击电压	Impulse withstand voltage [KV]	4	4	4
导线截面积 Conductor cross section	硬质导线 Solid[mm²]	0.2~1.5		
	柔性导线 Flexible[mm²]	0.2~1.5		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flame retardant rating	UL94V-0		
导体材料	Conductor Material	Copper alloy		
导体表面镀层	Plating of conductor surface	Sn plated		
一般参数 Other Data				
间距/极数	Pitch/Poles [mm]/[P]	5.0/02~24		
剥线长度	Stripping Length [mm]	7~8		
螺丝/扭矩	Screw/Torque(Max)[N.m]	/		
工作温度	Operating temperature[℃]	-40~+105		
焊锡温度	Soldering temperature	250℃ /5S		
引针尺寸	Pin dimensions [mm]	0.5*0.8		
PCB板孔径	PCB Hole Diameter [mm]	∅1.2		

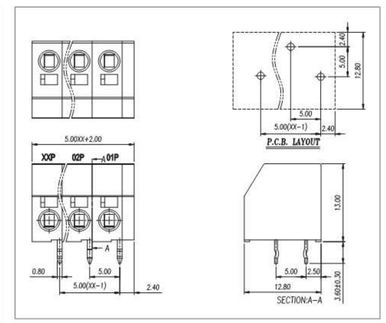



Pitch:7.5mm

DB247-7.5

UL/CUL 技术参数
UL/CUL Technical Data

等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	-
额定电流	Rated Current [A]	8	-	-
接线范围 Wire Range	单芯线 Solid [AWG]	20-16		
	多芯线 Stranded [AWG]	20-16		
耐电压	Dielectric Voltage-Withstand	1.6KV		

IEC 技术参数
IEC Technical Data


过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	320	320	320
额定电流	Rated Current [A]	17.5	17.5	17.5
额定冲击电压	Impulse withstand voltage [KV]	4	4	4
导线截面积 Conductor cross section	硬质导线 Solid [mm²]	0.2~1.5		
	柔性导线 Flexible [mm²]	0.2~1.5		


材料 Material

绝缘材料	Insulation Material	PA66
阻燃等级	Flame retardant rating	UL94V-0
导体材料	Conductor Material	Copper alloy
导体表面镀层	Plating of conductor surface	Sn plated

一般参数 Other Data

间距/极数	Pitch/Poles [mm]/[P]	7.5/02~24
剥线长度	Stripping Length [mm]	7~8
螺丝/扭矩	Screw/Torque(Max)[N.m]	/
工作温度	Operating temperature[℃]	-40~+105
焊锡温度	Soldering temperature	250℃ /5S
引针尺寸	Pin dimensions [mm]	0.5*0.8
PCB板孔径	PCB Hole Diameter [mm]	∅1.2

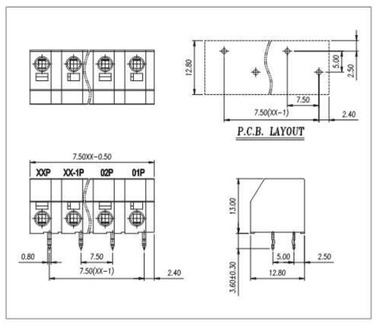



Pitch:3.81/5.08mm

DB249-3.81/5.08

UL/CUL 技术参数
UL/CUL Technical Data

等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	-
额定电流	Rated Current [A]	10	-	-
接线范围 Wire Range	单芯线 Solid [AWG]	26~16		
	多芯线 Stranded [AWG]	26~16		
耐电压	Dielectric Voltage-Withstand	1.6KV		

IEC 技术参数
IEC Technical Data


过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	160	160	320
额定电流	Rated Current [A]	9	9	9
额定冲击电压	Impulse withstand voltage [KV]	2.5	2.5	2.5
导线截面积 Conductor cross section	硬质导线 Solid [mm²]	0.2~1.5		
	柔性导线 Flexible [mm²]	0.2~1.5		

材料 Material

绝缘材料	Insulation Material	PA66
阻燃等级	Flame retardant rating	UL94V-0
导体材料	Conductor Material	Copper alloy
导体表面镀层	Plating of conductor surface	Sn plated

一般参数 Other Data

间距/极数	Pitch/Poles [mm]/[P]	3.81,5.08/2~24
剥线长度	Stripping Length [mm]	10
螺丝/扭矩	Screw/Torque(Max)[N.m]	/
工作温度	Operating temperature[℃]	-40~+105
焊锡温度	Soldering temperature	250℃ /5S
引针尺寸	Pin dimensions [mm]	0.6*1.0
PCB板孔径	PCB Hole Diameter [mm]	∅1.2





Pitch:2.5mm

DB250-2.5

UL/CUL 技术参数
UL/CUL Technical Data

等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	4	-	4
接线范围 Wire Range	单芯线 Solid [AWG]	28~20		
	多芯线 Stranded [AWG]	28~20		
耐电压	Dielectric Voltage-Withstand	1.6KV		

IEC 技术参数
IEC Technical Data


过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	160	160	320
额定电流	Rated Current [A]	4	4	4
额定冲击电压	Impulse withstand voltage [KV]	2.5	2.5	2.5
导线截面积 Conductor cross section	硬质导线 Solid [mm²]	0.2~0.5		
	柔性导线 Flexible [mm²]	0.2~0.5		

材料 Material

绝缘材料	Insulation Material	PA66
阻燃等级	Flame retardant rating	UL94V-0
导体材料	Conductor Material	Copper alloy
导体表面镀层	Plating of conductor surface	Sn plated

一般参数 Other Data

间距/极数	Pitch/Poles [mm]/[P]	2.5/1~30
剥线长度	Stripping Length [mm]	8.5~9.5
螺丝/扭矩	Screw/Torque(Max)[N.m]	/
工作温度	Operating temperature[℃]	-40~+105
焊锡温度	Soldering temperature	250℃ /5S
引针尺寸	Pin dimensions [mm]	0.75*0.4
PCB板孔径	PCB Hole Diameter [mm]	∅1.1





Pitch:3.5mm

DB250-3.5

UL/CUL 技术参数
UL/CUL Technical Data

等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	5	-	5
接线范围 Wire Range	单芯线 Solid [AWG]	22~18		
	多芯线 Stranded [AWG]	22~18		
耐电压	Dielectric Voltage-Withstand	1.6KV		

IEC 技术参数
IEC Technical Data


过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	160	160	320
额定电流	Rated Current [A]	8	8	8
额定冲击电压	Impulse withstand voltage [KV]	2.5	2.5	2.5
导线截面积 Conductor cross section	硬质导线 Solid [mm²]	0.2~1.0		
	柔性导线 Flexible [mm²]	0.2~1.0		

材料 Material

绝缘材料	Insulation Material	PA66
阻燃等级	Flame retardant rating	UL94V-0
导体材料	Conductor Material	Copper alloy
导体表面镀层	Plating of conductor surface	Sn plated

一般参数 Other Data

间距/极数	Pitch/Poles [mm]/[P]	3.5/1~30
剥线长度	Stripping Length [mm]	8~9
螺丝/扭矩	Screw/Torque(Max)[N.m]	/
工作温度	Operating temperature[℃]	-40~+105
焊锡温度	Soldering temperature	250℃ /5S
引针尺寸	Pin dimensions [mm]	0.75*0.4
PCB板孔径	PCB Hole Diameter [mm]	∅1.2





Pitch:5.0mm

DB250T-5.0

UL/CUL 技术参数
UL/CUL Technical Data

等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	10	-	10
接线范围 Wire Range	单芯线 Solid [AWG]	20~16		
	多芯线 Stranded [AWG]	20~16		
耐电压	Dielectric Voltage-Withstand	1.6KV		

IEC 技术参数
IEC Technical Data


过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	320	320	630
额定电流	Rated Current [A]	17.5	17.5	17.5
额定冲击电压	Impulse withstand voltage [KV]	4	4	4
导线截面积 Conductor cross section	硬质导线 Solid [mm²]	0.2~1.5		
	柔性导线 Flexible [mm²]	0.2~1.5		


材料 Material

绝缘材料	Insulation Material	PA66
阻燃等级	Flame retardant rating	UL94V-0
导体材料	Conductor Material	Copper alloy
导体表面镀层	Plating of conductor surface	Sn plated

一般参数 Other Data

间距/极数	Pitch/Poles [mm]/[P]	5.0/2*1~2*30
剥线长度	Stripping Length [mm]	9~10
螺丝/扭矩	Screw/Torque(Max)[N.m]	/
工作温度	Operating temperature[℃]	-40~+105
焊锡温度	Soldering temperature	250℃ /5S
引针尺寸	Pin dimensions [mm]	0.75*0.5
PCB板孔径	PCB Hole Diameter [mm]	∅1.2



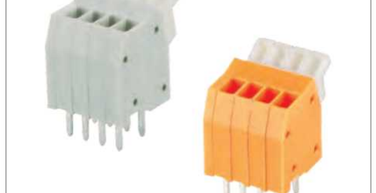

Pitch:2.5/2.54mm

DB251-2.5/2.54

UL/CUL 技术参数
UL/CUL Technical Data

等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	150	-	-
额定电流	Rated Current [A]	4	-	-
接线范围 Wire Range	单芯线 Solid [AWG]	28~20		
	多芯线 Stranded [AWG]	28~20		
耐电压	Dielectric Voltage-Withstand	1.3KV		

IEC 技术参数
IEC Technical Data


过电压类别	Overvoltage Category	Ⅲ	Ⅲ	Ⅱ
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	63	160	320
额定电流	Rated Current [A]	6	6	6
额定冲击电压	Impulse withstand voltage [KV]	2.5	2.5	2.5
导线截面积 Conductor cross section	硬质导线 Solid [mm²]	0.2~0.5		
	柔性导线 Flexible [mm²]	0.2~0.5		

材料 Material

绝缘材料	Insulation Material	PA66
阻燃等级	Flame retardant rating	UL94V-0
导体材料	Conductor Material	Copper alloy
导体表面镀层	Plating of conductor surface	Sn plated


一般参数 Other Data

间距/极数	Pitch/Poles [mm]/[P]	2.5,2.54/1~30
剥线长度	Stripping Length [mm]	5~6
螺丝/扭矩	Screw/Torque(Max)[N.m]	/
工作温度	Operating temperature[℃]	-40~+105
焊锡温度	Soldering temperature	250℃ /5S
引针尺寸	Pin dimensions [mm]	0.75*0.5
PCB板孔径	PCB Hole Diameter [mm]	∅1.1



ISO14001 OHSAS18001 ISO9001:2008 ISO80079-34 IATF16949

Terminal Block Professional Manufacturer

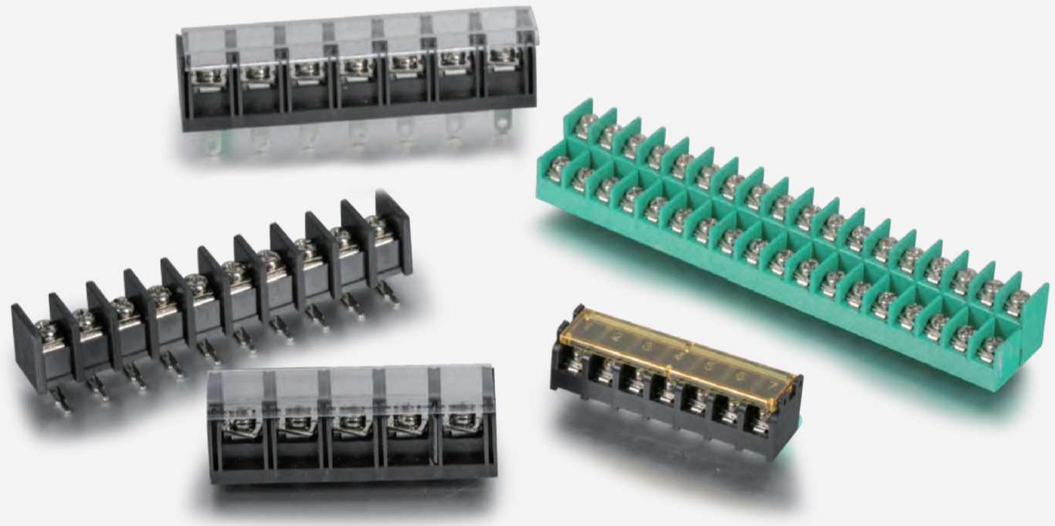

栅栏式接线端子
BARRIER TERMINAL BLOCK

栅栏式接线端子，接线直观明了，可以连接截面为0.5mm²至50mm²的所有类型的导线，间距6.35-27mm可供选择，可提供有盖、无盖，有无固定孔等款式。产品设计符合IEC60998、UL1059、UL486E、CSA C22.2 No.158等国际标准。


Barrier terminal blocks, connecting easily, provide the size from 0.5mm² to 50 mm², Available with different pitches from 6.35mm to 27.0mm. with cover and without cover. The product is designed in accordance with IEC 60998, UL1059, CSA C22.2 NO.158 standards.




DBT30C-7.62



DBT30S-7.62









DBT30H-7.62



DBT30R-7.62





材质及电镀	
螺丝	M3.0, 钢, 镀镍
焊脚	铜合金, 镀锡
塑件	PA66, UL94V-0


电气性能		
参考标准	UL	IEC
额定电压	300V	250V
额定电流	15A	17.5A
使用线径	22-14AWG	1.5mm²
接触电阻	20mΩ	
绝缘电阻	500MΩ/DC500V	
耐电压	AC2000V/1Min	
温度范围	-40℃~+105℃	
扭矩	5.10kgf-cm/0.5Nm/4.43Lbin	

MATERIAL	
Screw	M3.0 Steel Ni plated
Pin Header	Copper alloy, Sn plated
Housing	PA66, UL94V-0

ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	250V
Rated current	15A	17.5A
Wire range	22-14AWG	1.5mm²
Contact resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1Min	
Temp. range	-40℃~+105℃	
Torque	5.10kgf-cm/0.5Nm/4.43Lbin	




DBT30CM–7.62






DBT30SM–7.62

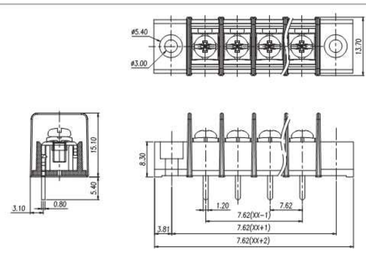




DBT30C–8.25






DBT30S–8.25






DBT30HM–7.62






DBT30RM–7.62

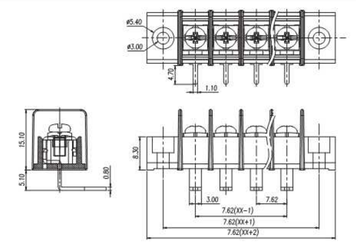




DDBT30H–8.25





DBT30R–8.25



材质及电镀	
螺丝	M3.0, 钢, 镀镍
焊脚	铜合金, 镀锡
塑件	PA66, UL94V–0

电气性能		
参考标准	UL	IEC
额定电压	300V	250V
额定电流	15A	17.5A
使用线径	22–14AWG	1.5mm²
接触电阻	20mΩ	
绝缘电阻	500MΩ/DC500V	
耐电压	AC2000V/1Min	
温度范围	–40℃~+105℃	
扭矩	5.10kgf–cm/0.5Nm/4.43Lbin	

MATERIAL	
Screw	M3.0 Steel Ni plated
Pin Header	Copper alloy, Sn plated
Housing	PA66, UL94V–0

ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	250V
Rated current	15A	17.5A
Wire range	22–14AWG	1.5mm²
Contact resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1Min	
Temp. range	–40℃~+105℃	
Torque	5.10kgf–cm/0.5Nm/4.43Lbin	

材质及电镀	
螺丝	M3.0, 钢, 镀镍
焊脚	铜合金, 镀锡
塑件	PA66, UL94V–0


电气性能		
参考标准	UL	IEC
额定电压	300V	250V
额定电流	20A	24A
使用线径	22–12AWG	2.5mm²
接触电阻	20mΩ	
绝缘电阻	500MΩ/DC500V	
耐电压	AC2000V/1Min	
温度范围	–40℃~+105℃	
扭矩	5.10kgf–cm/0.5Nm/4.43Lbin	

MATERIAL	
Screw	M3.0 Steel Ni plated
Pin Header	Copper alloy, Sn plated
Housing	PA66, UL94V–0

ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	250V
Rated current	20A	24A
Wire range	22–12AWG	2.5mm²
Contact resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1Min	
Temp. range	–40℃~+105℃	
Torque	5.10kgf–cm/0.5Nm/4.43Lbin	




DB30CM−8.25






DBT30SM−8.25

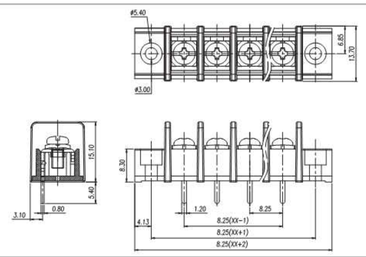




DBT30C−9.5






DBT30S−9.5






DB30HM−8.25





DBT30RM−8.25

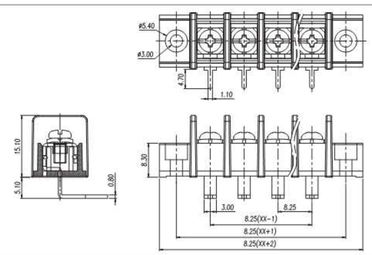

材质及电镀	
螺丝	M3.0, 钢, 镀镍
焊脚	铜合金, 镀锡
塑件	PA66, UL94V−0


电气性能		
参考标准	UL	IEC
额定电压	300V	250V
额定电流	20A	24A
使用线径	22−12AWG	2.5mm²
接触电阻	20mΩ	
绝缘电阻	500MΩ/DC500V	
耐电压	AC2000V/1Min	
温度范围	−40℃~+105℃	
扭矩	5.10kgf−cm/0.5Nm/4.43Lbin	

MATERIAL	
Screw	M3.0 Steel Ni plated
Pin Header	Copper alloy, Sn plated
Housing	PA66, UL94V−0

ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	250V
Rated current	20A	24A
Wire range	22−12AWG	2.5mm²
Contact resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1Min	
Temp. range	−40℃~+105℃	
Torque	5.10kgf−cm/0.5Nm/4.43Lbin	




DBT30H−9.5





DBT30R−9.5



材质及电镀	
螺丝	M4.0, 钢, 镀镍
焊脚	铜合金, 镀锡
塑件	PA66, UL94V−0


电气性能		
参考标准	UL	IEC
额定电压	300V	400V
额定电流	20A	24A
使用线径	22−12AWG	2.5mm²
接触电阻	20mΩ	
绝缘电阻	500MΩ/DC500V	
耐电压	AC2000V/1Min	
温度范围	−40℃~+105℃	
扭矩	12.24kgf−cm/1.2Nm/10.6Lbin	

MATERIAL	
Screw	M4.0 Steel Ni plated
Pin Header	Copper alloy, Sn plated
Housing	PA66, UL94V−0

ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	400V
Rated current	20A	24A
Wire range	22−12AWG	2.5mm²
Contact resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1Min	
Temp. range	−40℃~+105℃	
Torque	12.24kgf−cm/1.2Nm/10.6Lbin	




DBT30CM–9.5






DBT30SM–9.5






DBT30HM–9.5





DBT30RM–9.5



材质及电镀	
螺丝	M4.0, 钢, 镀镍
焊脚	铜合金, 镀锡
塑件	PA66, UL94V–0


电气性能		
参考标准	UL	IEC
额定电压	300V	400V
额定电流	20A	24A
使用线径	22–12AWG	2.5mm²
接触电阻	20mΩ	
绝缘电阻	500MΩ/DC500V	
耐电压	AC2000V/1Min	
温度范围	–40℃~+105℃	
扭矩	12.24kgf–cm/1.2Nm/10.6Lbin	

MATERIAL	
Screw	M4.0 Steel Ni plated
Pin Header	Copper alloy, Sn plated
Housing	PA66, UL94V–0

ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	400V
Rated current	20A	24A
Wire range	22–12AWG	2.5mm²
Contact resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1Min	
Temp. range	–40℃~+105℃	
Torque	12.24kgf–cm/1.2Nm/10.6Lbin	




DBT30C–10.0






DBT30S–10.0






DBT30H–10.0





DBT30R–10.0



材质及电镀	
螺丝	M4.0, 钢, 镀镍
焊脚	铜合金, 镀锡
塑件	PA66, UL94V–0


电气性能		
参考标准	UL	IEC
额定电压	300V	400V
额定电流	20A	24A
使用线径	22–12AWG	2.5mm²
接触电阻	20mΩ	
绝缘电阻	500MΩ/DC500V	
耐电压	AC2000V/1Min	
温度范围	–40℃~+105℃	
扭矩	12.24kgf–cm/1.2Nm/10.6Lbin	

MATERIAL	
Screw	M4.0 Steel Ni plated
Pin Header	Copper alloy, Sn plated
Housing	PA66, UL94V–0

ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	400V
Rated current	20A	24A
Wire range	22–12AWG	2.5mm²
Contact resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1Min	
Temp. range	–40℃~+105℃	
Torque	12.24kgf–cm/1.2Nm/10.6Lbin	




DBT30CM–10.0





DBT30SM–10.0

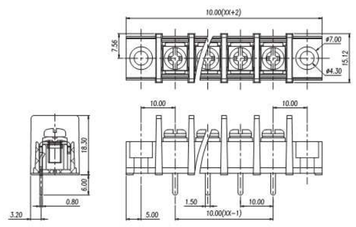

材质及电镀	
螺丝	M4.0, 钢, 镀镍
焊脚	铜合金, 镀锡
塑件	PA66, UL94V–0


电气性能		
参考标准	UL	IEC
额定电压	300V	400V
额定电流	20A	24A
使用线径	22–12AWG	2.5mm²
接触电阻	20mΩ	
绝缘电阻	500MΩ/DC500V	
耐电压	AC2000V/1Min	
温度范围	–40℃~+105℃	
扭矩	12.24kgf–cm/1.2Nm/10.6Lbin	


MATERIAL	
Screw	M4.0 Steel Ni plated
Pin Header	Copper alloy, Sn plated
Housing	PA66, UL94V–0

ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	400V
Rated current	20A	24A
Wire range	22–12AWG	2.5mm²
Contact resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1Min	
Temp. range	–40℃~+105℃	
Torque	12.24kgf–cm/1.2Nm/10.6Lbin	




DBT30HM–10.0



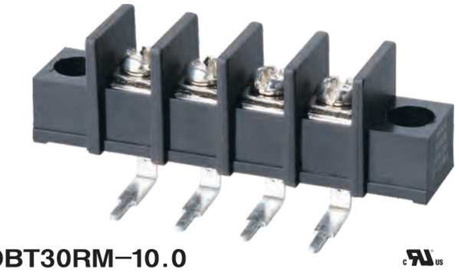

DBT30RM–10.0



材质及电镀	
螺丝	M4.0, 钢, 镀镍
焊脚	铜合金, 镀锡
塑件	PA66, UL94V–0


电气性能		
参考标准	UL	IEC
额定电压	300V	500V
额定电流	20A	32A
使用线径	22–12AWG	4.0mm²
接触电阻	20mΩ	
绝缘电阻	500MΩ/DC500V	
耐电压	AC2000V/1Min	
温度范围	–40℃~+105℃	
扭矩	12.24kgf–cm/1.2Nm/10.6Lbin	

MATERIAL	
Screw	M4.0 Steel Ni plated
Pin Header	Copper alloy, Sn plated
Housing	PA66, UL94V–0

ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	500V
Rated current	20A	32A
Wire range	22–12AWG	4.0mm²
Contact resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1Min	
Temp. range	–40℃~+105℃	
Torque	12.24kgf–cm/1.2Nm/10.6Lbin	




DBT30C–11.0







DBT30S–11.0






DBT30H–11.0



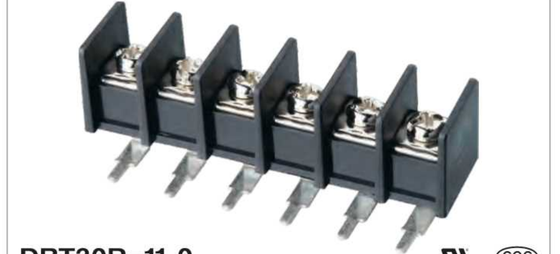

DBT30R–11.0



材质及电镀	
螺丝	M4.0, 钢, 镀镍
焊脚	铜合金, 镀锡
塑件	PA66, UL94V–0


电气性能		
参考标准	UL	IEC
额定电压	300V	500V
额定电流	20A	32A
使用线径	22–12AWG	4.0mm²
接触电阻	20mΩ	
绝缘电阻	500MΩ/DC500V	
耐电压	AC2000V/1Min	
温度范围	–40℃~+105℃	
扭矩	12.24kgf–cm/1.2Nm/10.6Lbin	

MATERIAL	
Screw	M4.0 Steel Ni plated
Pin Header	Copper alloy, Sn plated
Housing	PA66, UL94V–0

ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	500V
Rated current	20A	32A
Wire range	22–12AWG	4.0mm²
Contact resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1Min	
Temp. range	–40℃~+105℃	
Torque	12.24kgf–cm/1.2Nm/10.6Lbin	




DBT30CM–11.0






DBT30SM–11.0





DBT30HM–11.0




材质及电镀	
螺丝	M4.0, 钢, 镀镍
焊脚	铜合金, 镀锡
塑件	PA66, UL94V–0

电气性能		
参考标准	UL	IEC
额定电压	300V	500V
额定电流	20A	32A
使用线径	22–12AWG	4.0mm²
接触电阻	20mΩ	
绝缘电阻	500MΩ/DC500V	
耐电压	AC2000V/1Min	
温度范围	–40℃~+105℃	
扭矩	12.24kgf–cm/1.2Nm/10.6Lbin	



DBT30RM–11.0




MATERIAL	
Screw	M4.0 Steel Ni plated
Pin Header	Copper alloy, Sn plated
Housing	PA66, UL94V–0

ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	500V
Rated current	20A	32A
Wire range	22–12AWG	4.0mm²
Contact resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1Min	
Temp. range	–40℃~+105℃	
Torque	12.24kgf–cm/1.2Nm/10.6Lbin	




DBT30SM–11.0






DBT30SM–11.0





DBT40H–7.62




材质及电镀	
螺丝	M3.0, 钢, 镀镍
焊脚	铜合金, 镀锡
塑件	PA66, UL94V–0

电气性能		
参考标准	UL	IEC
额定电压	300V	400V
额定电流	15A	24A
使用线径	22–14AWG	2.5mm²
接触电阻	20mΩ	
绝缘电阻	500MΩ/DC500V	
耐电压	AC2000V/1Min	
温度范围	–40℃~+105℃	
扭矩	5.10kgf–cm/0.5Nm/4.50Lbin	



DBT40R–7.62




MATERIAL	
Screw	M3.0 Steel Ni plated
Pin Header	Copper alloy, Sn plated
Housing	PA66, UL94V–0

ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	400V
Rated current	15A	24A
Wire range	22–14AWG	2.5mm²
Contact resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1Min	
Temp. range	–40℃~+105℃	
Torque	5.10kgf–cm/0.5Nm/4.50Lbin	




DBT40CM−7.62

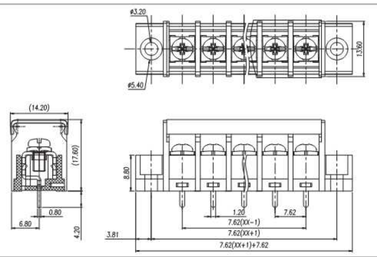




DBT40SM−7.62

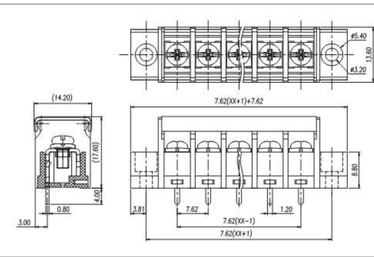




DBT40HM−7.62

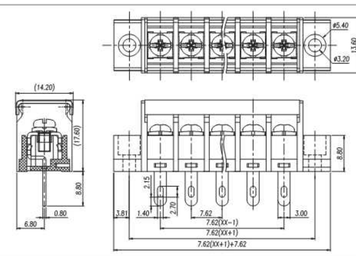



DBT40RM−7.62

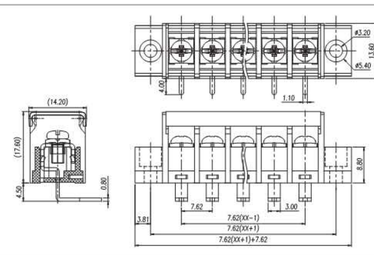

材质及电镀	
螺丝	M3.0, 钢, 镀镍
焊脚	铜合金, 镀锡
塑件	PA66, UL94V−0


电气性能		
参考标准	UL	IEC
额定电压	300V	400V
额定电流	15A	24A
使用线径	22−14AWG	2.5mm²
接触电阻	20mΩ	
绝缘电阻	500MΩ/DC500V	
耐电压	AC2000V/1Min	
温度范围	−40℃~+105℃	
扭矩	5.10kgf−cm/0.5Nm/4.50Lbin	

MATERIAL	
Screw	M3.0 Steel Ni plated
Pin Header	Copper alloy, Sn plated
Housing	PA66, UL94V−0

ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	400V
Rated current	15A	24A
Wire range	22−14AWG	2.5mm²
Contact resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1Min	
Temp. range	−40℃~+105℃	
Torque	5.10kgf−cm/0.5Nm/4.50Lbin	




DBT40C−8.25






DBT40S−8.25

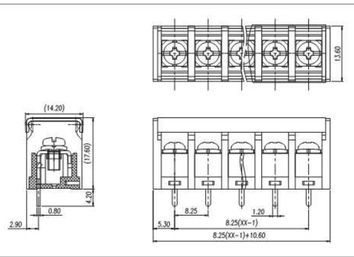




DBT40H−8.25





DBT40R−8.25

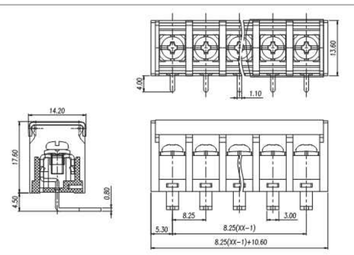

材质及电镀	
螺丝	M3.0, 钢, 镀镍
焊脚	铜合金, 镀锡
塑件	PA66, UL94V−0


电气性能		
参考标准	UL	IEC
额定电压	300V	320V
额定电流	20A	24A
使用线径	22−12AWG	2.5mm²
接触电阻	20mΩ	
绝缘电阻	500MΩ/DC500V	
耐电压	AC2000V/1Min	
温度范围	−40℃~+105℃	
扭矩	5.10kgf−cm/0.5Nm/4.50Lbin	

MATERIAL	
Screw	M3.0 Steel Ni plated
Pin Header	Copper alloy, Sn plated
Housing	PA66, UL94V−0

ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	320V
Rated current	20A	24A
Wire range	22−12AWG	2.5mm²
Contact resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1Min	
Temp. range	−40℃~+105℃	
Torque	5.10kgf−cm/0.5Nm/4.50Lbin	




DBT40CM−8.25






DBT40SM−8.25

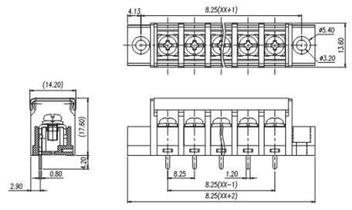




DBT40C−9.5






DBT40S−9.5






DBT40HM−8.25





DBT40RM−8.25

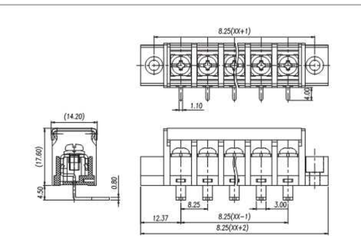

材质及电镀	
螺丝	M3.0, 钢, 镀镍
焊脚	铜合金, 镀锡
塑件	PA66, UL94V−0


电气性能		
参考标准	UL	IEC
额定电压	300V	320V
额定电流	20A	24A
使用线径	22−12AWG	2.5mm²
接触电阻	20mΩ	
绝缘电阻	500MΩ/DC500V	
耐电压	AC2000V/1Min	
温度范围	−40℃~+105℃	
扭矩	5.10kgf−cm/0.5Nm/4.50Lbin	

MATERIAL	
Screw	M3.0 Steel Ni plated
Pin Header	Copper alloy, Sn plated
Housing	PA66, UL94V−0

ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	320V
Rated current	20A	24A
Wire range	22−12AWG	2.5mm²
Contact resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1Min	
Temp. range	−40℃~+105℃	
Torque	5.10kgf−cm/0.5Nm/4.50Lbin	




DBT40H−9.5





DBT40R−9.5



材质及电镀	
螺丝	M4.0, 钢, 镀镍
焊脚	铜合金, 镀锡
塑件	PA66, UL94V−0


电气性能		
参考标准	UL	IEC
额定电压	300V	400V
额定电流	20A	24A
使用线径	22−12AWG	2.5mm²
接触电阻	20mΩ	
绝缘电阻	500MΩ/DC500V	
耐电压	AC2000V/1Min	
温度范围	−40℃~+105℃	
扭矩	12.24kgf−cm/1.2Nm/10.6Lbin	

MATERIAL	
Screw	M4.0 Steel Ni plated
Pin Header	Copper alloy, Sn plated
Housing	PA66, UL94V−0

ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	400V
Rated current	20A	24A
Wire range	22−12AWG	2.5mm²
Contact resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1Min	
Temp. range	−40℃~+105℃	
Torque	12.24kgf−cm/1.2Nm/10.6Lbin	




DBT40CM–9.5






DBT40SM–9.5






DBT40HM–9.5





DBT40RM–9.5



材质及电镀	
螺丝	M4.0, 钢, 镀镍
焊脚	铜合金, 镀锡
塑件	PA66, UL94V–0


电气性能		
参考标准	UL	IEC
额定电压	300V	400V
额定电流	20A	24A
使用线径	22–12AWG	2.5mm²
接触电阻	20mΩ	
绝缘电阻	500MΩ/DC500V	
耐电压	AC2000V/1Min	
温度范围	–40℃~+105℃	
扭矩	12.24kgf–cm/1.2Nm/10.6Lbin	

MATERIAL	
Screw	M4.0 Steel Ni plated
Pin Header	Copper alloy, Sn plated
Housing	PA66, UL94V–0

ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	400V
Rated current	20A	24A
Wire range	22–12AWG	2.5mm²
Contact resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1Min	
Temp. range	–40℃~+105℃	
Torque	12.24kgf–cm/1.2Nm/10.6Lbin	




DBT40C–10.0







DBT40S–10.0



DBT40H–10.0



DBT40R–10.0



材质及电镀	
螺丝	M4.0, 钢, 镀镍
焊脚	铜合金, 镀锡
塑件	PA66, UL94V–0


电气性能		
参考标准	UL	IEC
额定电压	300V	400V
额定电流	20A	24A
使用线径	22–12AWG	2.5mm²
接触电阻	20mΩ	
绝缘电阻	500MΩ/DC500V	
耐电压	AC2000V/1Min	
温度范围	–40℃~+105℃	
扭矩	12.24kgf–cm/1.2Nm/10.6Lbin	

MATERIAL	
Screw	M4.0 Steel Ni plated
Pin Header	Copper alloy, Sn plated
Housing	PA66, UL94V–0

ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	400V
Rated current	20A	24A
Wire range	22–12AWG	2.5mm²
Contact resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1Min	
Temp. range	–40℃~+105℃	
Torque	12.24kgf–cm/1.2Nm/10.6Lbin	




DBT40CM–10.0






DBT40SM–10.0






DBT40C–11.0






DBT40S–11.0






DBT40HM–10.0






DBT40RM–10.0






DBT40H–11.0





DBT40R–11.0



材质及电镀	
螺丝	M4.0, 钢, 镀镍
焊脚	铜合金, 镀锡
塑件	PA66, UL94V–0

电气性能		
参考标准	UL	IEC
额定电压	300V	400V
额定电流	20A	24A
使用线径	22–12AWG	2.5mm²
接触电阻	20mΩ	
绝缘电阻	500MΩ/DC500V	
耐电压	AC2000V/1Min	
温度范围	–40℃~+105℃	
扭矩	12.24kgf–cm/1.2Nm/10.6Lbin	

MATERIAL	
Screw	M4.0 Steel Ni plated
Pin Header	Copper alloy, Sn plated
Housing	PA66, UL94V–0

ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	400V
Rated current	20A	24A
Wire range	22–12AWG	2.5mm²
Contact resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1Min	
Temp. range	–40℃~+105℃	
Torque	12.24kgf–cm/1.2Nm/10.6Lbin	

材质及电镀	
螺丝	M4.0, 钢, 镀镍
焊脚	铜合金, 镀锡
塑件	PA66, UL94V–0


电气性能		
参考标准	UL	IEC
额定电压	300V	500V
额定电流	20A	24A
使用线径	22–12AWG	2.5mm²
接触电阻	20mΩ	
绝缘电阻	500MΩ/DC500V	
耐电压	AC2000V/1Min	
温度范围	–40℃~+105℃	
扭矩	12.24kgf–cm/1.2Nm/10.6Lbin	

MATERIAL	
Screw	M4.0 Steel Ni plated
Pin Header	Copper alloy, Sn plated
Housing	PA66, UL94V–0

ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	500V
Rated current	20A	24A
Wire range	22–12AWG	2.5mm²
Contact resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1Min	
Temp. range	–40℃~+105℃	
Torque	12.24kgf–cm/1.2Nm/10.6Lbin	




DBT40CM–11.0






DBT40SM–11.0

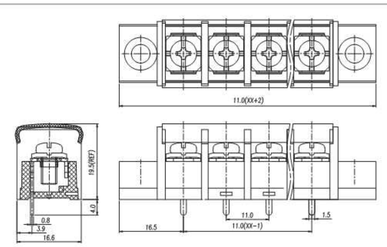




DBT40C–13.0

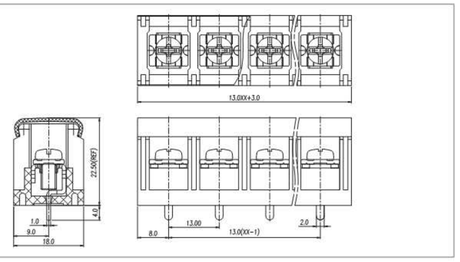




DBT40S–13.0





DBT40HM–11.0

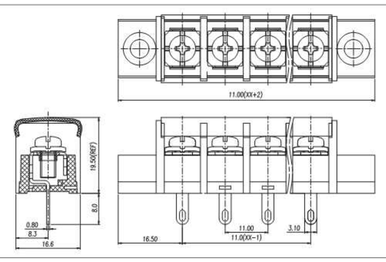


材质及电镀	
螺丝	M4.0, 钢, 镀镍
焊脚	铜合金, 镀锡
塑件	PA66, UL94V–0

电气性能		
参考标准	UL	IEC
额定电压	300V	500V
额定电流	20A	24A
使用线径	22–12AWG	2.5mm²
接触电阻	20mΩ	
绝缘电阻	500MΩ/DC500V	
耐电压	AC2000V/1Min	
温度范围	–40℃~+105℃	
扭矩	12.24kgf–cm/1.2Nm/10.6Lbin	



DBT40RM–11.0

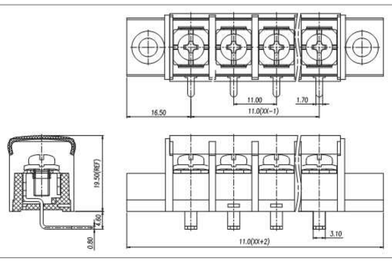


MATERIAL	
Screw	M4.0 Steel Ni plated
Pin Header	Copper alloy, Sn plated
Housing	PA66, UL94V–0

ELECTRICAL		
Standard	UL	IEC
Rated voltage	300V	500V
Rated current	20A	24A
Wire range	22–12AWG	2.5mm²
Contact resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1Min	
Temp. range	–40℃~+105℃	
Torque	12.24kgf–cm/1.2Nm/10.6Lbin	



DBT40H–13.0




材质及电镀	
螺丝	M4.0, 钢, 镀镍
焊脚	铜合金, 镀锡
塑件	PA66, UL94V–0

电气性能		
参考标准	UL	IEC
额定电压	600V	630V
额定电流	40A	41A
使用线径	18–10AWG	6.0mm²
接触电阻	20mΩ	
绝缘电阻	500MΩ/DC500V	
耐电压	AC2000V/1Min	
温度范围	–40℃~+105℃	
扭矩	12.24kgf–cm/1.2Nm/10.6Lbin	



DBT40R–13.0




MATERIAL	
Screw	M4.0 Steel Ni plated
Pin Header	Copper alloy, Sn plated
Housing	PA66, UL94V–0

ELECTRICAL		
Standard	UL	IEC
Rated voltage	600V	630V
Rated current	40A	41A
Wire range	18–10AWG	6.0mm²
Contact resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1Min	
Temp. range	–40℃~+105℃	
Torque	12.24kgf–cm/1.2Nm/10.6Lbin	




DBT40CM–13.0

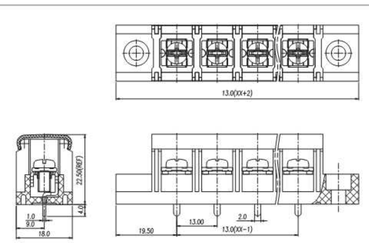




DBT40SM–13.0

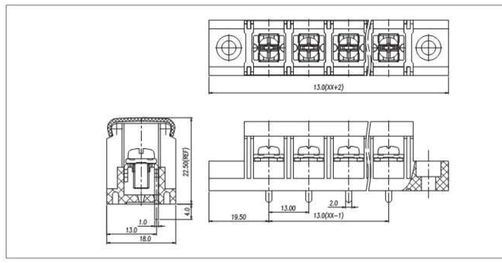




DBT40HM–13.0

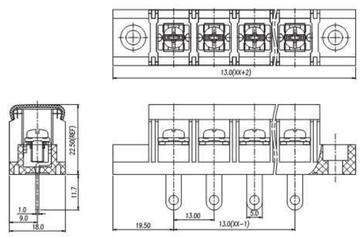

材质及电镀	
螺丝	M4.0, 钢, 镀镍
焊脚	铜合金, 镀锡
塑件	PA66, UL94V–0

电气性能		
参考标准	UL	IEC
额定电压	600V	630V
额定电流	40A	41A
使用线径	18–10AWG	6.0mm²
接触电阻	20mΩ	
绝缘电阻	500MΩ/DC500V	
耐电压	AC2000V/1Min	
温度范围	–40℃~+105℃	
扭矩	12.24kgf–cm/1.2Nm/10.6Lbin	

DBT40RM–13.0

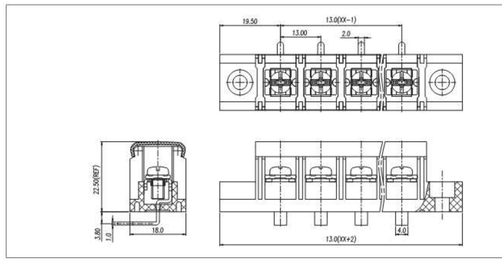

MATERIAL	
Screw	M4.0 Steel Ni plated
Pin Header	Copper alloy, Sn plated
Housing	PA66, UL94V–0

ELECTRICAL		
Standard	UL	IEC
Rated voltage	600V	630V
Rated current	40A	41A
Wire range	18–10AWG	6.0mm²
Contact resistance	20mΩ	
Insulation resistance	500MΩ/DC500V	
Withstanding voltage	AC2000V/1Min	
Temp. range	–40℃~+105℃	
Torque	12.24kgf–cm/1.2Nm/10.6Lbin	



Pitch:7.62mm

DB06



Pitch:6.35mm

DBT50–6.35




Pitch:6.35mm

DBT50R–6.35


认证/CERTIFICATION	
材质及电镀	
螺丝	M3,钢，镀镍
焊脚	铜合金,镀锡
塑件	PA66，UL94V–0
电气性能	
参考标准	UL IEC
额定电压	300V 250V
额定电流	15A 24A
使用线径	22–14AWG 2.5mm²
接触电阻	20mΩ
绝缘电阻	500MΩ/DC500V
耐电压	AC2000V/1Min
机械性能	
温度范围	-40℃~+105℃
扭矩	5.1kgf–cm/0.5Nm/4.43Lbin

MATERIAL	
Screw	M3, Steel ,Ni plated
Pin Herder	Copper alloy, Sn Plated
Housing	PA66,UL94V–0
ELECTRICAL	
Standard	UL IEC
Rated voltage	300V 250V
Rated current	15A 24A
Wire range	22–14AWG 2.5mm²
Contact resistance	20mΩ
Insulation resistance	500MΩ/DC500V
Withstanding voltage	AC2000V/1Min
MECHANICAL	
Temp. range	-40℃~+105℃
Torque	5.1kgf–cm/0.5Nm/4.43Lbin




认证/CERTIFICATION	
材质及电镀	
螺丝	M3,钢，镀镍
焊脚	铜合金,镀锡
塑件	PA66，UL94V–0
电气性能	
参考标准	UL IEC
额定电压	300V 250V
额定电流	10A 17.5A
使用线径	22–16AWG 1.5mm²
接触电阻	20mΩ
绝缘电阻	500MΩ/DC500V
耐电压	AC2000V/1Min
机械性能	
温度范围	–40℃~+105℃
扭矩	5.1kgf–cm/0.5Nm/4.43Lbin

MATERIAL	
Screw	M3, Steel,Ni plated
Pin Herder	Copper alloy, Sn Plated
Housing	PA66,UL94V–0
ELECTRICAL	
Standard	UL IEC
Rated voltage	300V 250V
Rated current	10A 17.5A
Wire range	22–16AWG 1.5mm²
Contact resistance	20mΩ
Insulation resistance	500MΩ/DC500V
Withstanding voltage	AC2000V/1Min
MECHANICAL	
Temp. range	–40℃~+105℃
Torque	5.1kgf–cm/0.5Nm/4.43Lbin



认证/CERTIFICATION	
材质及电镀	
螺丝	M3,钢，镀镍
焊脚	铜合金,镀锡
塑件	PA66，UL94V–0
电气性能	
参考标准	UL IEC
额定电压	300V 250V
额定电流	10A 17.5A
使用线径	22–16AWG 1.5mm²
接触电阻	20mΩ
绝缘电阻	500MΩ/DC500V
耐电压	AC2000V/1Min
机械性能	
温度范围	–40℃~+105℃
扭矩	5.1kgf–cm/0.5Nm/4.43Lbin

MATERIAL	
Screw	M3.0 Steel Ni plated
Pin Herder	Copper alloy, Sn Plated
Housing	PA66, UL94V–0
ELECTRICAL	
Standard	UL IEC
Rated voltage	300V 250V
Rated current	10A 17.5A
Wire range	22–16AWG 1.5mm²
Contact resistance	20mΩ
Insulation resistance	500MΩ/DC500V
Withstanding voltage	AC2000V/1Min
MECHANICAL	
Temp. range	–40℃~+105℃
Torque	5.1kgf–cm/0.5Nm/4.43Lbin

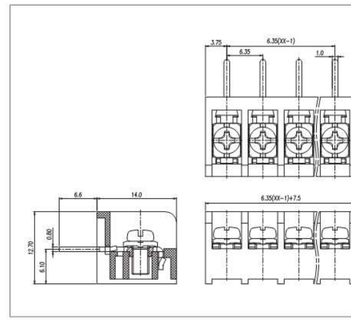




Pitch:6.35mm

DBT50G–6.35

认证/CERTIFICATION	
材质及电镀	
螺丝	M3,钢，镀镍
焊脚	铜合金,镀锡
塑件	PA66，UL94V–0
电气性能	
参考标准	UL / IEC
额定电压	300V / 250V
额定电流	10A / 17.5A
使用线径	22–16AWG / 1.5mm²
接触电阻	20mΩ
绝缘电阻	500MΩ/DC500V
耐电压	AC2000V/1Min
机械性能	
温度范围	–40℃~+105℃
扭矩	5.1kgf–cm/0.5Nm/4.43Lbin

MATERIAL	
Screw	M3.0 Steel Ni plated
Pin Herder	Copper alloy, Sn Plated
Housing	PA66, UL94V–0
ELECTRICAL	
Standard	UL / IEC
Rated voltage	300V / 250V
Rated current	10A / 17.5A
Wire range	22–16AWG / 1.5mm²
Contact resistance	20mΩ
Insulation resistance	500MΩ/DC500V
Withstanding voltage	AC2000V/1Min
MECHANICAL	
Temp. range	–40℃~+105℃
Torque	5.1kgf–cm/0.5Nm/4.43Lbin

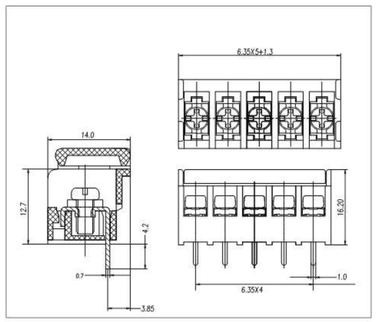




Pitch:7.62mm

DBT50–7.62

认证/CERTIFICATION	
材质及电镀	
螺丝	M3,钢，镀镍
焊脚	铜合金,镀锡
塑件	PA66，UL94V–0
电气性能	
参考标准	UL / IEC
额定电压	300V / 400V
额定电流	20A / 24A
使用线径	22–12AWG / 4.0mm²
接触电阻	20mΩ
绝缘电阻	500MΩ/DC500V
耐电压	AC2000V/1Min
机械性能	
温度范围	–40℃~+105℃
扭矩	5.1kgf–cm/0.5Nm/4.43Lbin

MATERIAL	
Screw	M3.0 Steel Ni plated
Pin Herder	Copper alloy, Sn Plated
Housing	PA66, UL94V–0
ELECTRICAL	
Standard	UL / IEC
Rated voltage	300V / 450V
Rated current	20A / 24A
Wire range	22–12AWG / 4.0mm²
Contact resistance	20mΩ
Insulation resistance	500MΩ/DC500V
Withstanding voltage	AC2000V/1Min
MECHANICAL	
Temp. range	–40℃~+105℃
Torque	5.1kgf–cm/0.5Nm/4.43Lbin

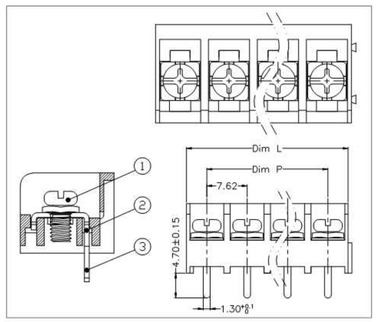




Pitch:8.25mm

DBT50–8.25

认证/CERTIFICATION	
材质及电镀	
螺丝	M3,钢，镀镍
焊脚	铜合金,镀锡
塑件	PA66，UL94V–0
电气性能	
参考标准	UL / IEC
额定电压	300V / 400V
额定电流	20A / 24A
使用线径	22–12AWG / 4.0mm²
接触电阻	20mΩ
绝缘电阻	500MΩ/DC500V
耐电压	AC2000V/1Min
机械性能	
温度范围	–40℃~+105℃
扭矩	5.1kgf–cm/0.5Nm/4.43Lbin

MATERIAL	
Screw	M3.0 Steel Ni plated
Pin Herder	Copper alloy, Sn Plated
Housing	PA66, UL94V–0
ELECTRICAL	
Standard	UL / IEC
Rated voltage	300V / 450V
Rated current	20A / 24A
Wire range	22–12AWG / 4.0mm²
Contact resistance	20mΩ
Insulation resistance	500MΩ/DC500V
Withstanding voltage	AC2000V/1Min
MECHANICAL	
Temp. range	–40℃~+105℃
Torque	5.1kgf–cm/0.5Nm/4.43Lbin

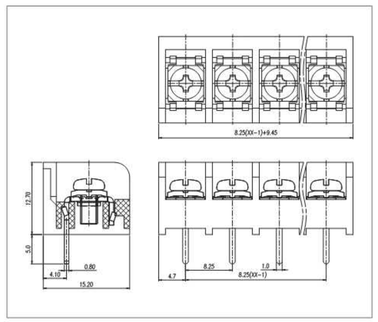




Pitch:8.25mm

DBT50SG–8.25

认证/CERTIFICATION	
材质及电镀	
螺丝	M3,钢，镀镍
焊脚	铜合金,镀锡
塑件	PA66，UL94V–0
电气性能	
参考标准	UL / IEC
额定电压	300V / 400V
额定电流	20A / 24A
使用线径	22–12AWG / 4.0mm²
接触电阻	20mΩ
绝缘电阻	500MΩ/DC500V
耐电压	AC2000V/1Min
机械性能	
温度范围	–40℃~+105℃
扭矩	5.1kgf–cm/0.5Nm/4.43Lbin

MATERIAL	
Screw	M3.0 Steel Ni plated
Pin Herder	Copper alloy, Sn Plated
Housing	PA66, UL94V–0
ELECTRICAL	
Standard	UL / IEC
Rated voltage	300V / 450V
Rated current	20A / 24A
Wire range	22–12AWG / 4.0mm²
Contact resistance	20mΩ
Insulation resistance	500MΩ/DC500V
Withstanding voltage	AC2000V/1Min
MECHANICAL	
Temp. range	–40℃~+105℃
Torque	5.1kgf–cm/0.5Nm/4.43Lbin

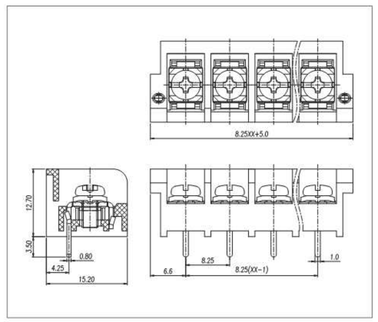




Pitch:8.25mm

DBT50R–8.25

认证/CERTIFICATION	
材质及电镀	
螺丝	M3,钢，镀镍
焊脚	铜合金,镀锡
塑件	PA66，UL94V–0
电气性能	
参考标准	UL / IEC
额定电压	300V / 450V
额定电流	20A / 24A
使用线径	22–12AWG / 4.0mm²
接触电阻	20mΩ
绝缘电阻	500MΩ/DC500V
耐电压	AC2000V/1Min
机械性能	
温度范围	–40℃~+105℃
扭矩	5.1kgf–cm/0.5Nm/4.43Lbin

MATERIAL	
Screw	M3.0 Steel Ni plated
Pin Herder	Copper alloy, Sn Plated
Housing	PA66, UL94V–0
ELECTRICAL	
Standard	UL / IEC
Rated voltage	300V / 450V
Rated current	20A / 24A
Wire range	22–12AWG / 4.0mm²
Contact resistance	20mΩ
Insulation resistance	500MΩ/DC500V
Withstanding voltage	AC2000V/1Min
MECHANICAL	
Temp. range	–40℃~+105℃
Torque	5.1kgf–cm/0.5Nm/4.43Lbin

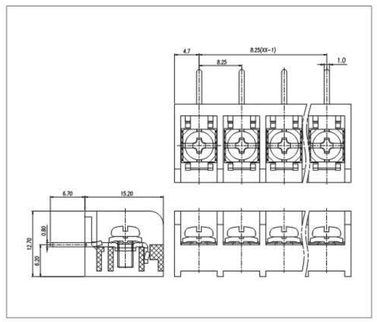




Pitch:8.25mm

DBT50G–8.25

认证/CERTIFICATION	
材质及电镀	
螺丝	M3,钢，镀镍
焊脚	铜合金,镀锡
塑件	PA66，UL94V–0
电气性能	
参考标准	UL / IEC
额定电压	300V / 450V
额定电流	20A / 24A
使用线径	22–12AWG / 4.0mm²
接触电阻	20mΩ
绝缘电阻	500MΩ/DC500V
耐电压	AC2000V/1Min
机械性能	
温度范围	–40℃~+105℃
扭矩	5.1kgf–cm/0.5Nm/4.43Lbin

MATERIAL	
Screw	M3.0 Steel Ni plated
Pin Herder	Copper alloy, Sn Plated
Housing	PA66, UL94V–0
ELECTRICAL	
Standard	UL / IEC
Rated voltage	300V / 450V
Rated current	20A / 24A
Wire range	22–12AWG / 4.0mm²
Contact resistance	20mΩ
Insulation resistance	500MΩ/DC500V
Withstanding voltage	AC2000V/1Min
MECHANICAL	
Temp. range	–40℃~+105℃
Torque	5.1kgf–cm/0.5Nm/4.43Lbin

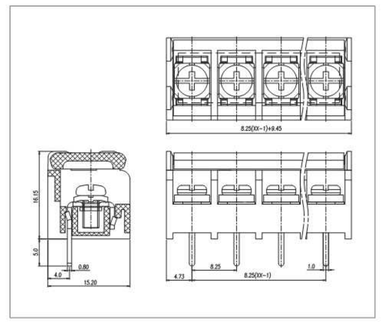




Pitch:9.5mm

DBT50B–9.5

认证/CERTIFICATION	
材质及电镀	
螺丝	M4.0, 钢 镀镍
焊脚	铜合金, 镀锡
塑件	PA66, UL94V–0
电气性能	
参考标准	UL / IEC
额定电压	300V / 400V
额定电流	20A / 24A
使用线径	22–12AWG / 4.0mm²
接触电阻	20mΩ
绝缘电阻	500MΩ/DC500V
耐电压	AC2000V/1Min
机械性能	
温度范围	–40℃~+105℃
扭矩	12.24kgf–cm/1.2Nm/10.6Lbin

MATERIAL	
Screw	M4.0 Steel Ni plated
Pin Herder	Copper alloy, Sn Plated
Housing	PA66, UL94V–0
ELECTRICAL	
Standard	UL / IEC
Rated voltage	300V / 750V
Rated current	20A / 32A
Wire range	22–12AWG / 4.0mm²
Contact resistance	20mΩ
Insulation resistance	500MΩ/DC500V
Withstanding voltage	AC2000V/1Min
MECHANICAL	
Temp. range	–40℃~+105℃
Torque	12.24kgf–cm/1.2Nm/10.6Lbin






Pitch:9.5mm

DBT50SG–9.5

认证/CERTIFICATION	
材质及电镀	
螺丝	M4.0, 钢 镀镍
焊脚	铜合金, 镀锡
塑件	PA66, UL94V–0
电气性能	
参考标准	UL / IEC
额定电压	300V / 400V
额定电流	20A / 24A
使用线径	22–12AWG / 4.0mm²
接触电阻	20mΩ
绝缘电阻	500MΩ/DC500V
耐电压	AC2000V/1Min
机械性能	
温度范围	–40℃~+105℃
扭矩	12.24kgf–cm/1.2Nm/10.6Lbin

MATERIAL	
Screw	M4.0 Steel Ni plated
Pin Herder	Copper alloy, Sn Plated
Housing	PA66, UL94V–0
ELECTRICAL	
Standard	UL / IEC
Rated voltage	300V / 750V
Rated current	20A / 32A
Wire range	22–12AWG / 4.0mm²
Contact resistance	20mΩ
Insulation resistance	500MΩ/DC500V
Withstanding voltage	AC2000V/1Min
MECHANICAL	
Temp. range	–40℃~+105℃
Torque	12.24kgf–cm/1.2Nm/10.6Lbin

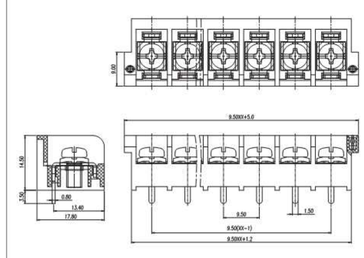




Pitch:9.5mm

DBT50R–9.5

认证/CERTIFICATION	
材质及电镀	
螺丝	M4.0, 钢 镀镍
焊脚	铜合金, 镀锡
塑件	PA66, UL94V–0
电气性能	
参考标准	UL / IEC
额定电压	300V / 400V
额定电流	20A / 24A
使用线径	22–12AWG / 4.0mm²
接触电阻	20mΩ
绝缘电阻	500MΩ/DC500V
耐电压	AC2000V/1Min
机械性能	
温度范围	–40℃~+105℃
扭矩	12.24kgf–cm/1.2Nm/10.6Lbin

MATERIAL	
Screw	M4.0 Steel Ni plated
Pin Herder	Copper alloy, Sn Plated
Housing	PA66, UL94V–0
ELECTRICAL	
Standard	UL / IEC
Rated voltage	300V / 750V
Rated current	20A / 32A
Wire range	22–12AWG / 4.0mm²
Contact resistance	20mΩ
Insulation resistance	500MΩ/DC500V
Withstanding voltage	AC2000V/1Min
MECHANICAL	
Temp. range	–40℃~+105℃
Torque	12.24kgf–cm/1.2Nm/10.6Lbin

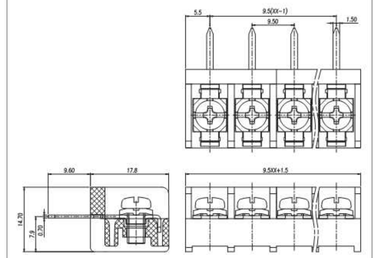




Pitch:9.5mm

DBT50G–9.5

认证/CERTIFICATION	
材质及电镀	
螺丝	M4.0, 钢 镀镍
焊脚	铜合金, 镀锡
塑件	PA66, UL94V–0
电气性能	
参考标准	UL / IEC
额定电压	300V / 400V
额定电流	20A / 24A
使用线径	22–12AWG / 4.0mm²
接触电阻	20mΩ
绝缘电阻	500MΩ/DC500V
耐电压	AC2000V/1Min
机械性能	
温度范围	–40℃~+105℃
扭矩	12.24kgf–cm/1.2Nm/10.6Lbin

MATERIAL	
Screw	M4.0 Steel Ni plated
Pin Herder	Copper alloy, Sn Plated
Housing	PA66, UL94V–0
ELECTRICAL	
Standard	UL / IEC
Rated voltage	300V / 750V
Rated current	20A / 32A
Wire range	22–12AWG / 4.0mm²
Contact resistance	20mΩ
Insulation resistance	500MΩ/DC500V
Withstanding voltage	AC2000V/1Min
MECHANICAL	
Temp. range	–40℃~+105℃
Torque	12.24kgf–cm/1.2Nm/10.6Lbin

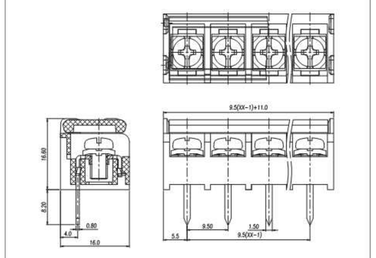




Pitch:9.5mm

DBT50RG–9.5

认证/CERTIFICATION	
材质及电镀	
螺丝	M4.0, 钢 镀镍
焊脚	铜合金, 镀锡
塑件	PA66, UL94V–0
电气性能	
参考标准	UL / IEC
额定电压	300V / 400V
额定电流	20A / 24A
使用线径	22–12AWG / 4.0mm²
接触电阻	20mΩ
绝缘电阻	500MΩ/DC500V
耐电压	AC2000V/1Min
机械性能	
温度范围	–40℃~+105℃
扭矩	12.24kgf–cm/1.2Nm/10.6Lbin

MATERIAL	
Screw	M4.0 Steel Ni plated
Pin Herder	Copper alloy, Sn Plated
Housing	PA66, UL94V–0
ELECTRICAL	
Standard	UL / IEC
Rated voltage	300V / 750V
Rated current	20A / 32A
Wire range	22–12AWG / 4.0mm²
Contact resistance	20mΩ
Insulation resistance	500MΩ/DC500V
Withstanding voltage	AC2000V/1Min
MECHANICAL	
Temp. range	–40℃~+105℃
Torque	12.24kgf–cm/1.2Nm/10.6Lbin

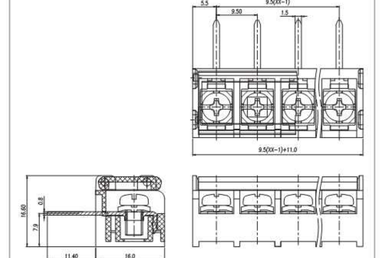




Pitch:9.5mm

DBT50XG–9.5

认证/CERTIFICATION	
材质及电镀	
螺丝	M4.0, 钢 镀镍
焊脚	铜合金, 镀锡
塑件	PA66, UL94V–0
电气性能	
参考标准	UL / IEC
额定电压	300V / 400V
额定电流	20A / 24A
使用线径	22–12AWG / 4.0mm²
接触电阻	20mΩ
绝缘电阻	500MΩ/DC500V
耐电压	AC2000V/1Min
机械性能	
温度范围	–40℃~+105℃
扭矩	12.24kgf–cm/1.2Nm/10.6Lbin

MATERIAL	
Screw	M4.0 Steel Ni plated
Pin Herder	Copper alloy, Sn Plated
Housing	PA66, UL94V–0
ELECTRICAL	
Standard	UL / IEC
Rated voltage	300V / 750V
Rated current	20A / 32A
Wire range	22–12AWG / 4.0mm²
Contact resistance	20mΩ
Insulation resistance	500MΩ/DC500V
Withstanding voltage	AC2000V/1Min
MECHANICAL	
Temp. range	–40℃~+105℃
Torque	12.24kgf–cm/1.2Nm/10.6Lbin

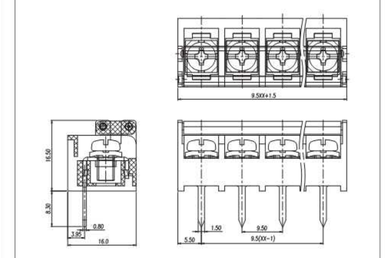




Pitch:9.5mm

DBT50GG–9.5

认证/CERTIFICATION	
材质及电镀	
螺丝	M4.0, 钢 镀镍
焊脚	铜合金, 镀锡
塑件	PA66, UL94V–0
电气性能	
参考标准	UL / IEC
额定电压	300V / 400V
额定电流	20A / 24A
使用线径	22–12AWG / 4.0mm²
接触电阻	20mΩ
绝缘电阻	500MΩ/DC500V
耐电压	AC2000V/1Min
机械性能	
温度范围	–40℃~+105℃
扭矩	12.24kgf–cm/1.2Nm/10.6Lbin

MATERIAL	
Screw	M4.0 Steel Ni plated
Pin Herder	Copper alloy, Sn Plated
Housing	PA66, UL94V–0
ELECTRICAL	
Standard	UL / IEC
Rated voltage	300V / 750V
Rated current	20A / 32A
Wire range	22–12AWG / 4.0mm²
Contact resistance	20mΩ
Insulation resistance	500MΩ/DC500V
Withstanding voltage	AC2000V/1Min
MECHANICAL	
Temp. range	–40℃~+105℃
Torque	12.24kgf–cm/1.2Nm/10.6Lbin






Pitch:11.1mm

DBT50–11.1

认证/CERTIFICATION	
材质及电镀	
螺丝	M4.0, 钢 镀镍
焊脚	铜合金, 镀锡
塑件	PA66, UL94V–0
电气性能	
参考标准	UL / IEC
额定电压	300V / 500V
额定电流	20A / 32A
使用线径	22–12AWG / 4.0mm²
接触电阻	20mΩ
绝缘电阻	500MΩ/DC500V
耐电压	AC2000V/1Min
机械性能	
温度范围	–40℃~+105℃
扭矩	12.24kgf–cm/1.2Nm/10.6Lbin

MATERIAL	
Screw	M4.0 Steel Ni plated
Pin Herder	Copper alloy, Sn Plated
Housing	PA66, UL94V–0
ELECTRICAL	
Standard	UL / IEC
Rated voltage	300V / 750V
Rated current	20A / 32A
Wire range	22–12AWG / 4.0mm²
Contact resistance	20mΩ
Insulation resistance	500MΩ/DC500V
Withstanding voltage	AC2000V/1Min
MECHANICAL	
Temp. range	–40℃~+105℃
Torque	12.24kgf–cm/1.2Nm/10.6Lbin






Pitch:9.5mm

DBT50–9.5

认证/CERTIFICATION	
材质及电镀	
螺丝	M3,钢，镀镍
焊脚	铜合金, 镀锡
塑件	PA66，UL94V–0
电气性能	
参考标准	UL / IEC
额定电压	300V / 400V
额定电流	20A / 24A
使用线径	22–12AWG / 4.0mm²
接触电阻	20mΩ
绝缘电阻	500MΩ/DC500V
耐电压	AC2000V/1Min
机械性能	
温度范围	–40℃~+105℃
扭矩	5.1kgf–cm/0.5Nm/4.43Lbin

MATERIAL	
Screw	M3.0 Steel Ni plated
Pin Herder	Copper alloy, Sn Plated
Housing	PA66, UL94V–0
ELECTRICAL	
Standard	UL / IEC
Rated voltage	300V / 450V
Rated current	20A / 24A
Wire range	22–12AWG / 4.0mm²
Contact resistance	20mΩ
Insulation resistance	500MΩ/DC500V
Withstanding voltage	AC2000V/1Min
MECHANICAL	
Temp. range	–40℃~+105℃
Torque	5.1kgf–cm/0.5Nm/4.43Lbin

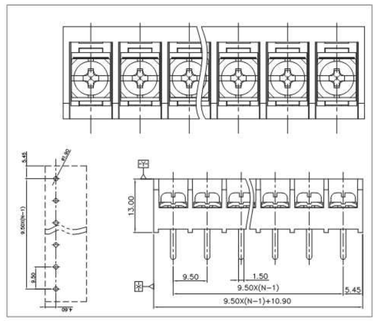




Pitch:7.62mm

DBT10–7.62

认证/CERTIFICATION	
材质及电镀	
螺丝	M3.0, 钢 镀镍
焊脚	铜合金, 镀锡
塑件	PA66, UL94V–0
电气性能	
参考标准	UL / IEC
额定电压	300V / 450V
额定电流	15A / 17.5A
使用线径	22–14AWG / 1.5mm²
接触电阻	20mΩ
绝缘电阻	500MΩ/DC500V
耐电压	AC2000V/1Min
机械性能	
温度范围	–40℃~+105℃
扭矩	5.1kgf–cm/0.5Nm/4.43Lbin

MATERIAL	
Screw	M3.0 Steel Ni plated
Pin Herder	Copper alloy, Sn Plated
Housing	PA66, UL94V–0
ELECTRICAL	
Standard	UL / IEC
Rated voltage	300V / 450V
Rated current	15A / 17.5A
Wire range	22–14AWG / 1.5mm²
Contact resistance	20mΩ
Insulation resistance	500MΩ/DC500V
Withstanding voltage	AC2000V/1Min
MECHANICAL	
Temp. range	–40℃~+105℃
Torque	5.1kgf–cm/0.5Nm/4.43Lbin

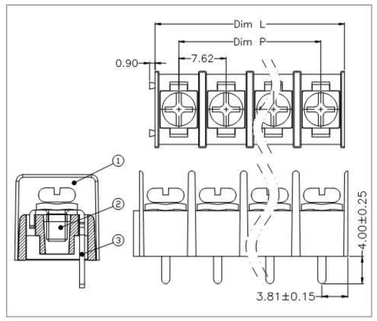




Pitch:8.5mm

DBT10–8.5

认证/CERTIFICATION	
材质及电镀	
螺丝	M3.0, 钢 镀镍
焊脚	铜合金, 镀锡
塑件	PA66, UL94V–0
电气性能	
参考标准	UL / IEC
额定电压	300V / 450V
额定电流	15A / 17.5A
使用线径	22–14AWG / 1.5mm²
接触电阻	20mΩ
绝缘电阻	500MΩ/DC500V
耐电压	AC2000V/1Min
机械性能	
温度范围	–40℃~+105℃
扭矩	5.1kgf–cm/0.5Nm/4.43Lbin

MATERIAL	
Screw	M3.0 Steel Ni plated
Pin Herder	Copper alloy, Sn Plated
Housing	PA66, UL94V–0
ELECTRICAL	
Standard	UL / IEC
Rated voltage	300V / 450V
Rated current	15A / 17.5A
Wire range	22–14AWG / 1.5mm²
Contact resistance	20mΩ
Insulation resistance	500MΩ/DC500V
Withstanding voltage	AC2000V/1Min
MECHANICAL	
Temp. range	–40℃~+105℃
Torque	5.1kgf–cm/0.5Nm/4.43Lbin

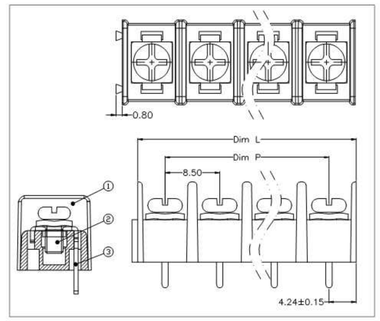



Pitch:7.62mm

DBT50G–7.62

认证/CERTIFICATION	
材质及电镀	
螺丝	M3,钢，镀镍
焊脚	铜合金, 镀锡
塑件	PA66，UL94V–0
电气性能	
参考标准	UL / IEC
额定电压	300V / 450V
额定电流	20A / 24A
使用线径	22–12AWG / 4.0mm²
接触电阻	20mΩ
绝缘电阻	500MΩ/DC500V
耐电压	AC2000V/1Min
机械性能	
温度范围	–40℃~+105℃
扭矩	5.1kgf–cm/0.5Nm/4.43Lbin

MATERIAL	
Screw	M3.0 Steel Ni plated
Pin Herder	Copper alloy, Sn Plated
Housing	PA66, UL94V–0
ELECTRICAL	
Standard	UL / IEC
Rated voltage	300V / 450V
Rated current	20A / 24A
Wire range	22–12AWG / 4.0mm²
Contact resistance	20mΩ
Insulation resistance	500MΩ/DC500V
Withstanding voltage	AC2000V/1Min
MECHANICAL	
Temp. range	–40℃~+105℃
Torque	5.1kgf–cm/0.5Nm/4.43Lbin

