


# DORABO

## Product Search

Shrapnel terminal block/ Plug-In terminal block/Lifting terminal block/Barrier terminal block  
Spring-type terminal block/Feed-through terminal block/ Rail terminal block/Wiring terminal block

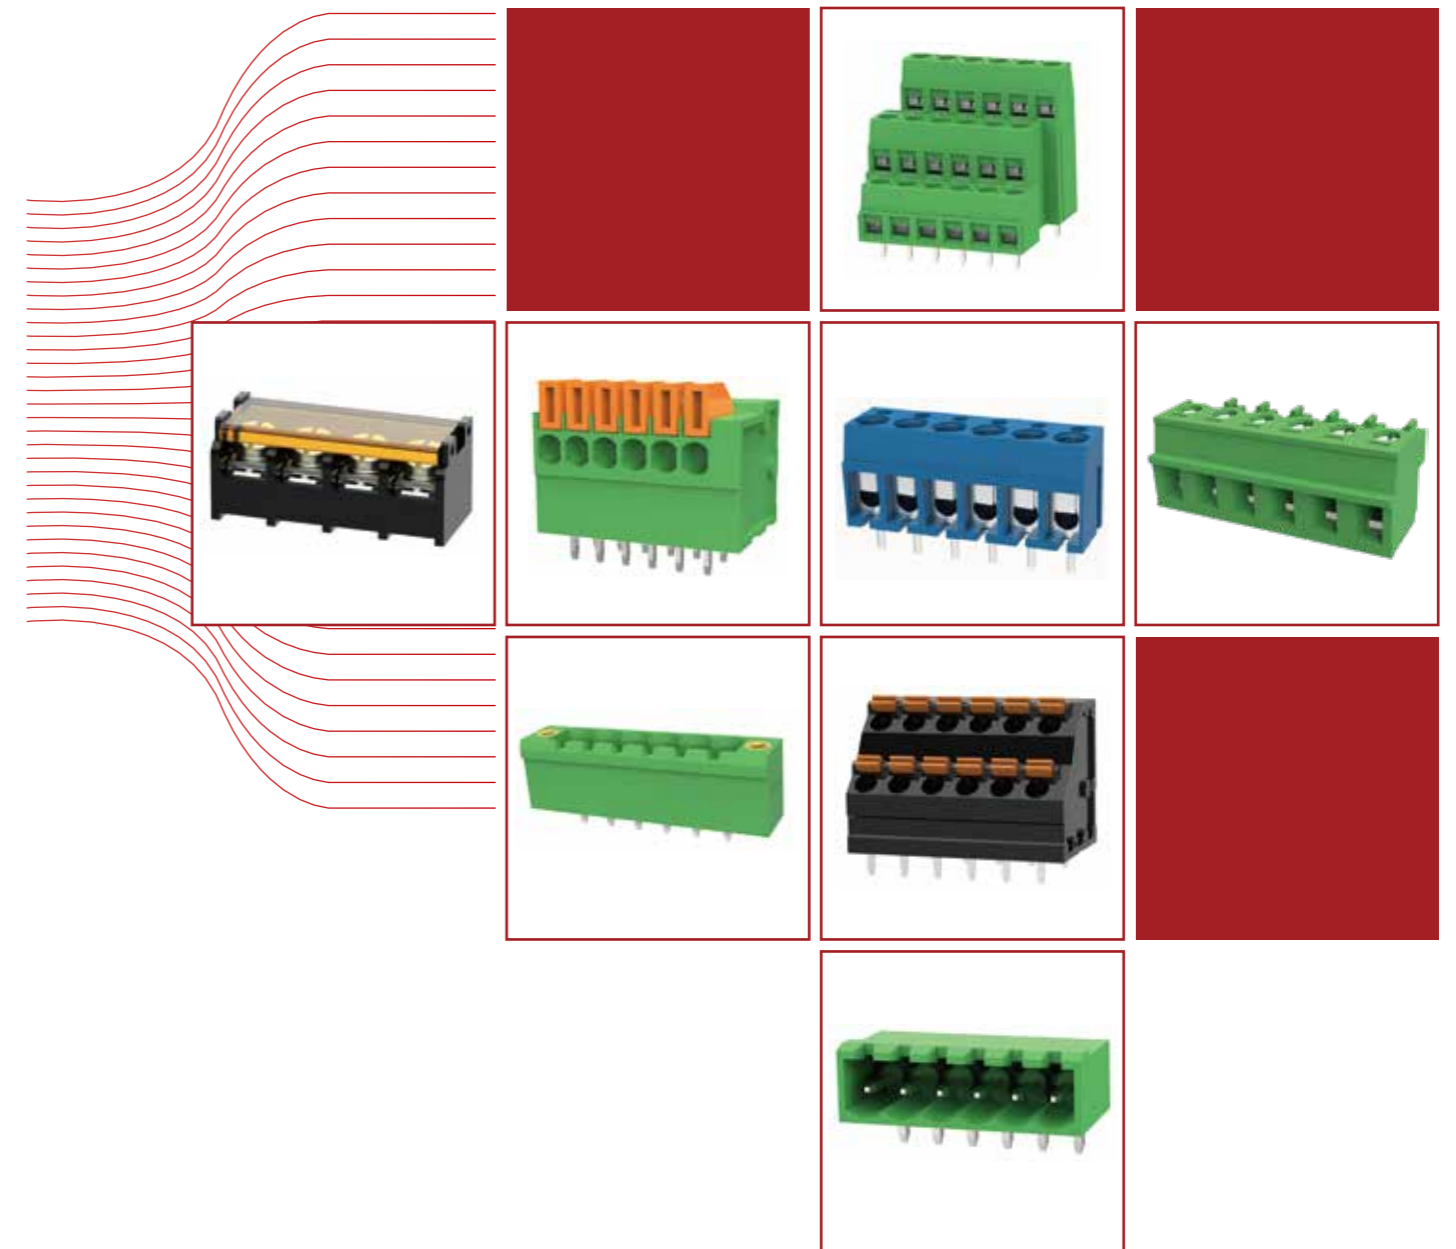

# DORABO

## Ningbo Dorabo Electric Co., Ltd

### China Headquarters

Information inquiry, consulting services, FAQs

+86-400-860-0988

info@terminalblock.net

### Technical consultation

Installation and debugging, application and configuration, troubleshooting

+86-18106644275

tech@terminalblock.net

### International Business Consulting

Information inquiry, consulting services, FAQs

+86-13116659155 +86-13185980275

steven.lu@terminalblock.net info@terminalblock.net

### Domestic business consulting

Product selection and solution consulting

+86-18058513799 +86-18106644275 +86-18966387535

sale@terminalblock.net



Scan WeChat



Scan WeChat



Scan WeChat

Ningbo Dorabo Electric Co., Ltd

+86-400-860-0988

## Company Introduction

Ningbo Dorabo Electric Co., Ltd. is a globally renowned provider of integrated solutions for industrial connectors. A globally renowned top manufacturer of wiring terminals and industrial electrical connections, with best-selling products in China, the United States, and Germany. More than 100 countries and regions including China, the United Kingdom, Italy, Spain, Japan, Singapore, and others, providing global industrial automation, chemical, instrumentation, power and electrical, rail transit, ships, new energy, elevators, lighting, security, aerospace, etc. The industry provides high-quality services, and all types of products have passed multiple safety regulations certifications such as CQC, UL, VDE, CE, etc. ISO9001, ISO14001 and other quality management system certifications.



## Certification Display



## Industrial automation solutions

The application of connectors in industrial robots may encounter safety protection issues, DORABO Dibo Electric's connectors perfectly solve such problems.



## Rail Transit Solutions

The application of spring pressure connection technology makes short and long-distance transportation maintenance free. Connection becomes possible, DORABO Dibo Electric can provide more comprehensive Solution.



## Wind power generation solutions

Focusing on technological upgrading in the new energy industry, relying on next-generation intelligent connectivity Technology, providing a full process new energy connection from power generation, energy storage, to charging. Connect to application technology solutions.



## Intelligent Building Solutions

DORABO Dibo Electric is your high-quality partner throughout the entire process. Provide streetlight control interface, power and data connectors, relays, power and Customized interconnection solutions such as line filters help you create sustainable solutions. Continued, the future of efficiency and interconnectivity.




## 目录 Directory

	弹片式端子台 ..... 06 Shrapnel terminal block
	插拔式端子台 ..... 12 Plug-In terminal block
	升降式端子台 ..... 65 Lifting terminal block
	栅栏式端子台 ..... 86 Barrier terminal block
	弹簧式端子台 ..... 106 Spring-type terminal block
	贯通式端子台 ..... 120 Feed-through terminal block
	轨道式端子台 ..... 122 Rail terminal block
	布线式端子台 ..... 123 Wiring terminal block

Shrapnel terminal block


## 弹片式端子台

The spring type terminal block utilizes the principle of lifting and lowering the clamp body in the most economical way, and takes into account the two major characteristics of compact structure and firm connection in design. Mainly based on 2P and 3P The cardinality can be independently concatenated and combined into any desired number of digits according to needs. The product can connect all types of wires with a cross-section of 0.08mm<sup>2</sup> to 16mm<sup>2</sup>,The spacing can be selected from 2.54mm to 15.0mm, and there are three entry methods: 90°, 135°, and 180°. The product design complies with international standards such as IEC60998 and UL1059 accurate Has obtained UL certification in the United States.

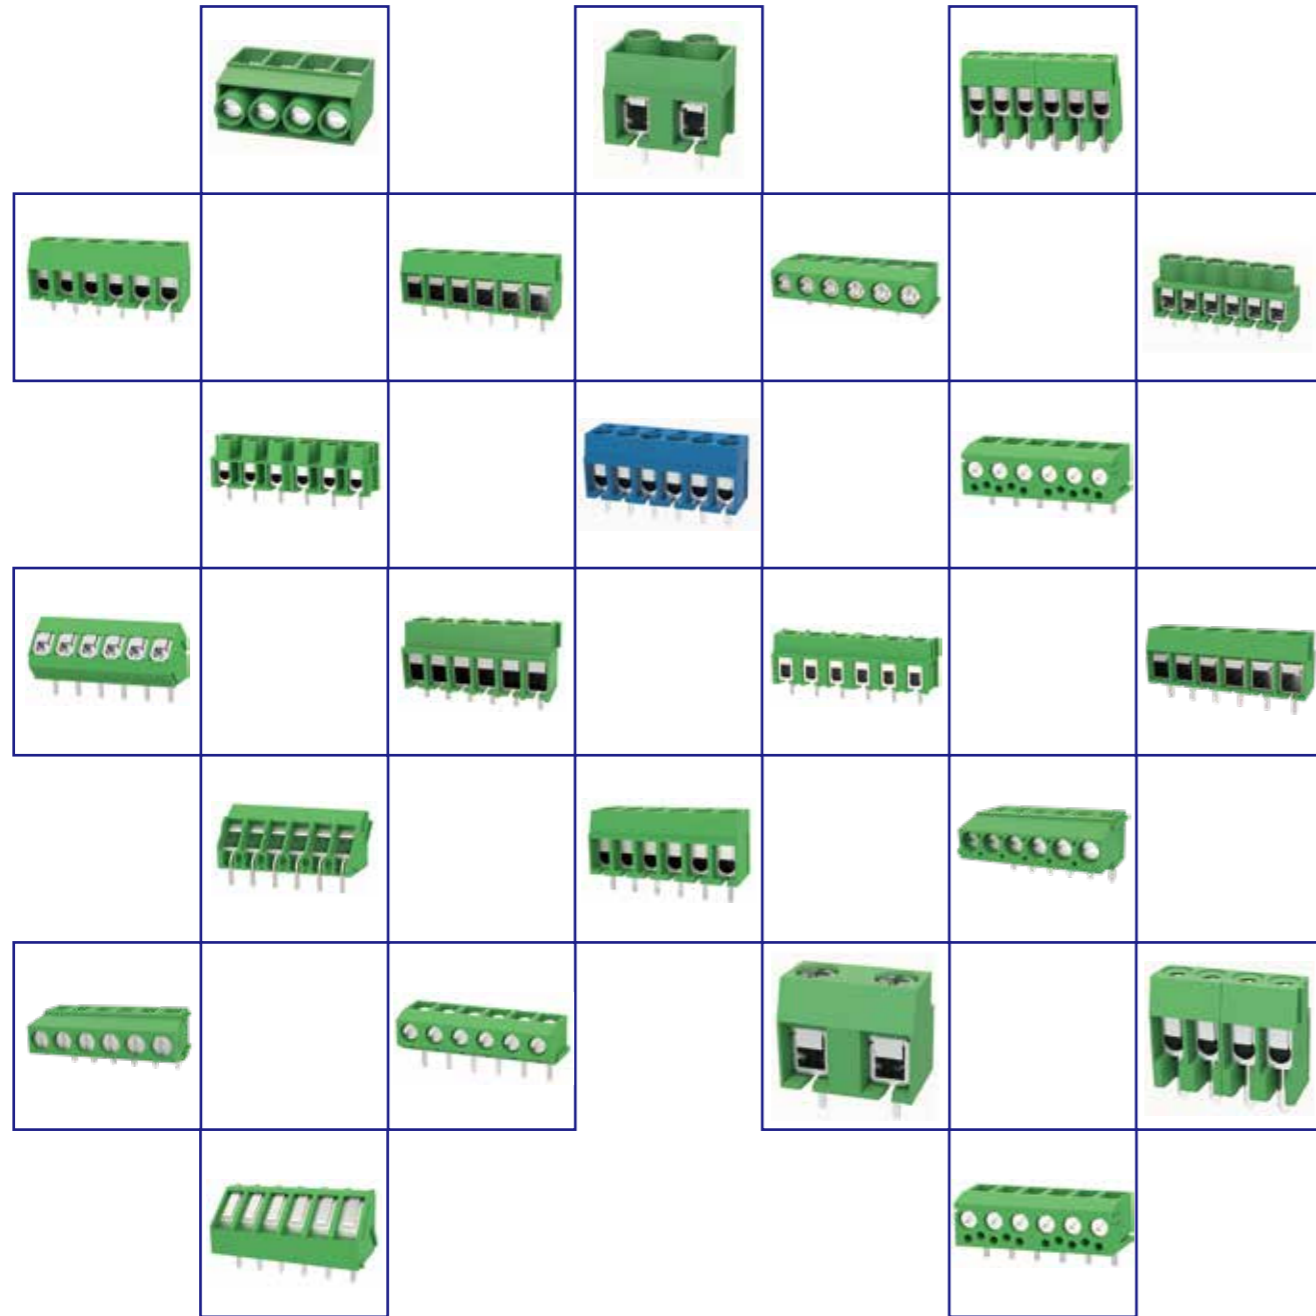


## 弹片式端子台 Shrapnel terminal block

UL/CUL 技术参数 UL/CUL Technical Data		C UL US		
等级 Use Group	B	C	D	
额定电压 Rated Voltage [V]	300	-	-	
额定电流 Rated Current [A]	15	-	-	
接线范围 Wire Range	26-12			
单/多芯线 Solid/Stranded [AWG]	26-12			
间距 Pitch [mm]	5.0			
螺丝 Screw/扭矩 Torque(Max) [N.m]	M2.6/0.4			

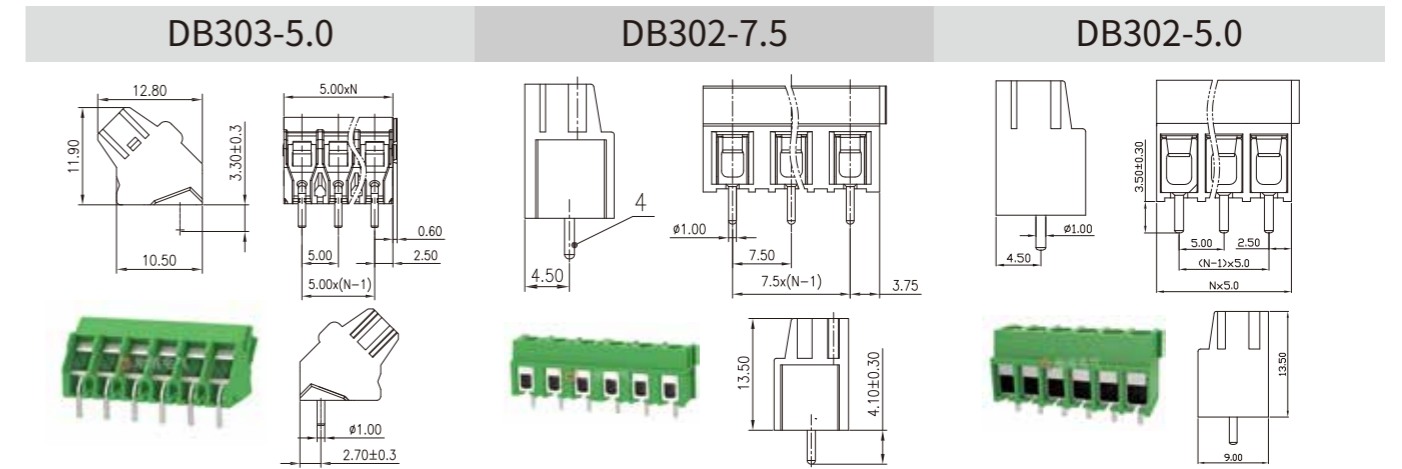

UL/CUL 技术参数 UL/CUL Technical Data		C UL US		
等级 Use Group	B	C	D	
额定电压 Rated Voltage [V]	300	-	300	
额定电流 Rated Current [A]	10	-	10	
接线范围 Wire Range	26-16			
单/多芯线 Solid/Stranded [AWG]	26-16			
间距 Pitch [mm]	3.5			
螺丝 Screw/扭矩 Torque(Max) [N.m]	M2.0/0.2			



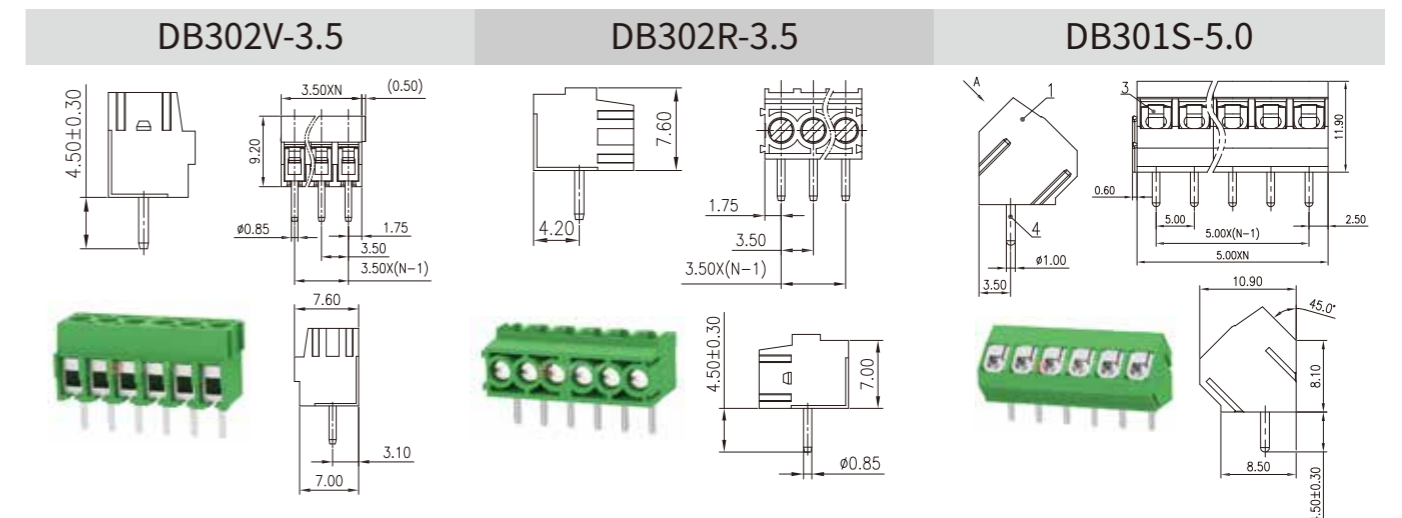


# 弹片式端子台 Shrapnel terminal block

UL/CUL 技术参数 UL/CUL Technical Data		CUL US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		250	-	250
额定电流 Rated Current [A]		16	-	10
接线范围 Wire Range		22-14		
单/多芯线 Solid/Stranded [AWG]				
间距 Pitch [mm]		5.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M2.5/0.4		

UL/CUL 技术参数 UL/CUL Technical Data		CUL US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	-
额定电流 Rated Current [A]		7	-	-
接线范围 Wire Range		24-18		
单/多芯线 Solid/Stranded [AWG]				
间距 Pitch [mm]		3.96		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M2/0.2		




UL/CUL 技术参数 UL/CUL Technical Data		CUL US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	-
额定电流 Rated Current [A]		7	-	-
接线范围 Wire Range		24-18		
单/多芯线 Solid/Stranded [AWG]				
间距 Pitch [mm]		3.81		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M2/0.2		

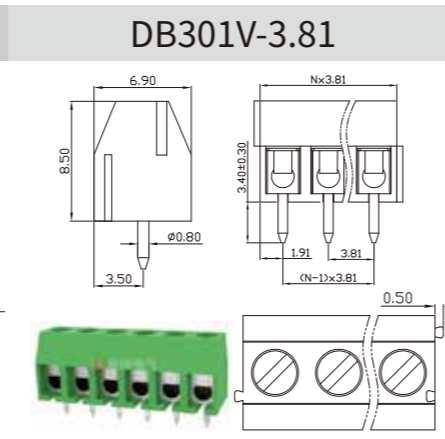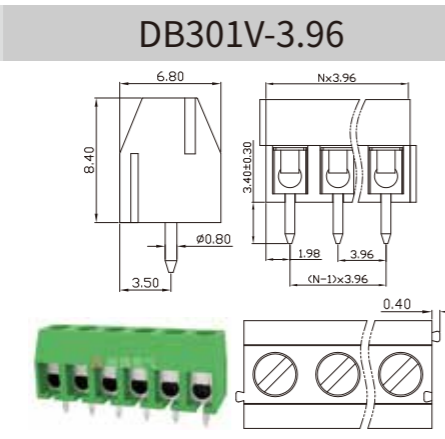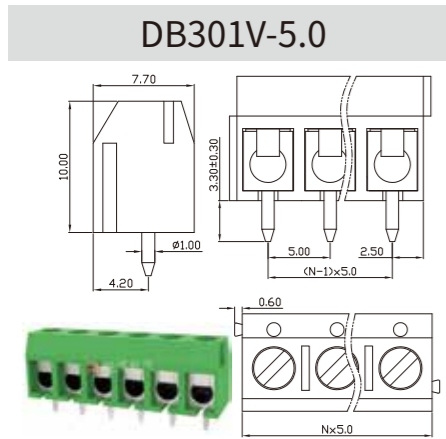

UL/CUL 技术参数 UL/CUL Technical Data		CUL US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	-
额定电流 Rated Current [A]		7	-	-
接线范围 Wire Range		24-18		
单/多芯线 Solid/Stranded [AWG]				
间距 Pitch [mm]		3.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M2/0.2		

UL/CUL 技术参数 UL/CUL Technical Data		CUL US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		250	-	250
额定电流 Rated Current [A]		16	-	10
接线范围 Wire Range		22-14		
单/多芯线 Solid/Stranded [AWG]				
间距 Pitch [mm]		5.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M2.5/0.4		

UL/CUL 技术参数 UL/CUL Technical Data		CUL US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	-
额定电流 Rated Current [A]		7	-	-
接线范围 Wire Range		24-18		
单/多芯线 Solid/Stranded [AWG]				
间距 Pitch [mm]		3.96		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M2.0/0.2		

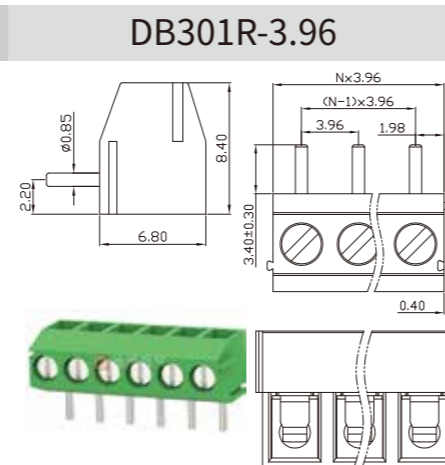
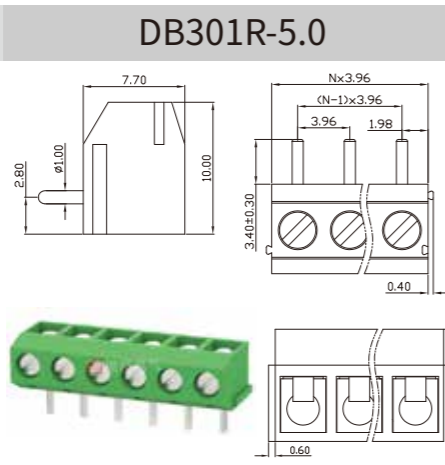
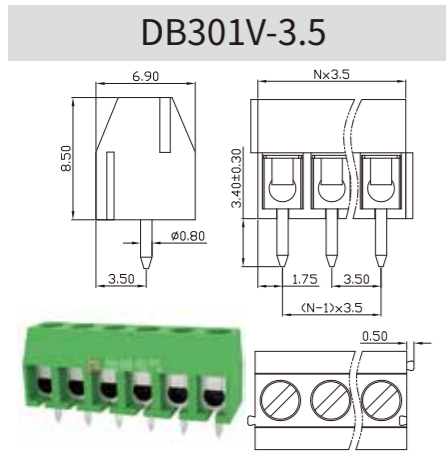


# 弹片式端子台 Shrapnel terminal block

UL/CUL 技术参数 UL/CUL Technical Data		CUL US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		7	-	10
接线范围 Wire Range		24-18		
单/多芯线 Solid/Stranded [AWG]				
间距 Pitch [mm]		3.81		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M2.0/0.2		

UL/CUL 技术参数 UL/CUL Technical Data		CUL US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		7	-	10
接线范围 Wire Range		24-18		
单/多芯线 Solid/Stranded [AWG]				
间距 Pitch [mm]		3.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M2.0/0.2		




UL/CUL 技术参数 UL/CUL Technical Data		CUL US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		15	-	10
接线范围 Wire Range		22-14		
单/多芯线 Solid/Stranded [AWG]				
间距 Pitch [mm]		7.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M3.0/0.5		

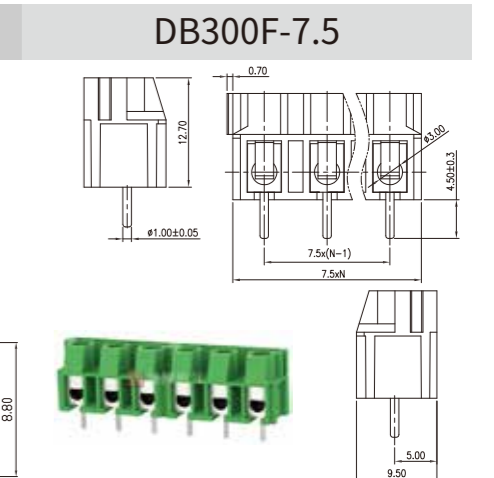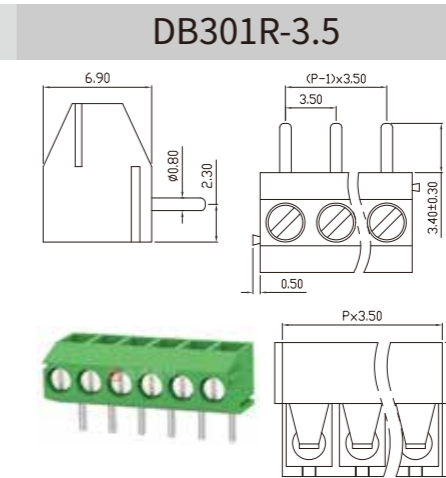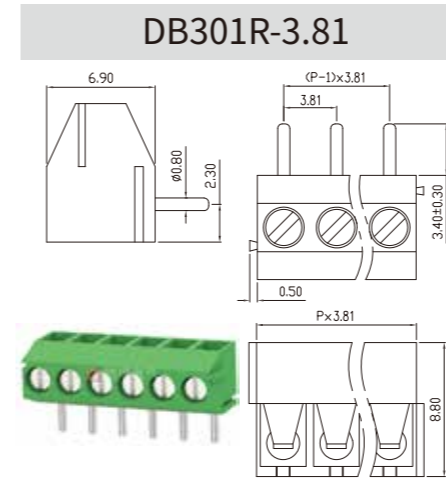

UL/CUL 技术参数 UL/CUL Technical Data		CUL US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		130	-	130
额定电流 Rated Current [A]		16	-	10
接线范围 Wire Range		22-14		
单/多芯线 Solid/Stranded [AWG]				
间距 Pitch [mm]		7.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M3.0/0.5		

UL/CUL 技术参数 UL/CUL Technical Data		CUL US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	-
额定电流 Rated Current [A]		10	-	-
接线范围 Wire Range		24-14		
单/多芯线 Solid/Stranded [AWG]				
间距 Pitch [mm]		5.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M3/0.5		

UL/CUL 技术参数 UL/CUL Technical Data		CUL US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		250	-	250
额定电流 Rated Current [A]		16	-	16
接线范围 Wire Range		22-14		
单/多芯线 Solid/Stranded [AWG]				
间距 Pitch [mm]		5.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M3/0.5		

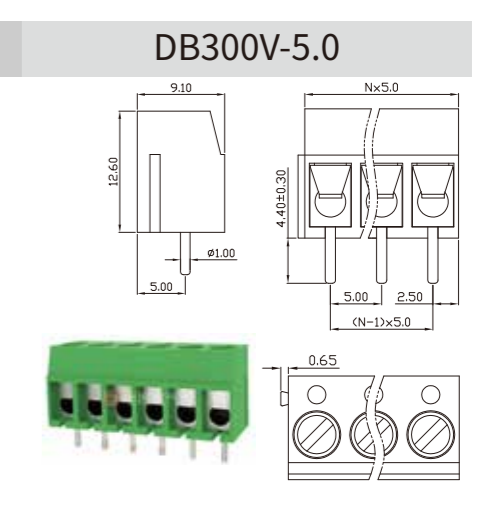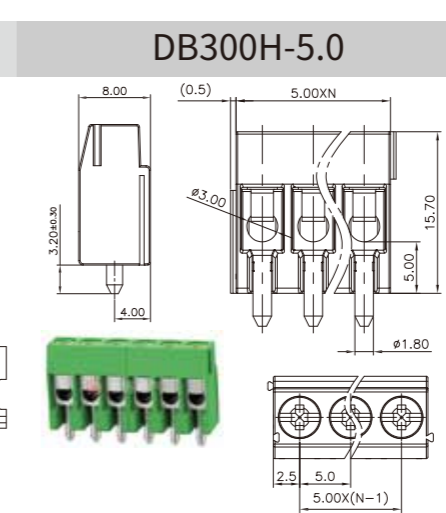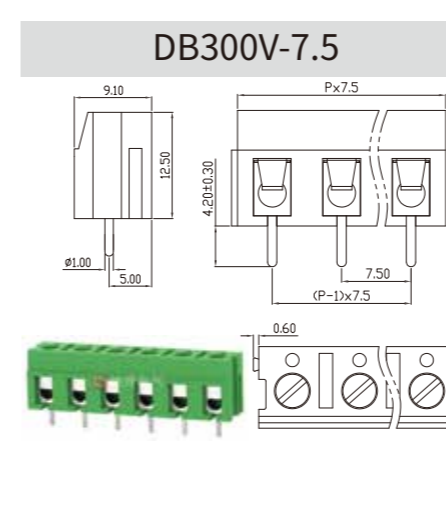


# 弹片式端子台 Shrapnel terminal block

UL/CUL 技术参数 UL/CUL Technical Data			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	-
额定电流 Rated Current [A]	7	-	-
接线范围 Wire Range	24-18		
单/多芯线 Solid/Stranded [AWG]	24-18		
间距 Pitch [mm]	3.81		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M2.0/0.2		


UL/CUL 技术参数 UL/CUL Technical Data			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	16	-	10
接线范围 Wire Range	22-14		
单/多芯线 Solid/Stranded [AWG]	22-14		
间距 Pitch [mm]	5.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.5		

UL/CUL 技术参数 UL/CUL Technical Data			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	130	-	-
额定电流 Rated Current [A]	7	-	-
接线范围 Wire Range	24-18		
单/多芯线 Solid/Stranded [AWG]	24-18		
间距 Pitch [mm]	3.81		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M2.0/0.2		


DB300V-3.81

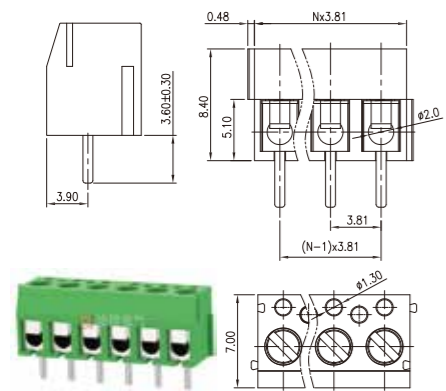


DB300R-5.0

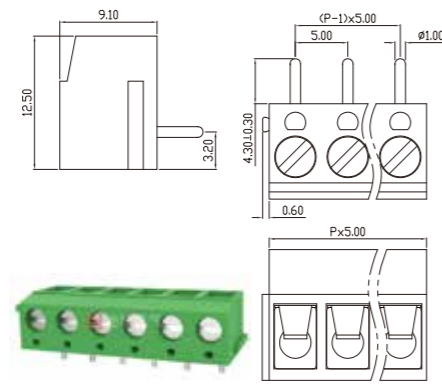


DB300R-3.81

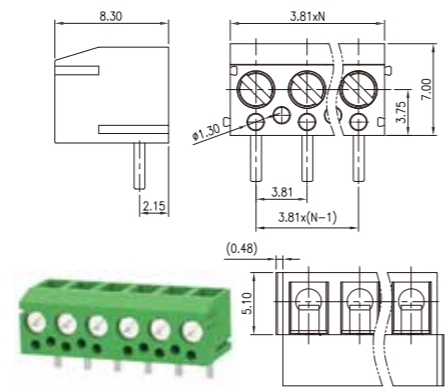


DB166-7.5

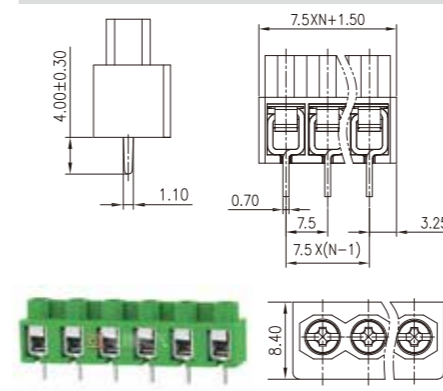

DB166-5.0

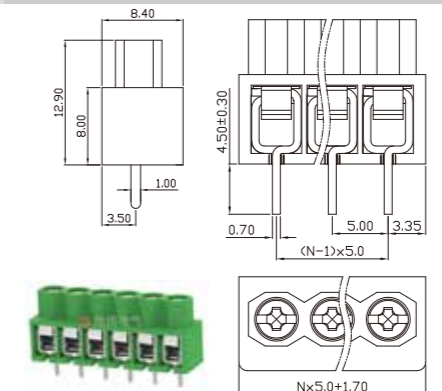

DB126-7.5-3P

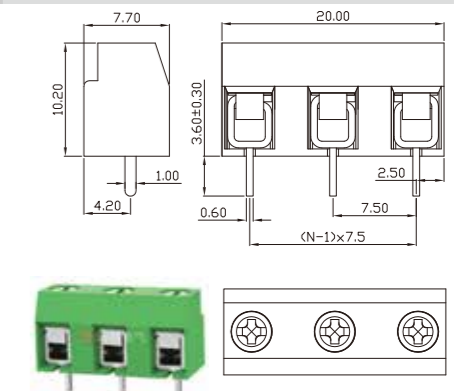

UL/CUL 技术参数 UL/CUL Technical Data			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	15	-	10
接线范围 Wire Range	22-12		
单/多芯线 Solid/Stranded [AWG]	22-12		
间距 Pitch [mm]	7.62		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M2.5/0.4		

UL/CUL 技术参数 UL/CUL Technical Data			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	15	-	10
接线范围 Wire Range	22-12		
单/多芯线 Solid/Stranded [AWG]	22-12		
间距 Pitch [mm]	5.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M2.5/0.35		


UL/CUL 技术参数 UL/CUL Technical Data			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	15	-	10
接线范围 Wire Range	22-12		
单/多芯线 Solid/Stranded [AWG]	22-12		
间距 Pitch [mm]	5.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M2.5/0.4		

UL/CUL 技术参数 UL/CUL Technical Data			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	8	-	8
接线范围 Wire Range	26-14		
单/多芯线 Solid/Stranded [AWG]	26-14		
间距 Pitch [mm]	7.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M2.5/0.25		


UL/CUL 技术参数 UL/CUL Technical Data			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	8	-	8
接线范围 Wire Range	26-14		
单/多芯线 Solid/Stranded [AWG]	26-14		
间距 Pitch [mm]	5.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M2.5/0.25		

UL/CUL 技术参数 UL/CUL Technical Data			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	8	-	8
接线范围 Wire Range	26-14		
单/多芯线 Solid/Stranded [AWG]	26-14		
间距 Pitch [mm]	5.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M2.5/0.25		


DB167-7.62

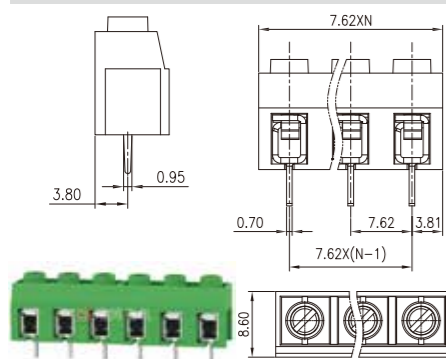


DB167V-5.0

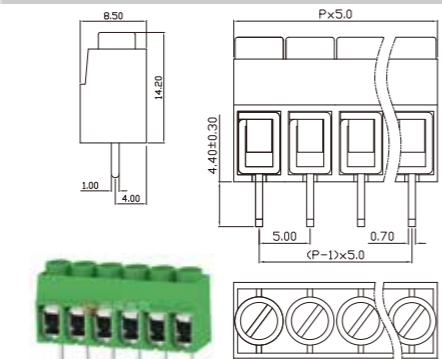


DB167R-5.0

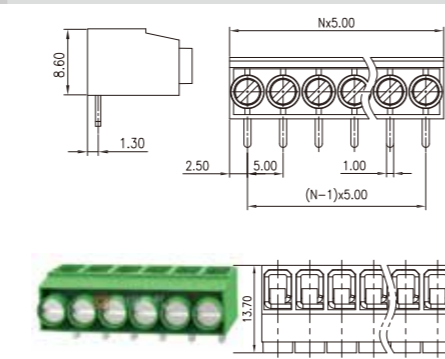


DB126-7.5-2P

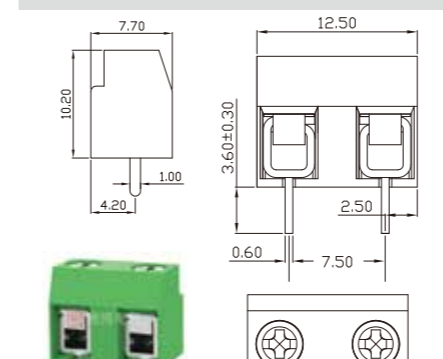

DB126V-5.0

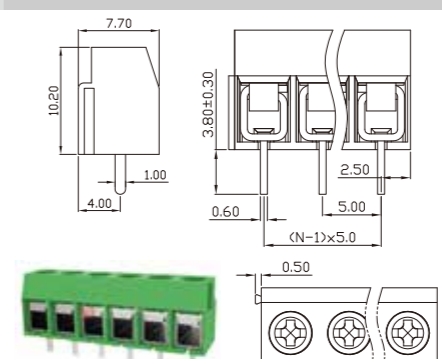


DB126R-5.0

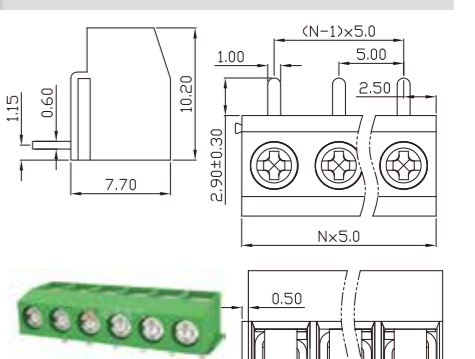


Plug-In terminal block  
插拔式端子台

Pluggable terminal block are used to connect wires and printed circuit boards, allowing for easy and safe transmission of signals, data, and power. Needle pitch from 2.5 mm to 15 mm, current The strength can reach 125 A, and our XS to XL COMBICON range always provides the correct solution for your equipment or control cabinet design. Supports multiple The connection method and installation method are highly flexible and suitable for all applications. The product design complies with international standards such as IEC60998 and UL1059. ObtainedUL certified in the United States.

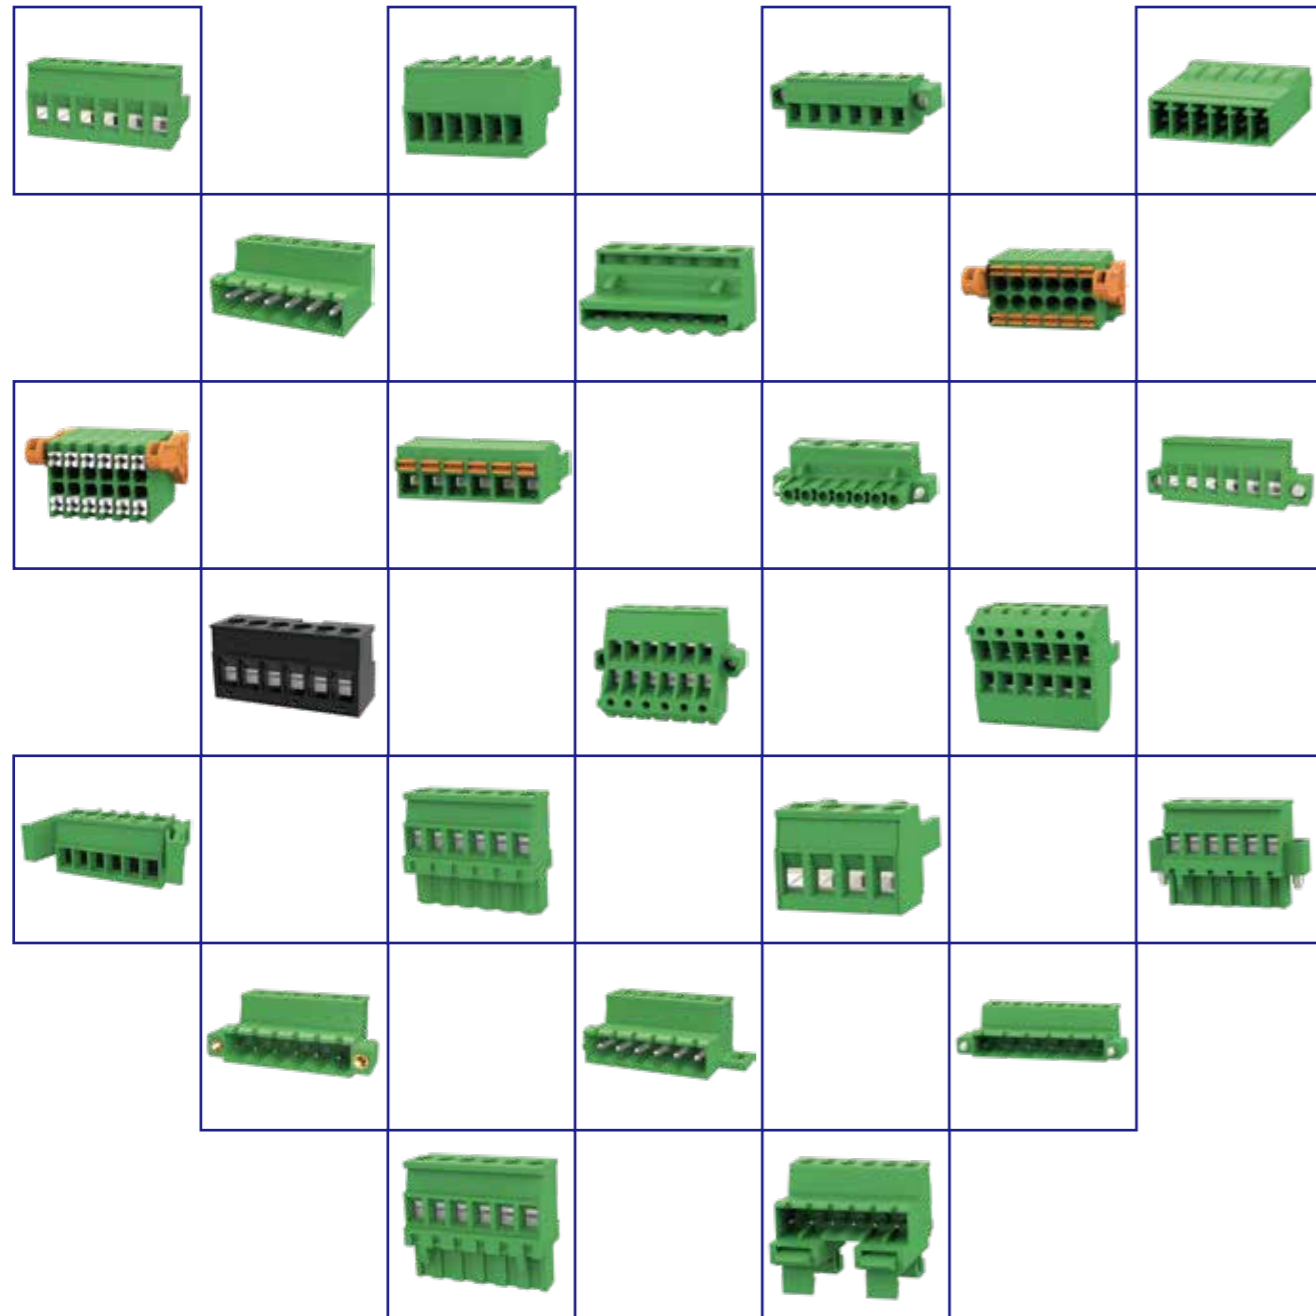


插拔式端子台 Plug-In terminal block

UL/CUL 技术参数 UL/CUL Technical Data				UL/CUL 技术参数 UL/CUL Technical Data				UL/CUL 技术参数 UL/CUL Technical Data			
等级 Use Group	B	C	D	等级 Use Group	B	C	D	等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	-	额定电压 Rated Voltage [V]	300	-	300	额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	10	-	-	额定电流 Rated Current [A]	10	-	10	额定电流 Rated Current [A]	8	-	8
接线范围 Wire Range				接线范围 Wire Range				接线范围 Wire Range			
单/多芯线 Solid/Stranded [AWG]				单/多芯线 Solid/Stranded [AWG]				单/多芯线 Solid/Stranded [AWG]			
间距 Pitch [mm]	5.0			间距 Pitch [mm]	5.0			间距 Pitch [mm]	5.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]				螺丝 Screw/扭矩 Torque(Max) [N.m]				螺丝 Screw/扭矩 Torque(Max) [N.m]			

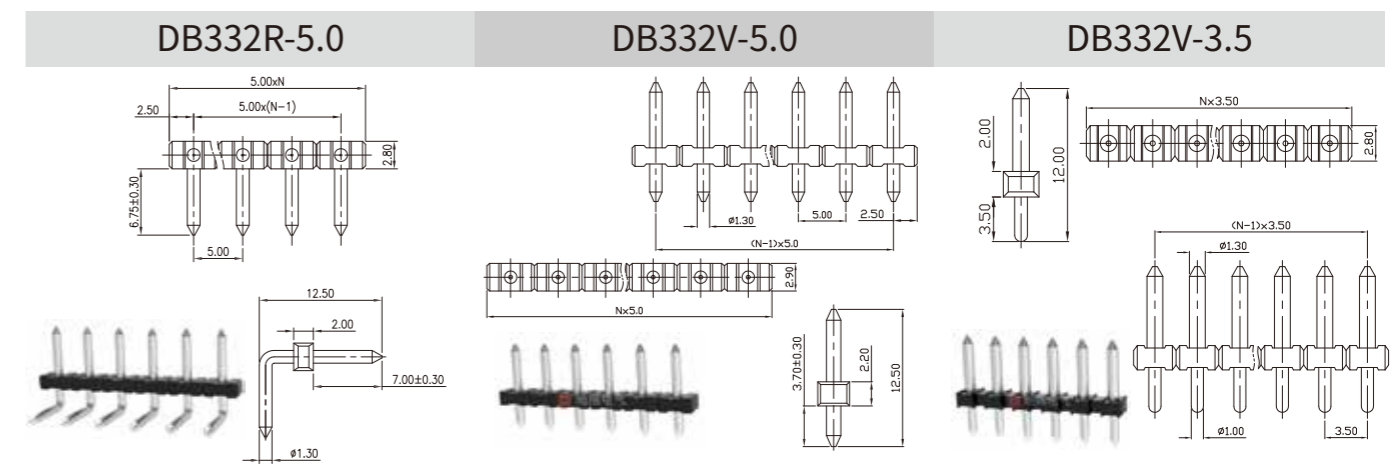

UL/CUL 技术参数 UL/CUL Technical Data				UL/CUL 技术参数 UL/CUL Technical Data				UL/CUL 技术参数 UL/CUL Technical Data			
等级 Use Group	B	C	D	等级 Use Group	B	C	D	等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300	额定电压 Rated Voltage [V]	300	-	250	额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	10	-	10	额定电流 Rated Current [A]	12	-	14	额定电流 Rated Current [A]	15	-	10
接线范围 Wire Range	22-14			接线范围 Wire Range	22-14			接线范围 Wire Range	22-14		
单/多芯线 Solid/Stranded [AWG]				单/多芯线 Solid/Stranded [AWG]				单/多芯线 Solid/Stranded [AWG]			
间距 Pitch [mm]	5.0			间距 Pitch [mm]	5.0			间距 Pitch [mm]	5.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M2.5/0.4			螺丝 Screw/扭矩 Torque(Max) [N.m]	M2.5/0.4			螺丝 Screw/扭矩 Torque(Max) [N.m]	M2.5/0.4		

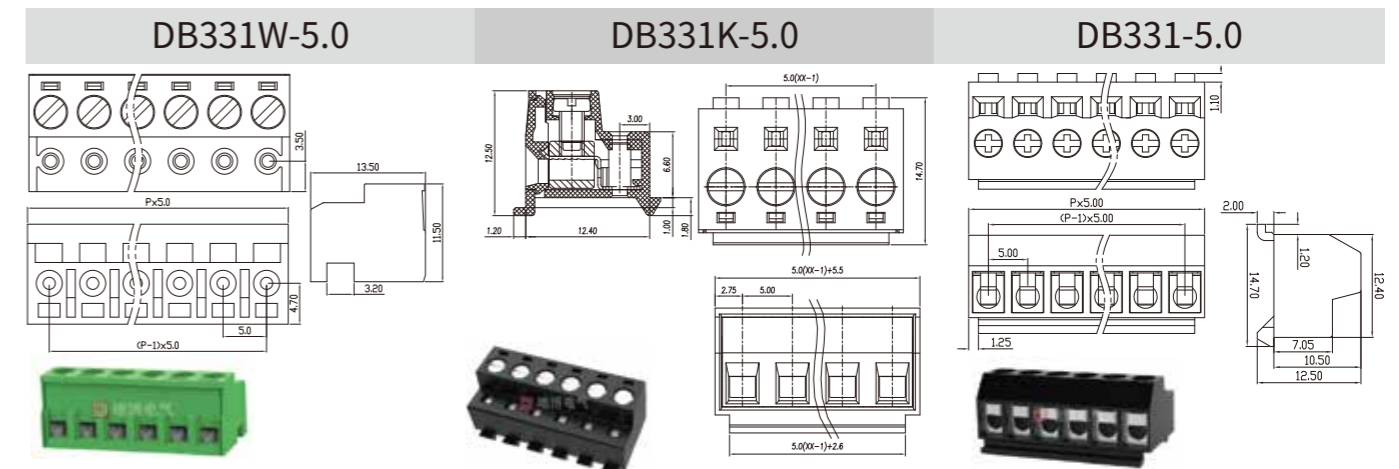


# 插拔式端子台 Plug-In terminal block

UL/CUL 技术参数 UL/CUL Technical Data		C <sub>RU</sub> US		
等级 Use Group	B C D	B	C	D
额定电压 Rated Voltage [V]	300 - 300	300	-	300
额定电流 Rated Current [A]	8 - 10	8	-	10
接线范围 Wire Range	28-16	28-16		
单/多芯线 Solid/Stranded [AWG]				
间距 Pitch [mm]	3.5	3.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M2.5/0.2	M2.5/0.2		


UL/CUL 技术参数 UL/CUL Technical Data		C <sub>RU</sub> US		
等级 Use Group	B C D	B	C	D
额定电压 Rated Voltage [V]	300 - 250	300	-	250
额定电流 Rated Current [A]	10 - 10	10	-	10
接线范围 Wire Range	28-16	28-16		
单/多芯线 Solid/Stranded [AWG]				
间距 Pitch [mm]	5.0	5.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M2.5/0.4	M2.5/0.4		

UL/CUL 技术参数 UL/CUL Technical Data		C <sub>RU</sub> US		
等级 Use Group	B C D	B	C	D
额定电压 Rated Voltage [V]	300 - 300	300	-	300
额定电流 Rated Current [A]	10 - 10	10	-	10
接线范围 Wire Range	26-16	26-16		
单/多芯线 Solid/Stranded [AWG]				
间距 Pitch [mm]	3.5	3.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	0.2	0.2		


DB332-3.5

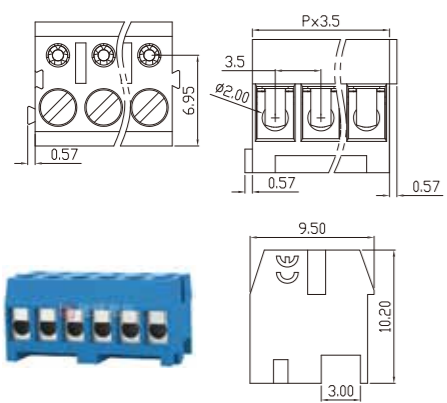

DB332-5.0

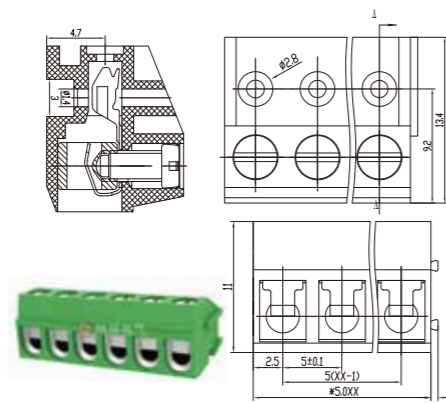

DB335-3.5

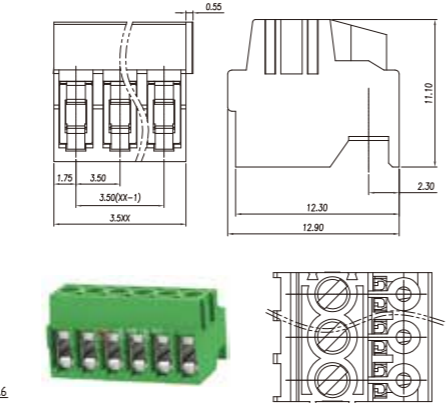


# 插拔式端子台 Plug-In terminal block

UL/CUL 技术参数 UL/CUL Technical Data		C <sub>RU</sub> US		
等级 Use Group	B C D	B	C	D
额定电压 Rated Voltage [V]	600 600 300	600	600	300
额定电流 Rated Current [A]	65 65 5	65	65	5
接线范围 Wire Range	-	-		
单/多芯线 Solid/Stranded [AWG]				
间距 Pitch [mm]	10.16	10.16		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-	-		


UL/CUL 技术参数 UL/CUL Technical Data		C <sub>RU</sub> US		
等级 Use Group	B C D	B	C	D
额定电压 Rated Voltage [V]	600 600 300	600	600	300
额定电流 Rated Current [A]	65 65 5	65	65	5
接线范围 Wire Range	-	-		
单/多芯线 Solid/Stranded [AWG]				
间距 Pitch [mm]	10.16	10.16		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-	-		

UL/CUL 技术参数 UL/CUL Technical Data		C <sub>RU</sub> US		
等级 Use Group	B C D	B	C	D
额定电压 Rated Voltage [V]	600 600 300	600	600	300
额定电流 Rated Current [A]	65 65 5	65	65	5
接线范围 Wire Range	-	-		
单/多芯线 Solid/Stranded [AWG]				
间距 Pitch [mm]	10.16	10.16		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-	-		


DB3ERC-10.16

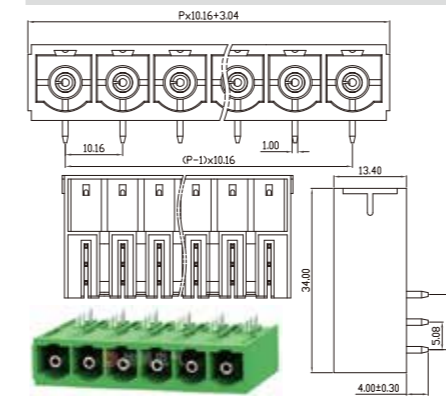

DB3ERC-10.16

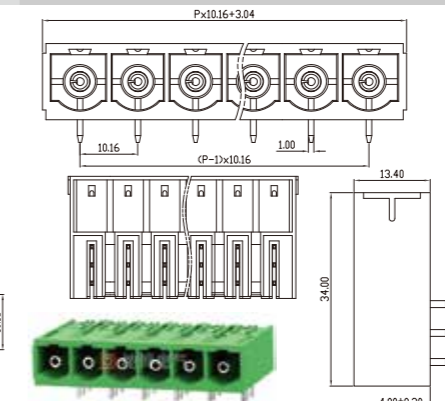

DB3ERM-10.16

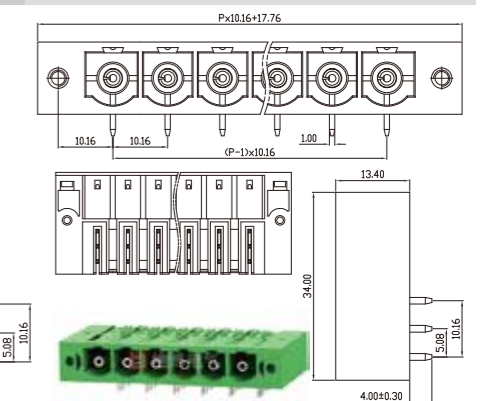

UL/CUL 技术参数 UL/CUL Technical Data		C <sub>RU</sub> US		
等级 Use Group	B C D	B	C	D
额定电压 Rated Voltage [V]	300 - 300	300	-	300
额定电流 Rated Current [A]	15 - 10	15	-	10
接线范围 Wire Range	-	-		
单/多芯线 Solid/Stranded [AWG]				
间距 Pitch [mm]	5.0	5.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-	-		

UL/CUL 技术参数 UL/CUL Technical Data		C <sub>RU</sub> US		
等级 Use Group	B C D	B	C	D
额定电压 Rated Voltage [V]	300 - 300	300	-	300
额定电流 Rated Current [A]	15 - 15	15	-	15
接线范围 Wire Range	-	-		
单/多芯线 Solid/Stranded [AWG]				
间距 Pitch [mm]	5.0	5.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-	-		


UL/CUL 技术参数 UL/CUL Technical Data		C <sub>RU</sub> US		
等级 Use Group	B C D	B	C	D
额定电压 Rated Voltage [V]	600 600 300	600	600	300
额定电流 Rated Current [A]	65 65 5	65	65	5
接线范围 Wire Range	-	-		
单/多芯线 Solid/Stranded [AWG]				
间距 Pitch [mm]	10.16	10.16		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-	-		

UL/CUL 技术参数 UL/CUL Technical Data		C <sub>RU</sub> US		
等级 Use Group	B C D	B	C	D
额定电压 Rated Voltage [V]	600 600 300	600	600	300
额定电流 Rated Current [A]	65 65 5	65	65	5
接线范围 Wire Range	-	-		
单/多芯线 Solid/Stranded [AWG]				
间距 Pitch [mm]	10.16	10.16		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-	-		


UL/CUL 技术参数 UL/CUL Technical Data		C <sub>RU</sub> US		
等级 Use Group	B C D	B	C	D
额定电压 Rated Voltage [V]	600 600 300	600	600	300
额定电流 Rated Current [A]	65 65 5	65	65	5
接线范围 Wire Range	-	-		
单/多芯线 Solid/Stranded [AWG]				
间距 Pitch [mm]	10.16	10.16		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-	-		

UL/CUL 技术参数 UL/CUL Technical Data		C <sub>RU</sub> US		
等级 Use Group	B C D	B	C	D
额定电压 Rated Voltage [V]	300 300 -	300	300	-
额定电流 Rated Current [A]	30 30 -	30	30	-
接线范围 Wire Range	-	-		
单/多芯线 Solid/Stranded [AWG]				
间距 Pitch [mm]	7.62	7.62		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-	-		


DB2EZF-5.0

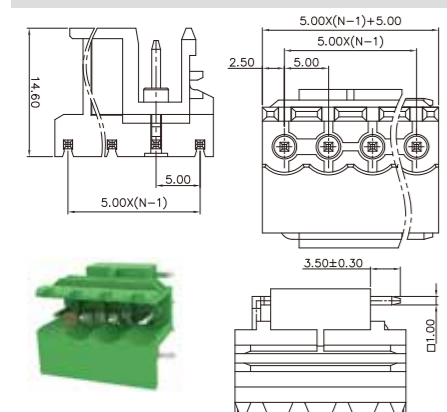


DB2ELF-5.0

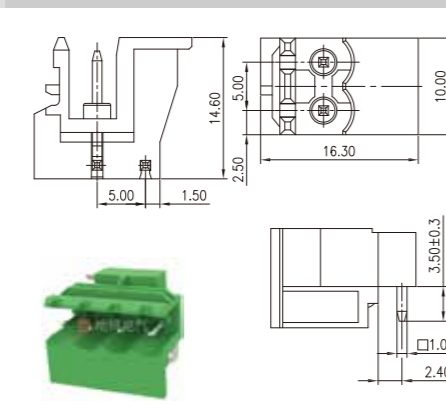


DB3ERMF-10.16

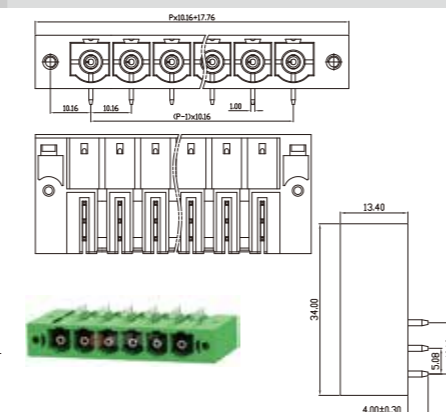


DB3EVM-10.16

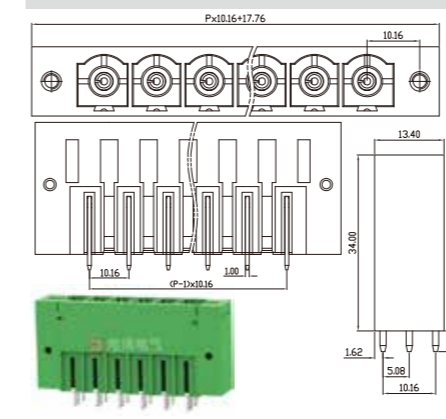

DB3EVC-10.16

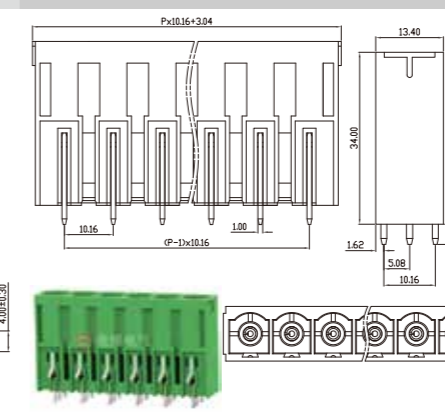

DB3CM-7.62

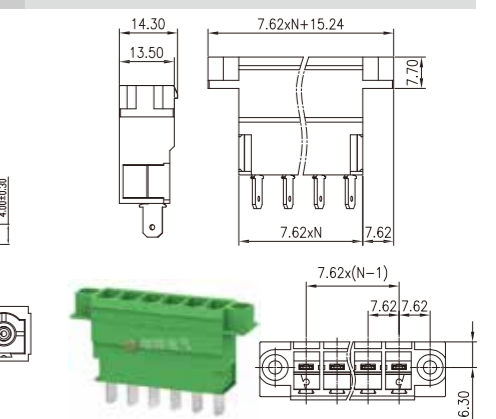



# 插拔式端子台 Plug-In terminal block

UL/CUL 技术参数 UL/CUL Technical Data		cRU US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	300	300
额定电流 Rated Current [A]		42	42	5
接线范围 Wire Range		-		
单/多芯线 Solid/Stranded [AWG]		-		
间距 Pitch [mm]		7.62		
螺丝 Screw/扭矩 Torque(Max) [N.m]		-		




UL/CUL 技术参数 UL/CUL Technical Data		cRU US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	300	300
额定电流 Rated Current [A]		42	42	5
接线范围 Wire Range		-		
单/多芯线 Solid/Stranded [AWG]		-		
间距 Pitch [mm]		7.62		
螺丝 Screw/扭矩 Torque(Max) [N.m]		-		

UL/CUL 技术参数 UL/CUL Technical Data		cRU US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		10	-	10
接线范围 Wire Range		-		
单/多芯线 Solid/Stranded [AWG]		-		
间距 Pitch [mm]		7.62		
螺丝 Screw/扭矩 Torque(Max) [N.m]		-		

DB3ERL-7.62

DB3EVL-7.62

DB3EVM-7.62

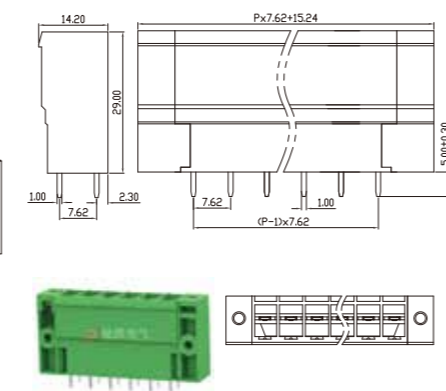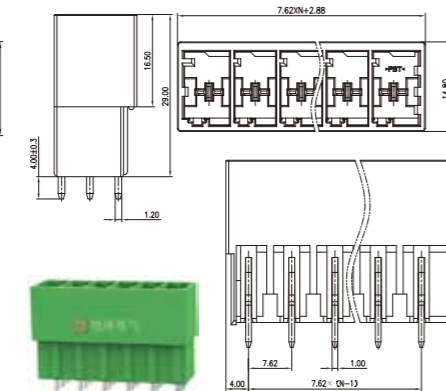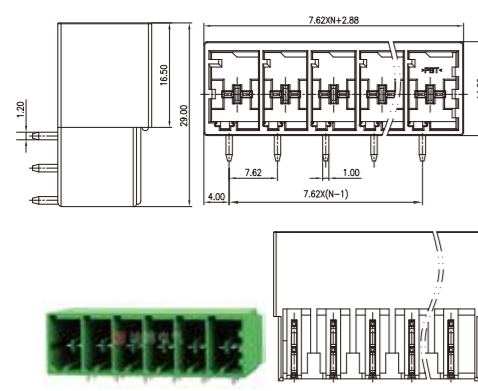

UL/CUL 技术参数 UL/CUL Technical Data		cRU US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		15	-	10
接线范围 Wire Range		-		
单/多芯线 Solid/Stranded [AWG]		-		
间距 Pitch [mm]		7.62		
螺丝 Screw/扭矩 Torque(Max) [N.m]		-		




UL/CUL 技术参数 UL/CUL Technical Data		cRU US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		30	-	10
接线范围 Wire Range		-		
单/多芯线 Solid/Stranded [AWG]		-		
间距 Pitch [mm]		7.62		
螺丝 Screw/扭矩 Torque(Max) [N.m]		-		

UL/CUL 技术参数 UL/CUL Technical Data		cRU US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		30	-	10
接线范围 Wire Range		-		
单/多芯线 Solid/Stranded [AWG]		-		
间距 Pitch [mm]		7.62		
螺丝 Screw/扭矩 Torque(Max) [N.m]		-		

DB3EVC-7.62

DB3ERM-7.62

DB3ERC-7.62

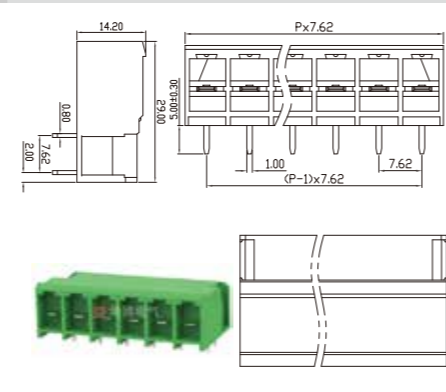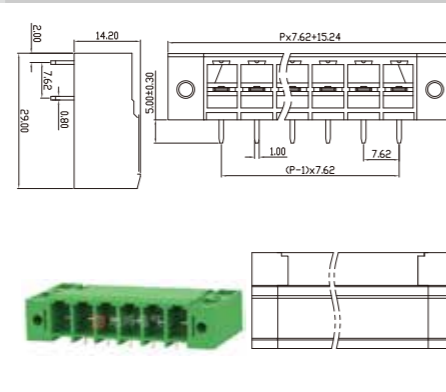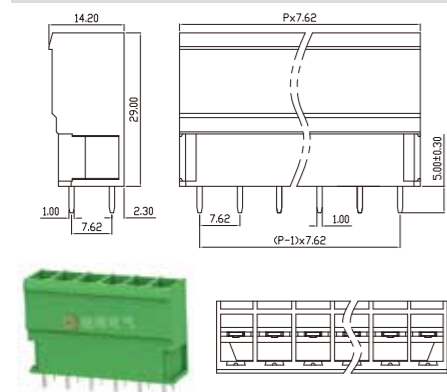

# 插拔式端子台 Plug-In terminal block

UL/CUL 技术参数 UL/CUL Technical Data		cRU US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	300	600
额定电流 Rated Current [A]		41	41	5
接线范围 Wire Range		-		
单/多芯线 Solid/Stranded [AWG]		-		
间距 Pitch [mm]		7.62		
螺丝 Screw/扭矩 Torque(Max) [N.m]		-		




UL/CUL 技术参数 UL/CUL Technical Data		cRU US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	300	600
额定电流 Rated Current [A]		41	41	5
接线范围 Wire Range		-		
单/多芯线 Solid/Stranded [AWG]		-		
间距 Pitch [mm]		7.62		
螺丝 Screw/扭矩 Torque(Max) [N.m]		-		

UL/CUL 技术参数 UL/CUL Technical Data		cRU US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	300	600
额定电流 Rated Current [A]		41	41	5
接线范围 Wire Range		-		
单/多芯线 Solid/Stranded [AWG]		-		
间距 Pitch [mm]		7.62		
螺丝 Screw/扭矩 Torque(Max) [N.m]		-		

DB3ERHMF-7.62

DB3ERHF-7.62

DB3ERHM-7.62

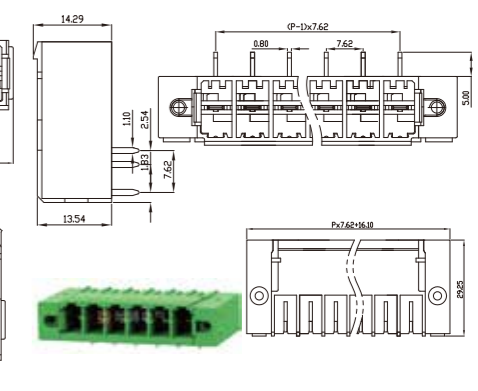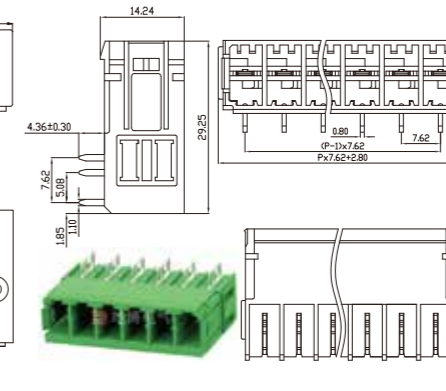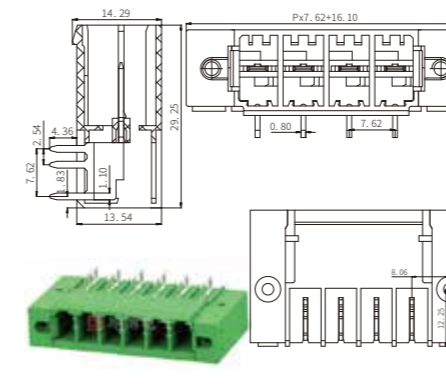

UL/CUL 技术参数 UL/CUL Technical Data		cRU US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	300	600
额定电流 Rated Current [A]		42	42	5
接线范围 Wire Range		-		
单/多芯线 Solid/Stranded [AWG]		-		
间距 Pitch [mm]		7.62		
螺丝 Screw/扭矩 Torque(Max) [N.m]		-		




UL/CUL 技术参数 UL/CUL Technical Data		cRU US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	300	600
额定电流 Rated Current [A]		41	41	5
接线范围 Wire Range		-		
单/多芯线 Solid/Stranded [AWG]		-		
间距 Pitch [mm]		7.62		
螺丝 Screw/扭矩 Torque(Max) [N.m]		-		

UL/CUL 技术参数 UL/CUL Technical Data		cRU US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	300	-
额定电流 Rated Current [A]		30	30	-
接线范围 Wire Range		-		
单/多芯线 Solid/Stranded [AWG]		-		
间距 Pitch [mm]		7.62		
螺丝 Screw/扭矩 Torque(Max) [N.m]		-		

DB3ERH-7.62


DB3EVHM-7.62

DB3EVH-7.62

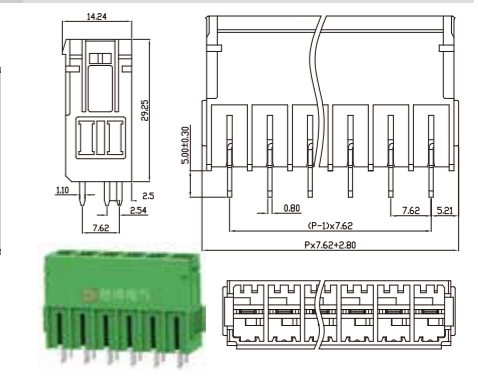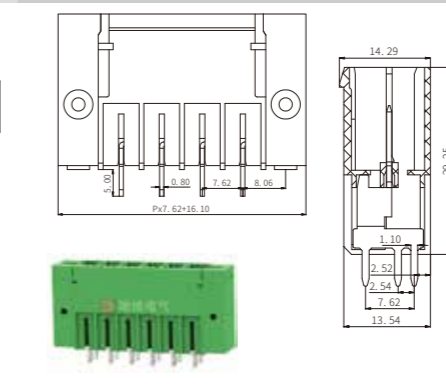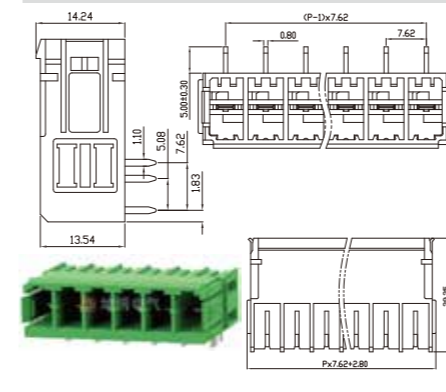


# 插拔式端子台 Plug-In terminal block

UL/CUL 技术参数 UL/CUL Technical Data		cRU US		
等级 Use Group	B C D	B	C	D
额定电压 Rated Voltage [V]	300 - 300	300	-	300
额定电流 Rated Current [A]	15 - 10	15	-	10
接线范围 Wire Range				
单/多芯线 Solid/Stranded [AWG]	-	-	-	-
间距 Pitch [mm]	5.08	5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-	-		

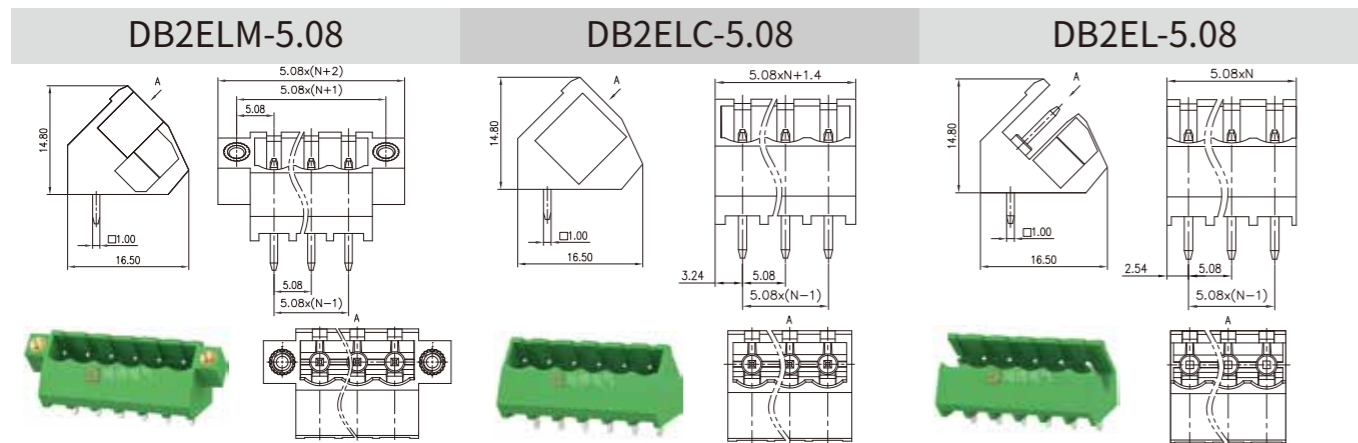


UL/CUL 技术参数 UL/CUL Technical Data		cRU US		
等级 Use Group	B C D	B	C	D
额定电压 Rated Voltage [V]	300 - 300	300	-	300
额定电流 Rated Current [A]	8 - 10	8	-	10
接线范围 Wire Range				
单/多芯线 Solid/Stranded [AWG]	-	-	-	-
间距 Pitch [mm]	3.81	3.81		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-	-		

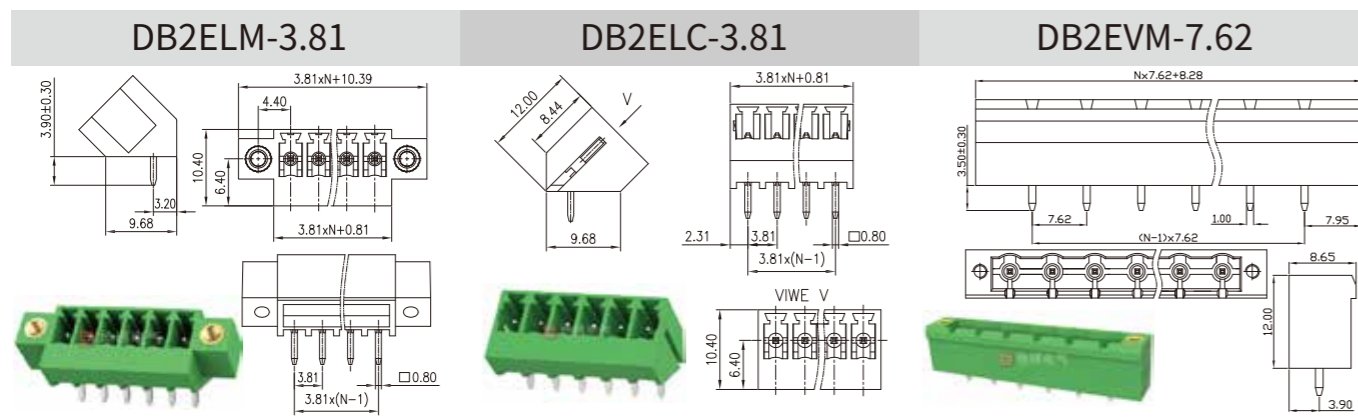


# 插拔式端子台 Plug-In terminal block

UL/CUL 技术参数 UL/CUL Technical Data		cRU US		
等级 Use Group	B C D	B	C	D
额定电压 Rated Voltage [V]	300 - 300	300	-	300
额定电流 Rated Current [A]	15 - 10	15	-	10
接线范围 Wire Range				
单/多芯线 Solid/Stranded [AWG]	-	-	-	-
间距 Pitch [mm]	7.05	5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-	-		

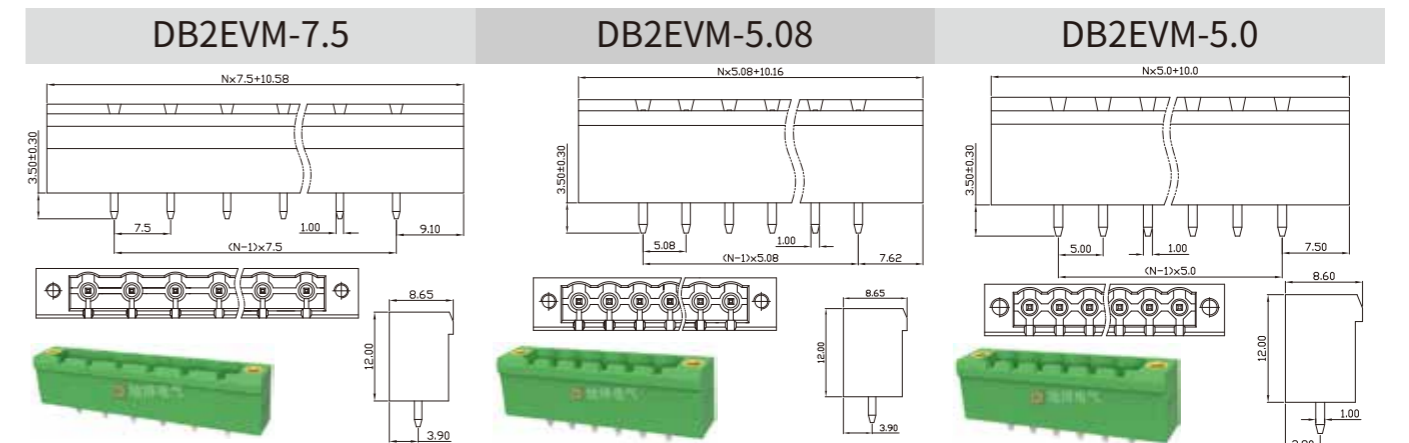


UL/CUL 技术参数 UL/CUL Technical Data		cRU US		
等级 Use Group	B C D	B	C	D
额定电压 Rated Voltage [V]	300 - 300	300	-	300
额定电流 Rated Current [A]	8 - 8	8	-	8
接线范围 Wire Range				
单/多芯线 Solid/Stranded [AWG]	-	-	-	-
间距 Pitch [mm]	3.81	3.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-	-		

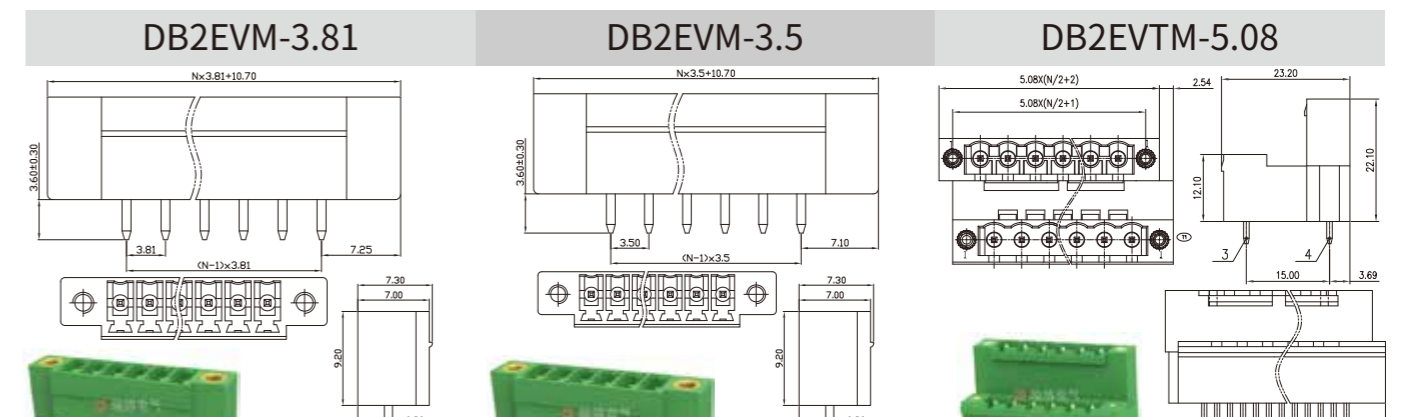


# 插拔式端子台 Plug-In terminal block

UL/CUL 技术参数 UL/CUL Technical Data				UL/CUL 技术参数 UL/CUL Technical Data				UL/CUL 技术参数 UL/CUL Technical Data			
等级 Use Group	B	C	D	等级 Use Group	B	C	D	等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300	额定电压 Rated Voltage [V]	300	-	300	额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	15	-	10	额定电流 Rated Current [A]	15	-	10	额定电流 Rated Current [A]	15	-	10
接线范围 Wire Range				接线范围 Wire Range				接线范围 Wire Range			
单/多芯线 Solid/Stranded [AWG]				单/多芯线 Solid/Stranded [AWG]				单/多芯线 Solid/Stranded [AWG]			
间距 Pitch [mm]	5.08			间距 Pitch [mm]	5.08			间距 Pitch [mm]	5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-			螺丝 Screw/扭矩 Torque(Max) [N.m]	-			螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

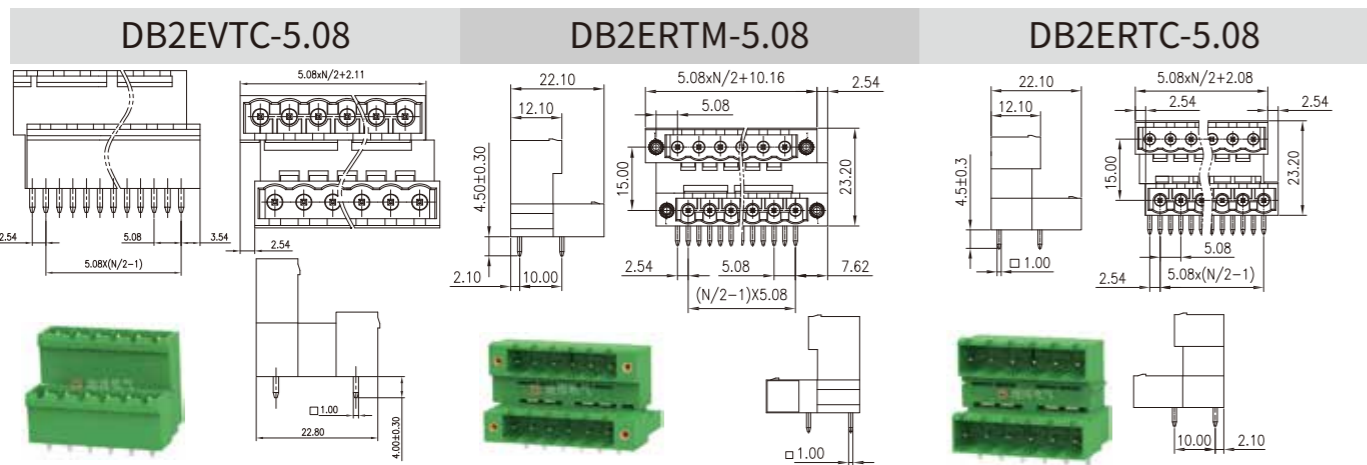


UL/CUL 技术参数 UL/CUL Technical Data				UL/CUL 技术参数 UL/CUL Technical Data				UL/CUL 技术参数 UL/CUL Technical Data			
等级 Use Group	B	C	D	等级 Use Group	B	C	D	等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300	额定电压 Rated Voltage [V]	300	-	300	额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	15	-	10	额定电流 Rated Current [A]	15	-	10	额定电流 Rated Current [A]	8	-	10
接线范围 Wire Range				接线范围 Wire Range				接线范围 Wire Range			
单/多芯线 Solid/Stranded [AWG]				单/多芯线 Solid/Stranded [AWG]				单/多芯线 Solid/Stranded [AWG]			
间距 Pitch [mm]	5.08			间距 Pitch [mm]	5.08			间距 Pitch [mm]	3.81		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-			螺丝 Screw/扭矩 Torque(Max) [N.m]	-			螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

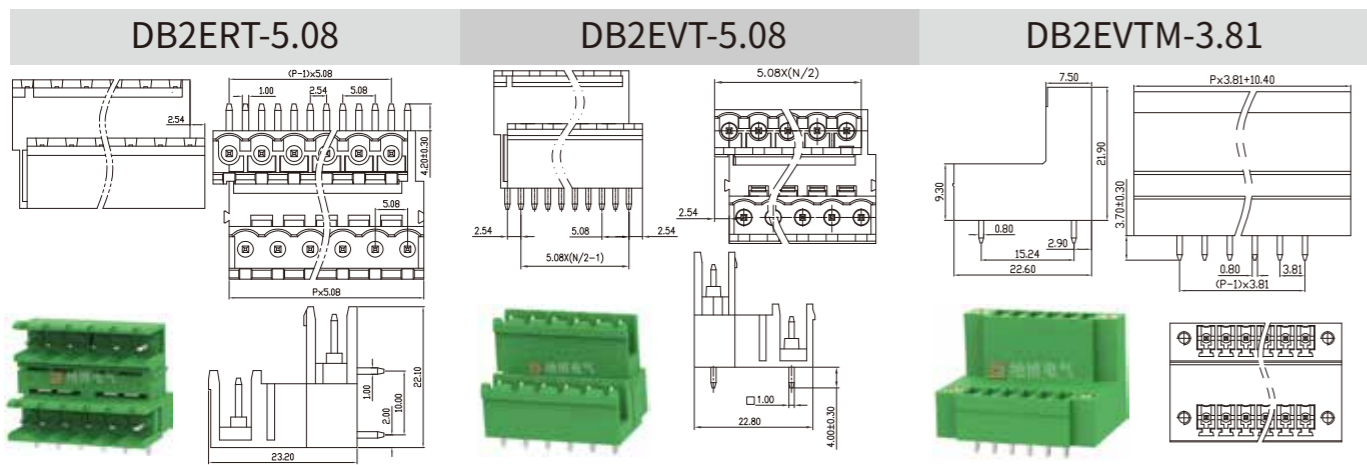


# 插拔式端子台 Plug-In terminal block

UL/CUL 技术参数 UL/CUL Technical Data				UL/CUL 技术参数 UL/CUL Technical Data				UL/CUL 技术参数 UL/CUL Technical Data			
等级 Use Group	B	C	D	等级 Use Group	B	C	D	等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300	额定电压 Rated Voltage [V]	300	-	300	额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	8	-	10	额定电流 Rated Current [A]	8	-	10	额定电流 Rated Current [A]	8	-	10
接线范围 Wire Range				接线范围 Wire Range				接线范围 Wire Range			
单/多芯线 Solid/Stranded [AWG]				单/多芯线 Solid/Stranded [AWG]				单/多芯线 Solid/Stranded [AWG]			
间距 Pitch [mm]	3.81			间距 Pitch [mm]	3.81			间距 Pitch [mm]	3.81		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-			螺丝 Screw/扭矩 Torque(Max) [N.m]	-			螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

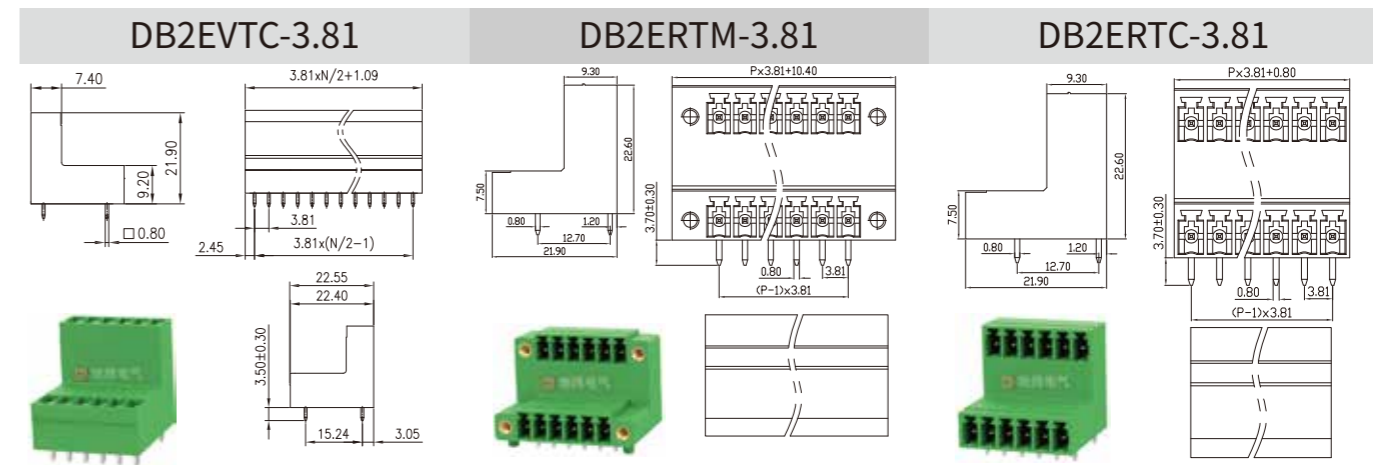

UL/CUL 技术参数 UL/CUL Technical Data				UL/CUL 技术参数 UL/CUL Technical Data				UL/CUL 技术参数 UL/CUL Technical Data			
等级 Use Group	B	C	D	等级 Use Group	B	C	D	等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300	额定电压 Rated Voltage [V]	300	-	300	额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	8	-	8	额定电流 Rated Current [A]	8	-	8	额定电流 Rated Current [A]	10	-	10
接线范围 Wire Range				接线范围 Wire Range				接线范围 Wire Range			
单/多芯线 Solid/Stranded [AWG]				单/多芯线 Solid/Stranded [AWG]				单/多芯线 Solid/Stranded [AWG]			
间距 Pitch [mm]	3.81			间距 Pitch [mm]	3.5			间距 Pitch [mm]	5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-			螺丝 Screw/扭矩 Torque(Max) [N.m]	-			螺丝 Screw/扭矩 Torque(Max) [N.m]	-		



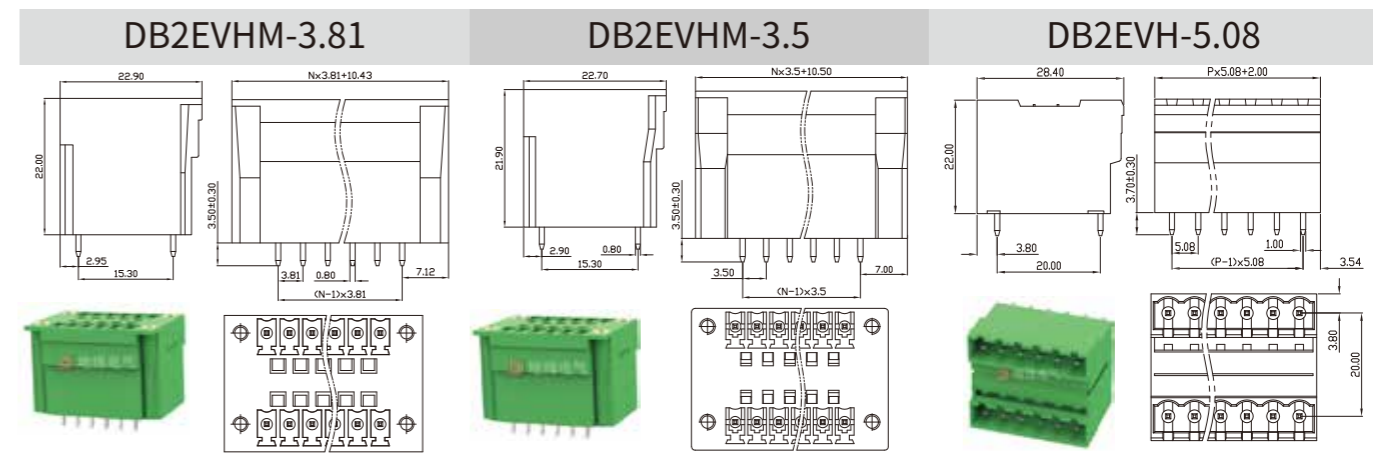


# 插拔式端子台 Plug-In terminal block

UL/CUL 技术参数 UL/CUL Technical Data			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	8	-	8
接线范围 Wire Range	-		
单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	3.81		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

UL/CUL 技术参数 UL/CUL Technical Data			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	8	-	8
接线范围 Wire Range	-		
单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	3.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		




UL/CUL 技术参数 UL/CUL Technical Data			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	125	-	-
额定电流 Rated Current [A]	4	-	-
接线范围 Wire Range	-		
单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	2.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

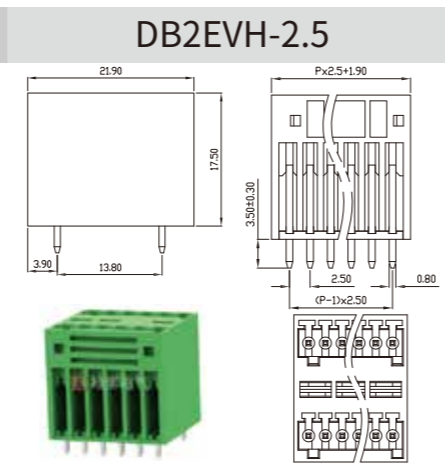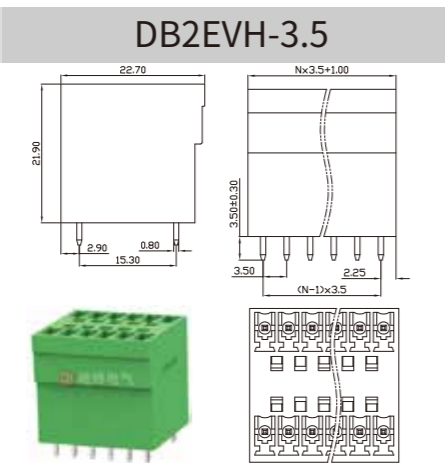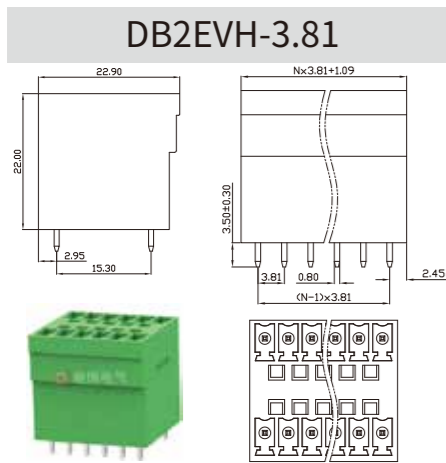

UL/CUL 技术参数 UL/CUL Technical Data			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	15	-	10
接线范围 Wire Range	-		
单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	10.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

UL/CUL 技术参数 UL/CUL Technical Data			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	15	-	10
接线范围 Wire Range	-		
单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	10.16		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

UL/CUL 技术参数 UL/CUL Technical Data			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	15	-	10
接线范围 Wire Range	-		
单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	10.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

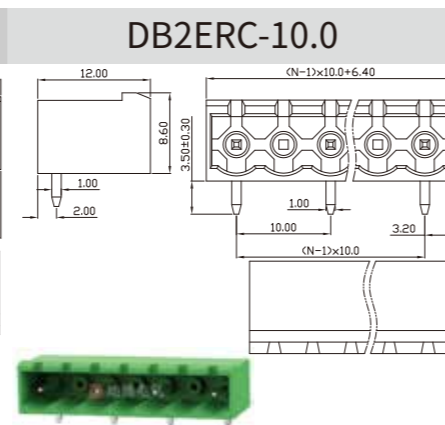
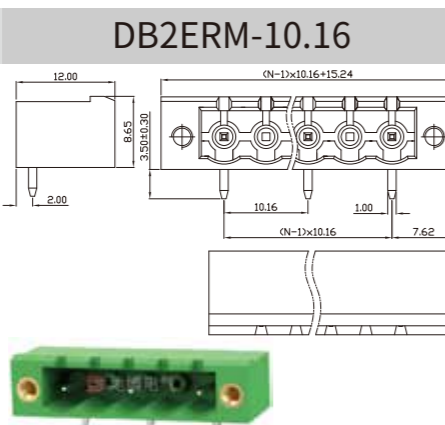
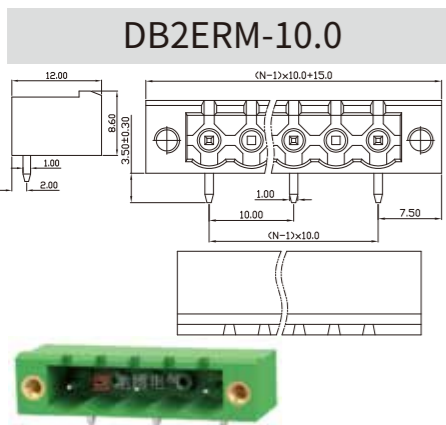


# 插拔式端子台 Plug-In terminal block

UL/CUL 技术参数 UL/CUL Technical Data			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	15	-	10
接线范围 Wire Range	-		
单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	10.16		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

UL/CUL 技术参数 UL/CUL Technical Data			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	15	-	10
接线范围 Wire Range	-		
单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	10.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		




UL/CUL 技术参数 UL/CUL Technical Data			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	15	-	10
接线范围 Wire Range	-		
单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	10.16		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

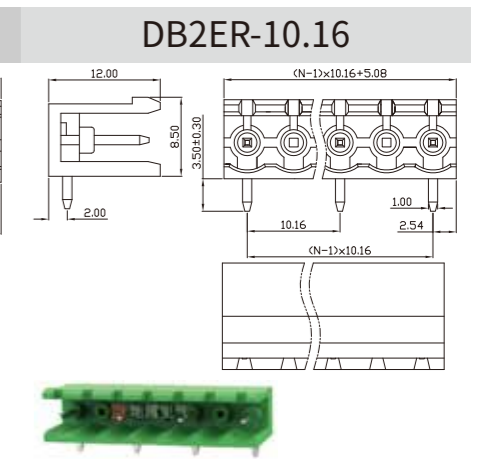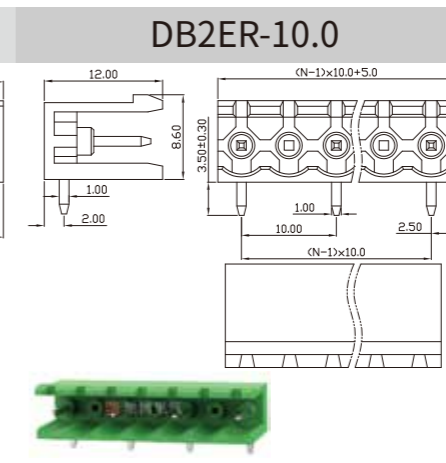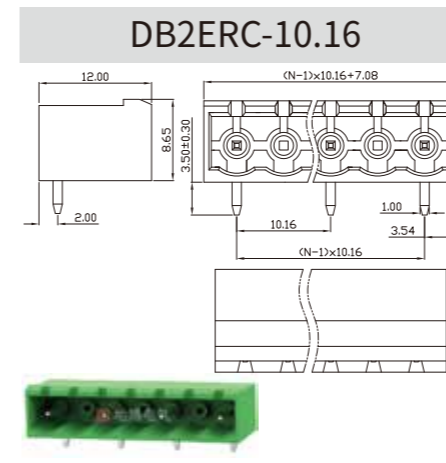

UL/CUL 技术参数 UL/CUL Technical Data			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	15	-	10
接线范围 Wire Range	-		
单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	10.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

UL/CUL 技术参数 UL/CUL Technical Data			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	15	-	10
接线范围 Wire Range	-		
单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	10.16		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

UL/CUL 技术参数 UL/CUL Technical Data			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	15	-	10
接线范围 Wire Range	-		
单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	10.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

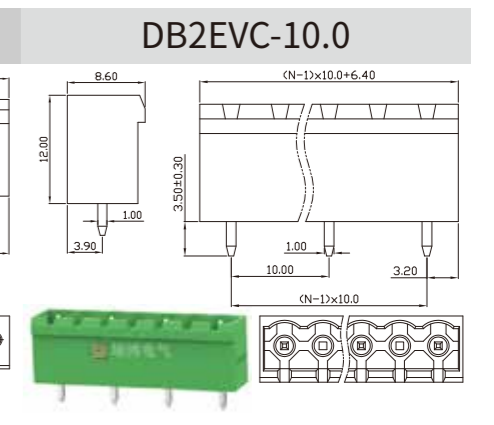
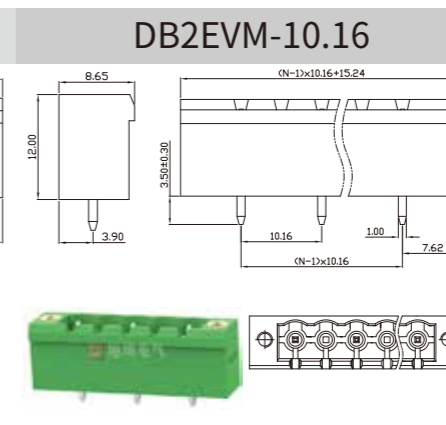
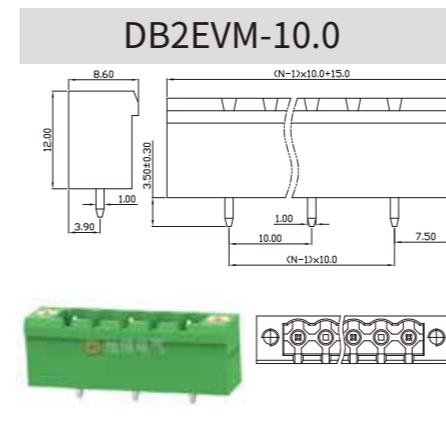


# 插拔式端子台 Plug-In terminal block

UL/CUL 技术参数 UL/CUL Technical Data			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	15	-	10
接线范围 Wire Range	-		
单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	10.16		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

UL/CUL 技术参数 UL/CUL Technical Data			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	15	-	10
接线范围 Wire Range	-		
单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	10.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		




UL/CUL 技术参数 UL/CUL Technical Data			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	15	-	10
接线范围 Wire Range	-		
单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	10.16		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

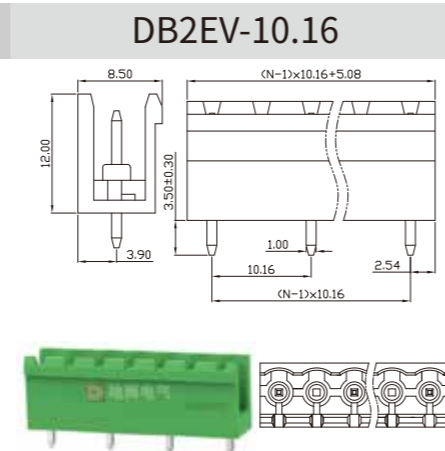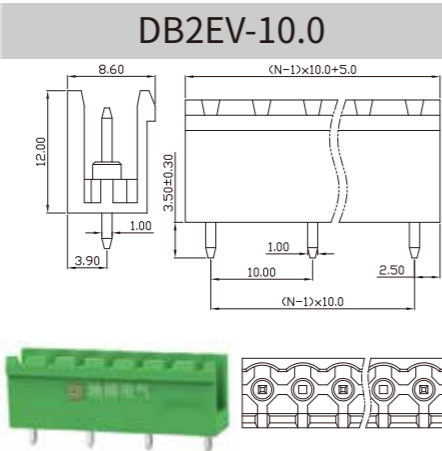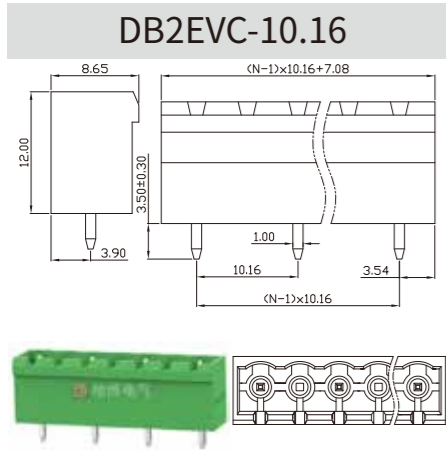

UL/CUL 技术参数 UL/CUL Technical Data			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	15	-	10
接线范围 Wire Range	-		
单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	7.62		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

UL/CUL 技术参数 UL/CUL Technical Data			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	15	-	10
接线范围 Wire Range	-		
单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	7.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

UL/CUL 技术参数 UL/CUL Technical Data			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	15	-	10
接线范围 Wire Range	-		
单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

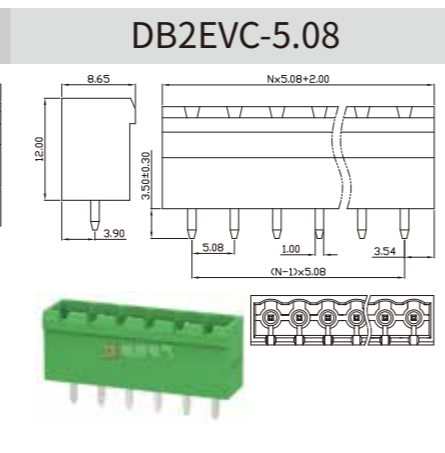
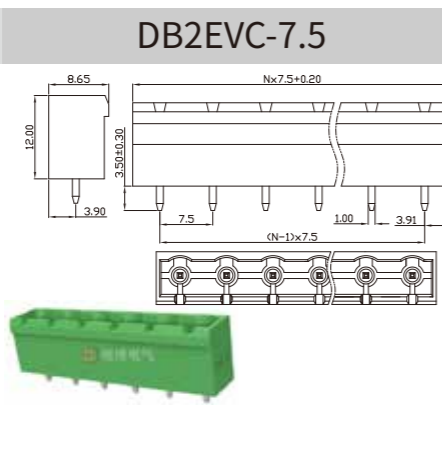
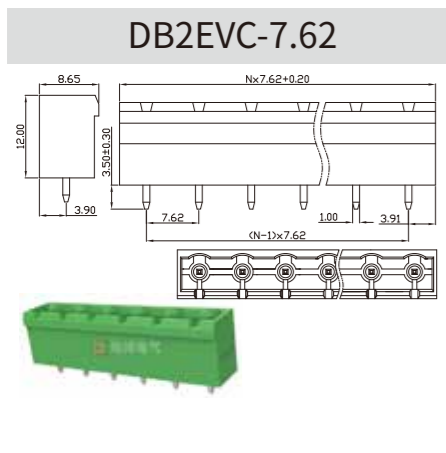


# 插拔式端子台 Plug-In terminal block

UL/CUL 技术参数 UL/CUL Technical Data			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	15	-	10
接线范围 Wire Range	-		
单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	5.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

UL/CUL 技术参数 UL/CUL Technical Data			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	12	-	10
接线范围 Wire Range	-		
单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	3.81		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		




UL/CUL 技术参数 UL/CUL Technical Data			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	12	-	10
接线范围 Wire Range	-		
单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	3.81		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

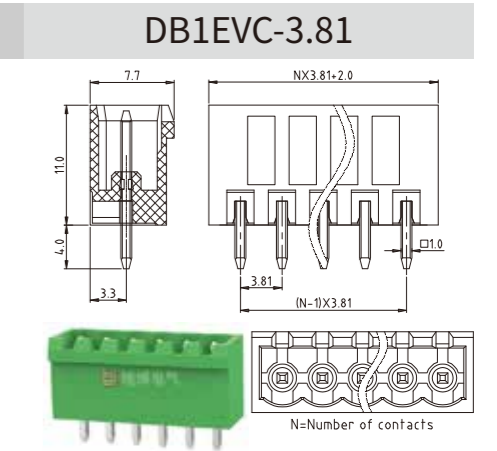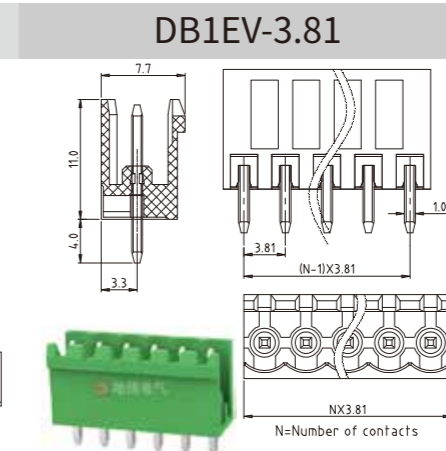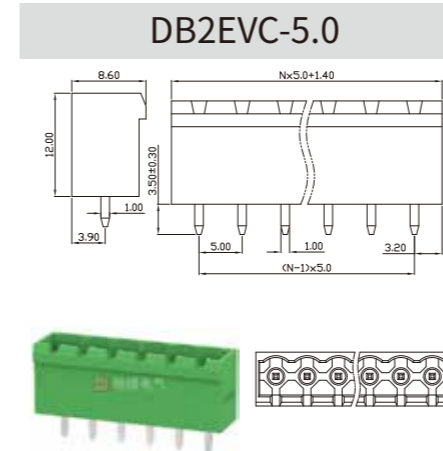

UL/CUL 技术参数 UL/CUL Technical Data			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	8	-	8
接线范围 Wire Range	-		
单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

UL/CUL 技术参数 UL/CUL Technical Data			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	8	-	8
接线范围 Wire Range	-		
单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	3.81		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

UL/CUL 技术参数 UL/CUL Technical Data			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	8	-	8
接线范围 Wire Range	-		
单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	3.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

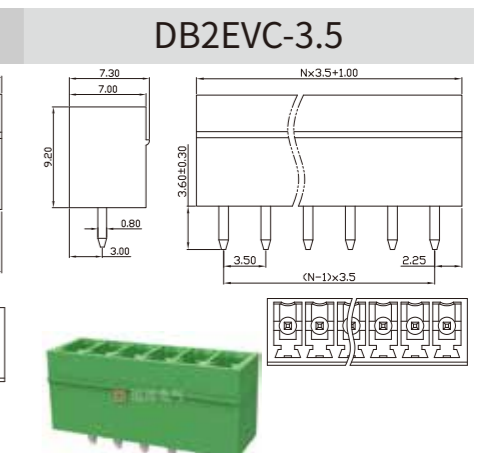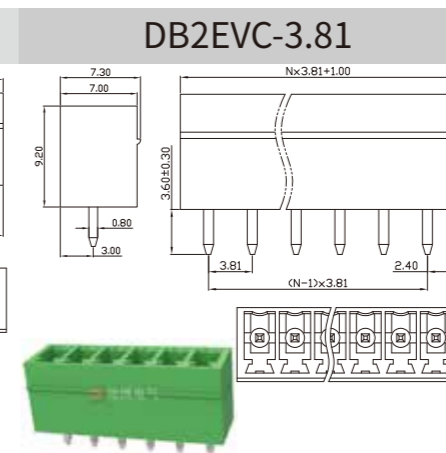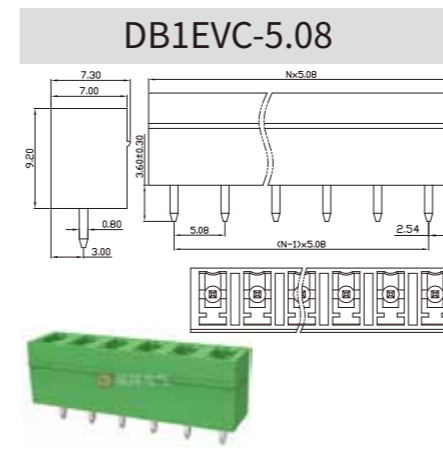

# 插拔式端子台 Plug-In terminal block

## UL/CUL 技术参数 UL/CUL Technical Data

等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	150	-	-
额定电流 Rated Current [A]	5	-	-
接线范围 Wire Range	-		
单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	2.54		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		


## UL/CUL 技术参数 UL/CUL Technical Data

等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	150	-	-
额定电流 Rated Current [A]	5	-	-
接线范围 Wire Range	-		
单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	3.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		


## UL/CUL 技术参数 UL/CUL Technical Data

等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	15	-	10
接线范围 Wire Range	-		
单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	7.62		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		


DB2EVC-2.54

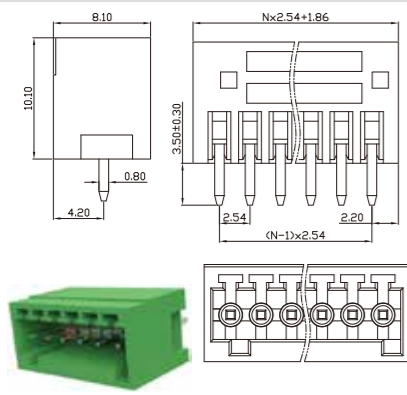

DB2EVC-2.5

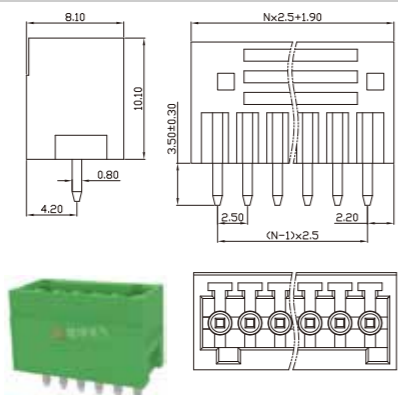

DB2EV-7.62

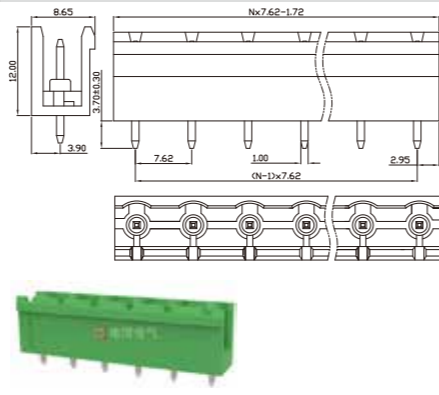

## UL/CUL 技术参数 UL/CUL Technical Data

等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	15	-	10
接线范围 Wire Range	-		
单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	7.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		


## UL/CUL 技术参数 UL/CUL Technical Data

等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	15	-	10
接线范围 Wire Range	-		
单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		


## UL/CUL 技术参数 UL/CUL Technical Data

等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	15	-	10
接线范围 Wire Range	-		
单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	5.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		


DB2EV-7.5

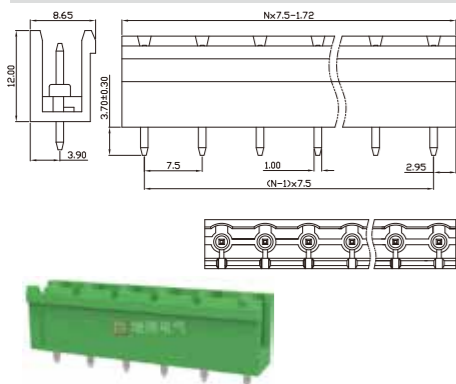

DB2EV-5.08

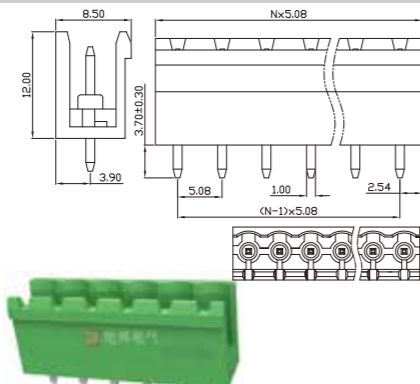

DB2EV-5.0

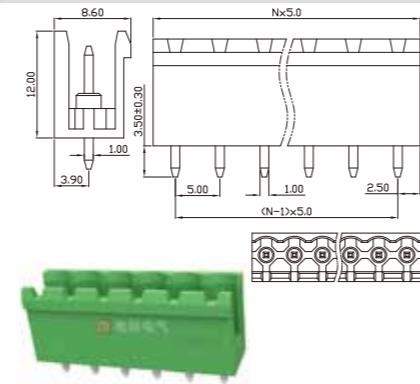

# 插拔式端子台 Plug-In terminal block

## UL/CUL 技术参数 UL/CUL Technical Data

等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	15	-	10
接线范围 Wire Range	-		
单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	7.62		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		


## UL/CUL 技术参数 UL/CUL Technical Data

等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	15	-	10
接线范围 Wire Range	-		
单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	7.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		


## UL/CUL 技术参数 UL/CUL Technical Data

等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	15	-	10
接线范围 Wire Range	-		
单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		


DB2ERM-7.62

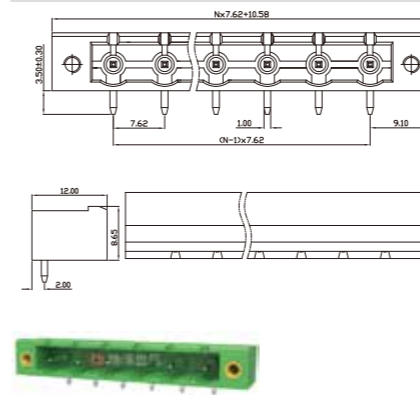

DB2ERM-7.5

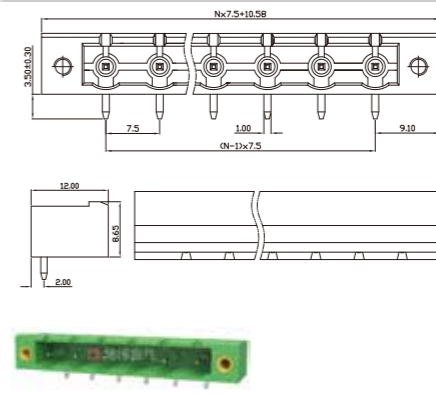

DB2ERM-5.08

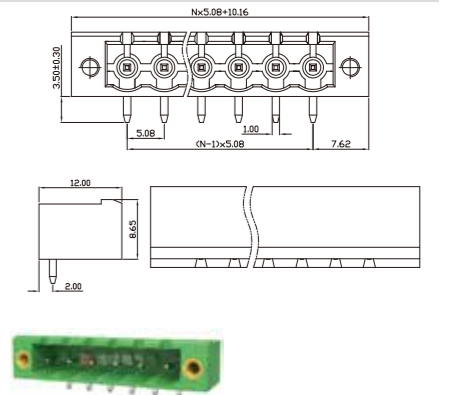

## UL/CUL 技术参数 UL/CUL Technical Data

等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	15	-	10
接线范围 Wire Range	-		
单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	5.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		


## UL/CUL 技术参数 UL/CUL Technical Data

等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	8	-	8
接线范围 Wire Range	-		
单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		


## UL/CUL 技术参数 UL/CUL Technical Data

等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	8	-	8
接线范围 Wire Range	-		
单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	3.81		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		


DB2ERM-5.0

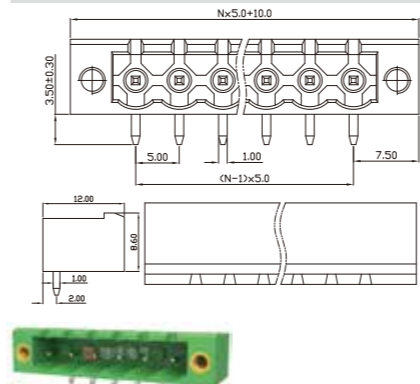

DB1ERM-5.08



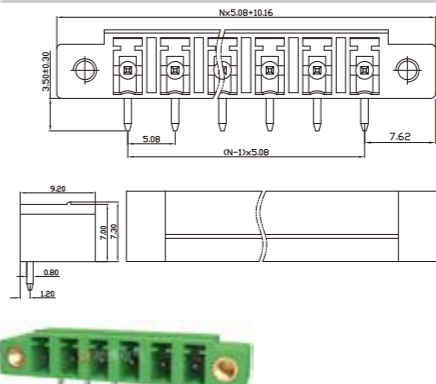


DB2ERM-3.81



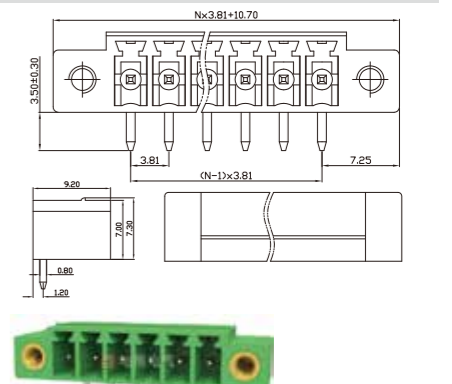


# 插拔式端子台 Plug-In terminal block

UL/CUL 技术参数 UL/CUL Technical Data		C RU US		
等级 Use Group	B C D	B	C	D
额定电压 Rated Voltage [V]	300 - 300	300	-	300
额定电流 Rated Current [A]	8 - 8	8	-	8
接线范围 Wire Range	-	-	-	-
单/多芯线 Solid/Stranded [AWG]	-	-	-	-
间距 Pitch [mm]	3.5	3.5	3.5	3.5
螺丝 Screw/扭矩 Torque(Max) [N.m]	-	-	-	-

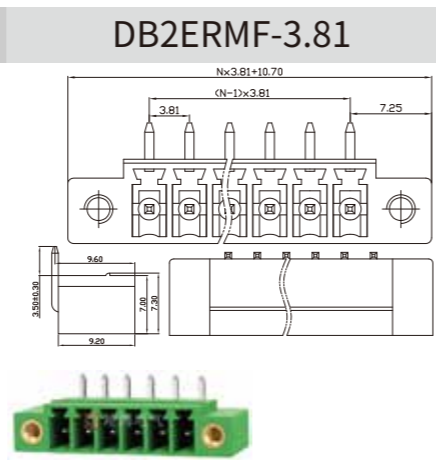
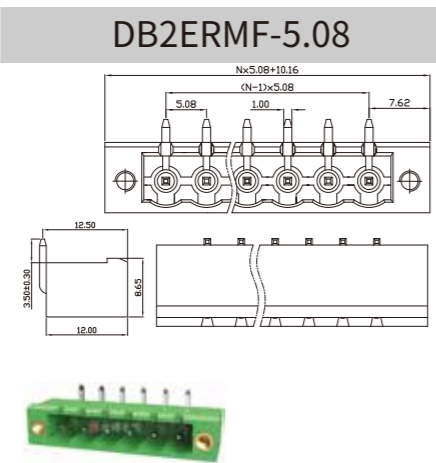
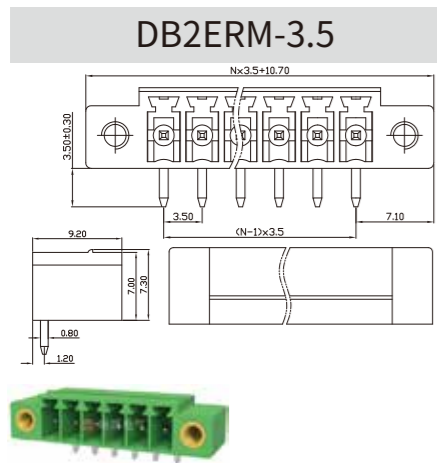


UL/CUL 技术参数 UL/CUL Technical Data		C RU US		
等级 Use Group	B C D	B	C	D
额定电压 Rated Voltage [V]	300 - 300	300	-	300
额定电流 Rated Current [A]	8 - 8	8	-	8
接线范围 Wire Range	-	-	-	-
单/多芯线 Solid/Stranded [AWG]	-	-	-	-
间距 Pitch [mm]	3.5	3.5	3.5	3.5
螺丝 Screw/扭矩 Torque(Max) [N.m]	-	-	-	-

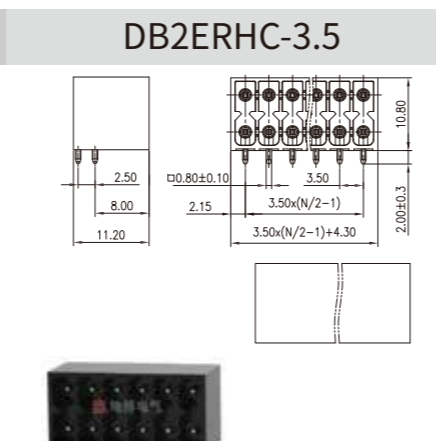
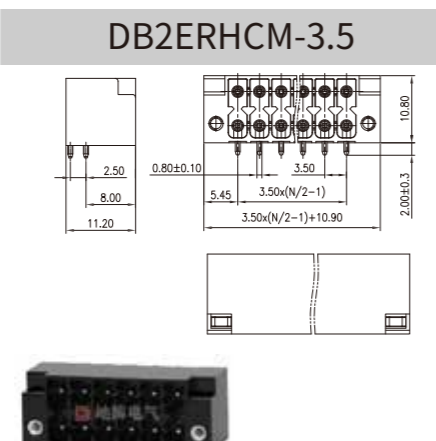
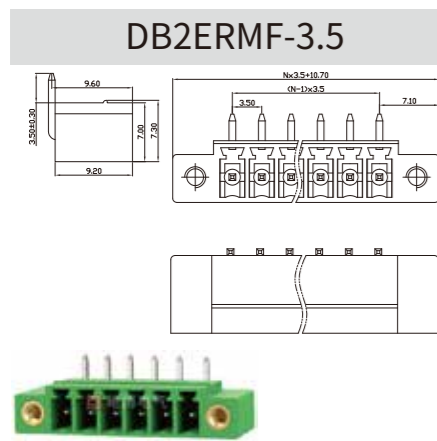


# 插拔式端子台 Plug-In terminal block

UL/CUL 技术参数 UL/CUL Technical Data		C RU US		
等级 Use Group	B C D	B	C	D
额定电压 Rated Voltage [V]	150 50 -	150	50	-
额定电流 Rated Current [A]	8 8 -	8	8	-
接线范围 Wire Range	-	-	-	-
单/多芯线 Solid/Stranded [AWG]	-	-	-	-
间距 Pitch [mm]	3.5	3.5	3.5	3.5
螺丝 Screw/扭矩 Torque(Max) [N.m]	-	-	-	-

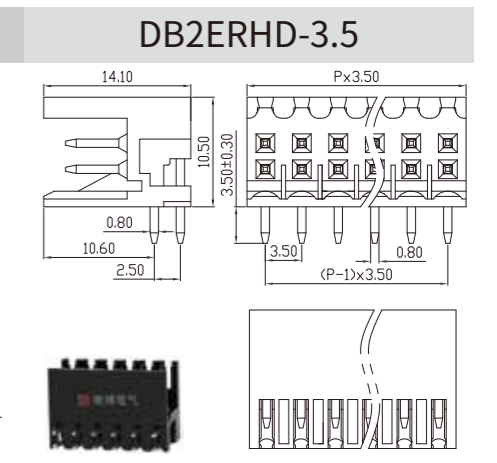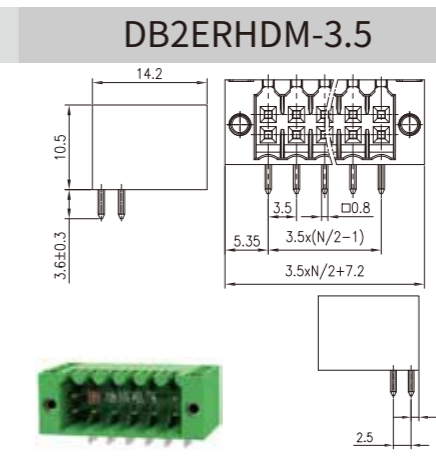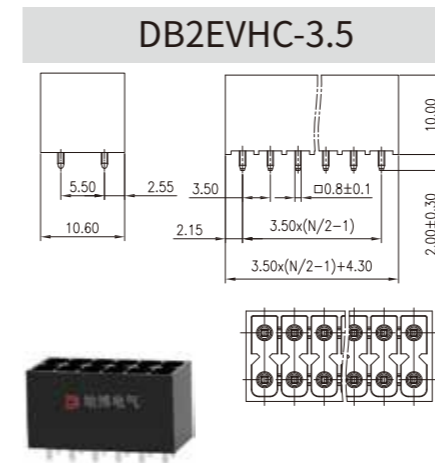

UL/CUL 技术参数 UL/CUL Technical Data		C RU US		
等级 Use Group	B C D	B	C	D
额定电压 Rated Voltage [V]	150 50 -	150	50	-
额定电流 Rated Current [A]	10 10 -	10	10	-
接线范围 Wire Range	-	-	-	-
单/多芯线 Solid/Stranded [AWG]	-	-	-	-
间距 Pitch [mm]	3.5	3.5	3.5	3.5
螺丝 Screw/扭矩 Torque(Max) [N.m]	-	-	-	-

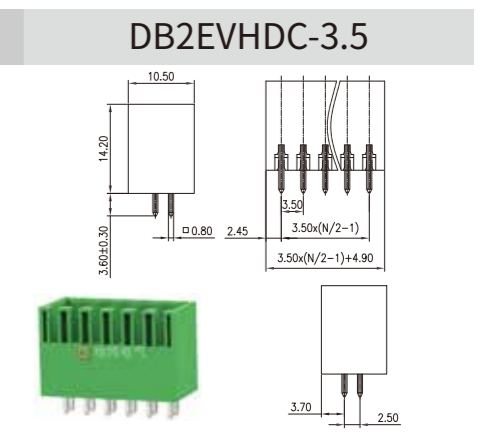
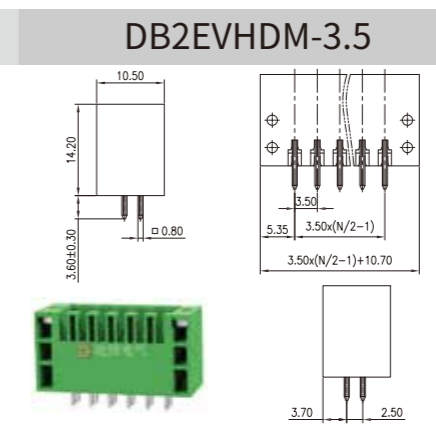
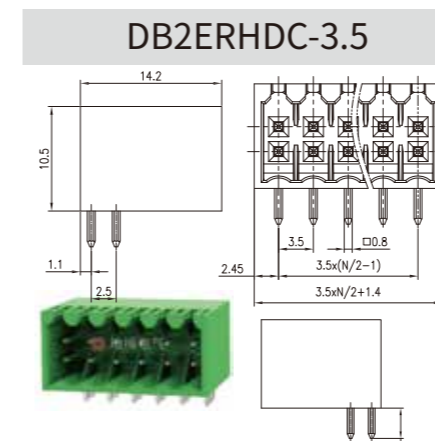


# 插拔式端子台 Plug-In terminal block

UL/CUL 技术参数 UL/CUL Technical Data	CUL US		
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	8	-	10
接线范围 Wire Range	-		
单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	3.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

UL/CUL 技术参数 UL/CUL Technical Data	CUL US		
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	8	-	10
接线范围 Wire Range	-		
单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	3.81		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

UL/CUL 技术参数 UL/CUL Technical Data	CUL US		
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	8	-	8
接线范围 Wire Range	-		
单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	3.81		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

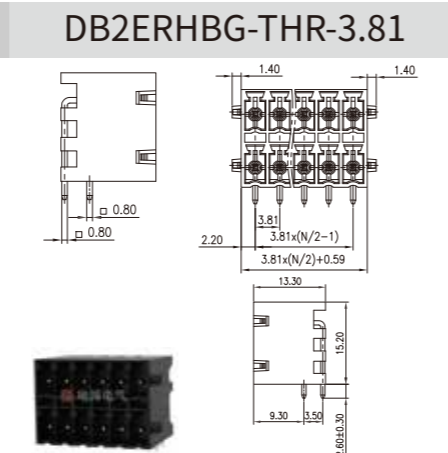
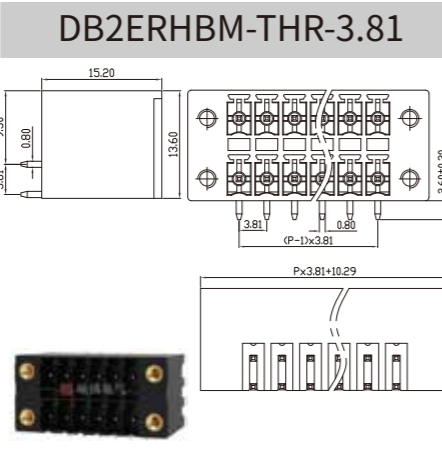
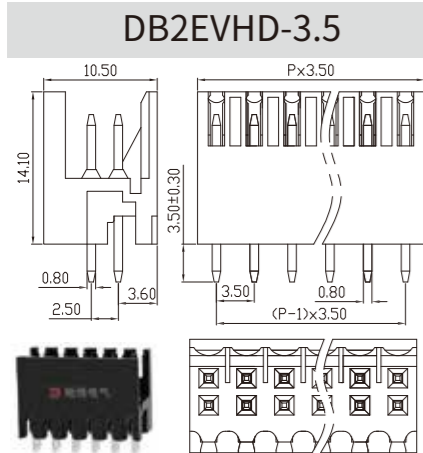


# 插拔式端子台 Plug-In terminal block

UL/CUL 技术参数 UL/CUL Technical Data	CUL US		
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	8	-	8
接线范围 Wire Range	-		
单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	3.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

UL/CUL 技术参数 UL/CUL Technical Data	CUL US		
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	8	-	10
接线范围 Wire Range	-		
单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	3.81		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

UL/CUL 技术参数 UL/CUL Technical Data	CUL US		
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	8	-	10
接线范围 Wire Range	-		
单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	3.81		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

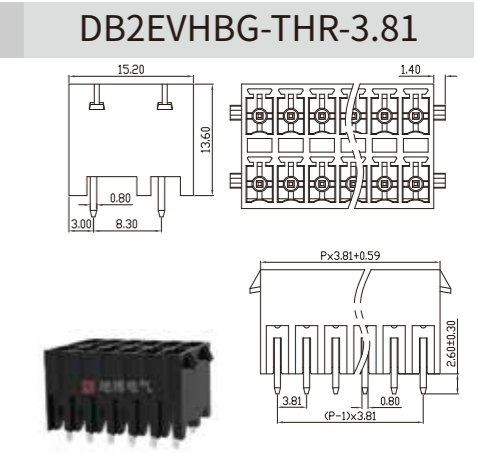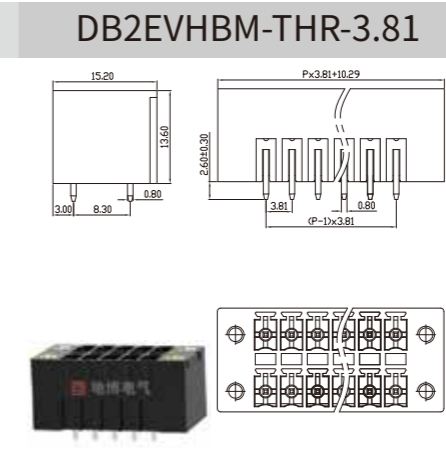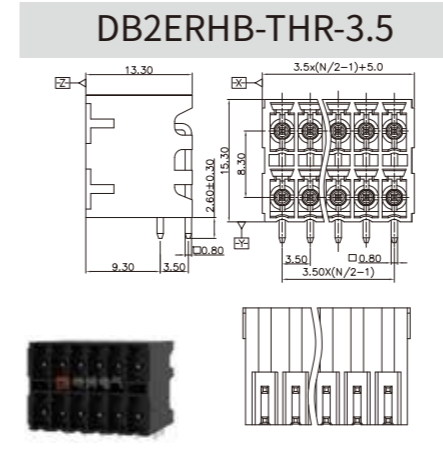

UL/CUL 技术参数 UL/CUL Technical Data	CUL US		
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	8	-	8
接线范围 Wire Range	-		
单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	3.81		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		







UL/CUL 技术参数 UL/CUL Technical Data	CUL US		
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	8	-	10
接线范围 Wire Range	-		
单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	3.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

UL/CUL 技术参数 UL/CUL Technical Data	CUL US		
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	8	-	10
接线范围 Wire Range	-		
单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	3.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

UL/CUL 技术参数 UL/CUL Technical Data	CUL US		
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	8	-	10
接线范围 Wire Range	-		
单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	3.81		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

UL/CUL 技术参数 UL/CUL Technical Data	CUL US		
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	8	-	10
接线范围 Wire Range	-		
单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	3.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		


UL/CUL 技术参数 UL/CUL Technical Data	CUL US		
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	8	-	10
接线范围 Wire Range	-		
单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	3.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

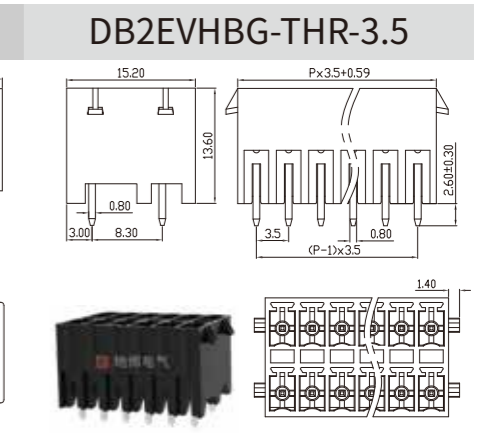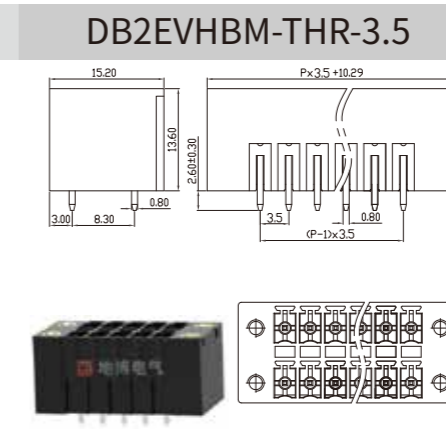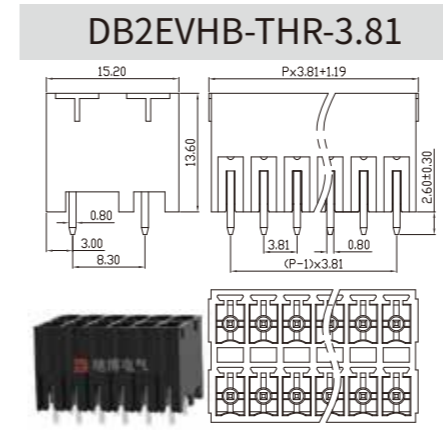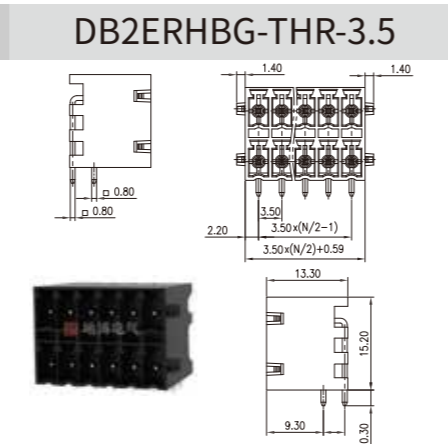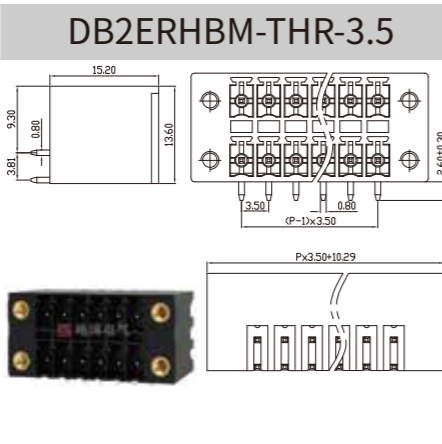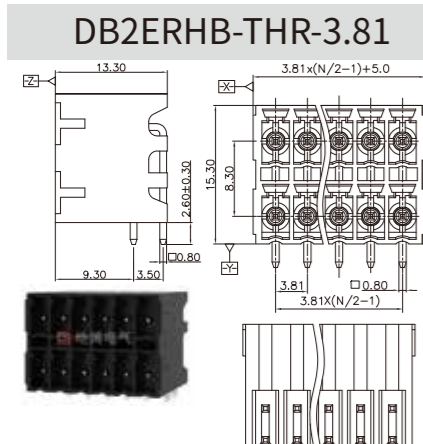




# 插拔式端子台 Plug-In terminal block

UL/CUL 技术参数 UL/CUL Technical Data				UL/CUL 技术参数 UL/CUL Technical Data				UL/CUL 技术参数 UL/CUL Technical Data			
等级 Use Group	B	C	D	等级 Use Group	B	C	D	等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300	额定电压 Rated Voltage [V]	300	-	300	额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	8	-	10	额定电流 Rated Current [A]	15	-	10	额定电流 Rated Current [A]	8	-	8
接线范围 Wire Range				接线范围 Wire Range				接线范围 Wire Range			
单/多芯线 Solid/Stranded [AWG]	-			单/多芯线 Solid/Stranded [AWG]	-			单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	3.5			间距 Pitch [mm]	5.08			间距 Pitch [mm]	3.81		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-			螺丝 Screw/扭矩 Torque(Max) [N.m]	M2.5/0.3			螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

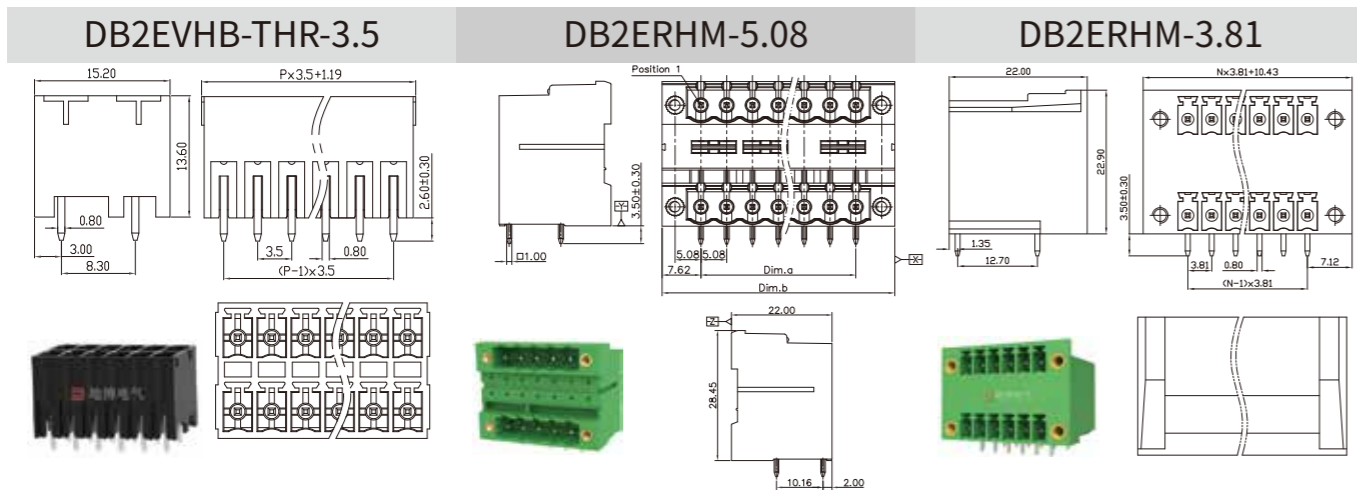


UL/CUL 技术参数 UL/CUL Technical Data				UL/CUL 技术参数 UL/CUL Technical Data				UL/CUL 技术参数 UL/CUL Technical Data			
等级 Use Group	B	C	D	等级 Use Group	B	C	D	等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300	额定电压 Rated Voltage [V]	300	-	300	额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	8	-	8	额定电流 Rated Current [A]	15	-	10	额定电流 Rated Current [A]	8	-	8
接线范围 Wire Range				接线范围 Wire Range				接线范围 Wire Range			
单/多芯线 Solid/Stranded [AWG]	-			单/多芯线 Solid/Stranded [AWG]	-			单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	3.5			间距 Pitch [mm]	5.08			间距 Pitch [mm]	3.81		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-			螺丝 Screw/扭矩 Torque(Max) [N.m]	-			螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

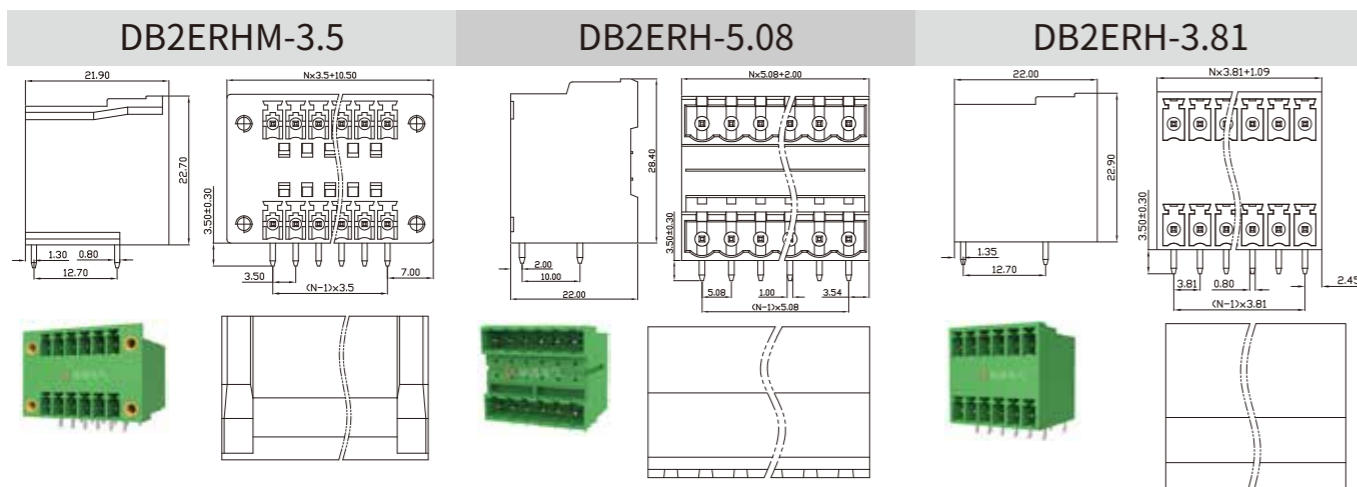


# 插拔式端子台 Plug-In terminal block

UL/CUL 技术参数 UL/CUL Technical Data				UL/CUL 技术参数 UL/CUL Technical Data				UL/CUL 技术参数 UL/CUL Technical Data			
等级 Use Group	B	C	D	等级 Use Group	B	C	D	等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300	额定电压 Rated Voltage [V]	125	-	-	额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	8	-	8	额定电流 Rated Current [A]	4	-	-	额定电流 Rated Current [A]	15	-	10
接线范围 Wire Range				接线范围 Wire Range				接线范围 Wire Range			
单/多芯线 Solid/Stranded [AWG]	-			单/多芯线 Solid/Stranded [AWG]	-			单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	3.5			间距 Pitch [mm]	2.5			间距 Pitch [mm]	5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-			螺丝 Screw/扭矩 Torque(Max) [N.m]	-			螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

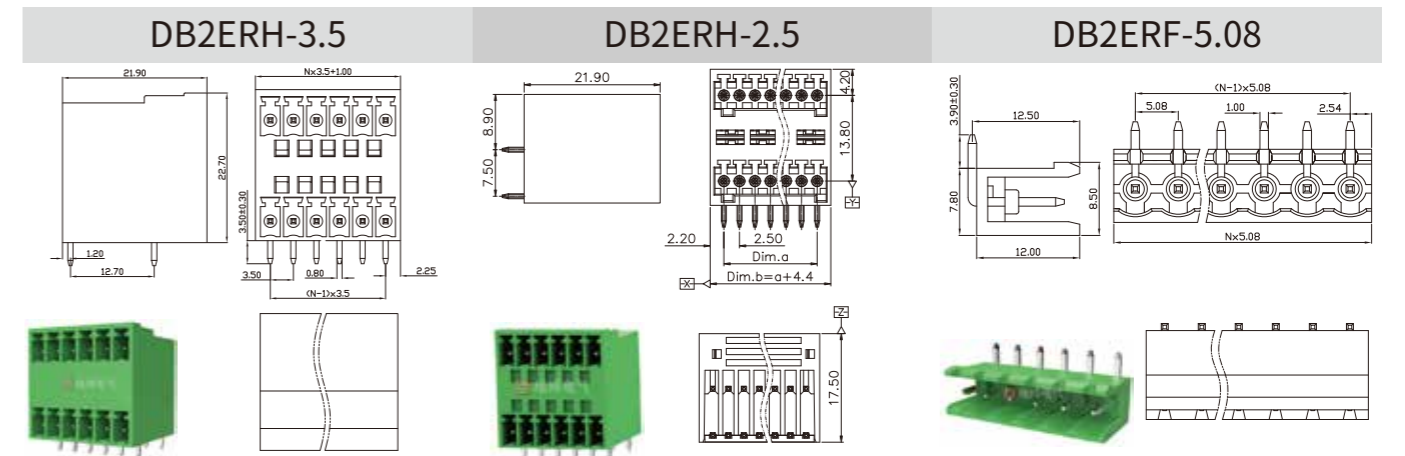


UL/CUL 技术参数 UL/CUL Technical Data				UL/CUL 技术参数 UL/CUL Technical Data				UL/CUL 技术参数 UL/CUL Technical Data			
等级 Use Group	B	C	D	等级 Use Group	B	C	D	等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300	额定电压 Rated Voltage [V]	300	-	300	额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	15	-	10	额定电流 Rated Current [A]	8	-	8	额定电流 Rated Current [A]	8	-	8
接线范围 Wire Range				接线范围 Wire Range				接线范围 Wire Range			
单/多芯线 Solid/Stranded [AWG]	-			单/多芯线 Solid/Stranded [AWG]	-			单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	5.08			间距 Pitch [mm]	3.81			间距 Pitch [mm]	3.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-			螺丝 Screw/扭矩 Torque(Max) [N.m]	-			螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

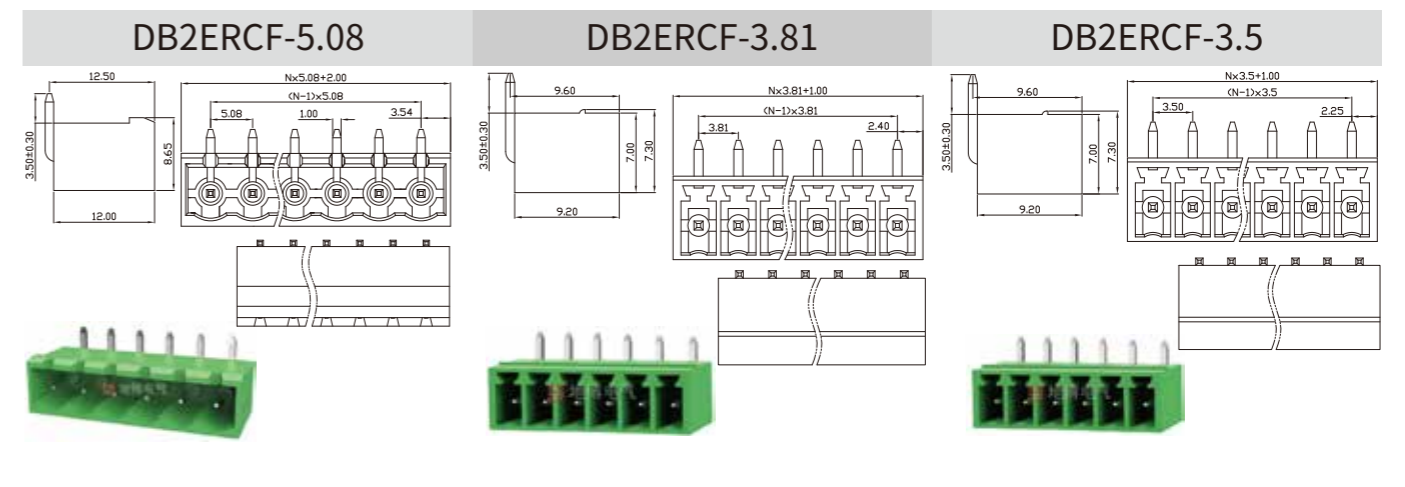


# 插拔式端子台 Plug-In terminal block

UL/CUL 技术参数 UL/CUL Technical Data				UL/CUL 技术参数 UL/CUL Technical Data				UL/CUL 技术参数 UL/CUL Technical Data			
等级 Use Group	B	C	D	等级 Use Group	B	C	D	等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300	额定电压 Rated Voltage [V]	300	-	300	额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	15	-	10	额定电流 Rated Current [A]	15	-	10	额定电流 Rated Current [A]	15	-	10
接线范围 Wire Range				接线范围 Wire Range				接线范围 Wire Range			
单/多芯线 Solid/Stranded [AWG]	-			单/多芯线 Solid/Stranded [AWG]	-			单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	7.62			间距 Pitch [mm]	7.5			间距 Pitch [mm]	5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-			螺丝 Screw/扭矩 Torque(Max) [N.m]	-			螺丝 Screw/扭矩 Torque(Max) [N.m]	-		


DB2ERC-7.62

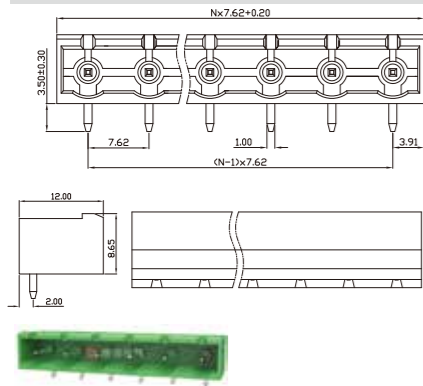

DB2ERC-7.5

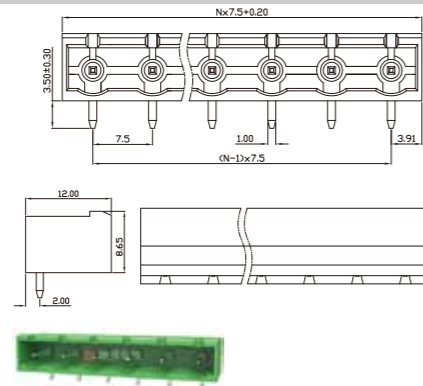


DB2ERC-5.08

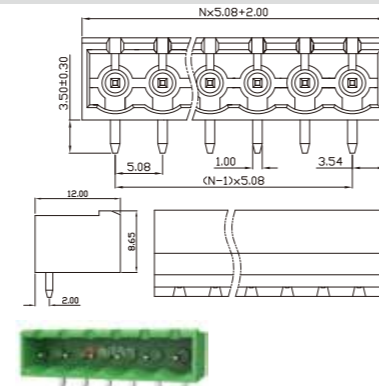


UL/CUL 技术参数 UL/CUL Technical Data				UL/CUL 技术参数 UL/CUL Technical Data				UL/CUL 技术参数 UL/CUL Technical Data			
等级 Use Group	B	C	D	等级 Use Group	B	C	D	等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300	额定电压 Rated Voltage [V]	300	-	300	额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	15	-	10	额定电流 Rated Current [A]	12	-	10	额定电流 Rated Current [A]	12	-	10
接线范围 Wire Range				接线范围 Wire Range				接线范围 Wire Range			
单/多芯线 Solid/Stranded [AWG]	-			单/多芯线 Solid/Stranded [AWG]	-			单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	5.0			间距 Pitch [mm]	3.81			间距 Pitch [mm]	3.81		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-			螺丝 Screw/扭矩 Torque(Max) [N.m]	-			螺丝 Screw/扭矩 Torque(Max) [N.m]	-		


DB2ERC-5.0

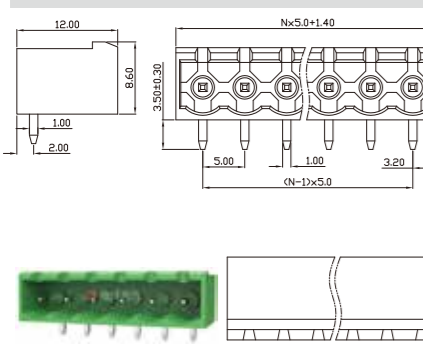

DB1ER-3.81

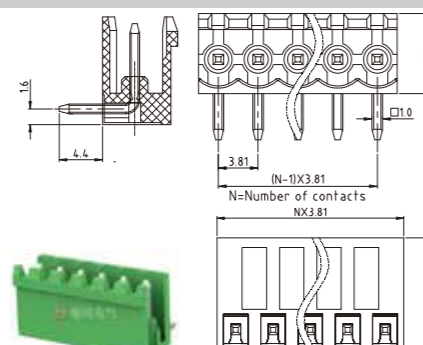


DB1ERC-3.81

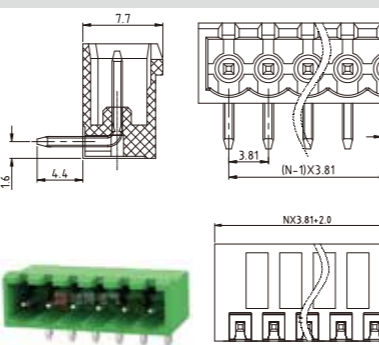


# 插拔式端子台 Plug-In terminal block

UL/CUL 技术参数 UL/CUL Technical Data				UL/CUL 技术参数 UL/CUL Technical Data				UL/CUL 技术参数 UL/CUL Technical Data			
等级 Use Group	B	C	D	等级 Use Group	B	C	D	等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300	额定电压 Rated Voltage [V]	300	-	300	额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	8	-	8	额定电流 Rated Current [A]	8	-	8	额定电流 Rated Current [A]	12	-	10
接线范围 Wire Range				接线范围 Wire Range				接线范围 Wire Range			
单/多芯线 Solid/Stranded [AWG]	-			单/多芯线 Solid/Stranded [AWG]	-			单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	5.08			间距 Pitch [mm]	3.81			间距 Pitch [mm]	3.81		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-			螺丝 Screw/扭矩 Torque(Max) [N.m]	-			螺丝 Screw/扭矩 Torque(Max) [N.m]	-		


DB1ERC-5.08

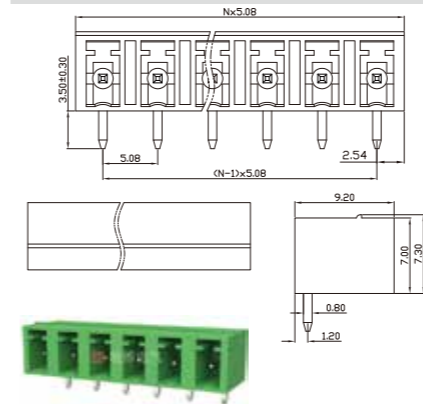

DB2ERG-3.81

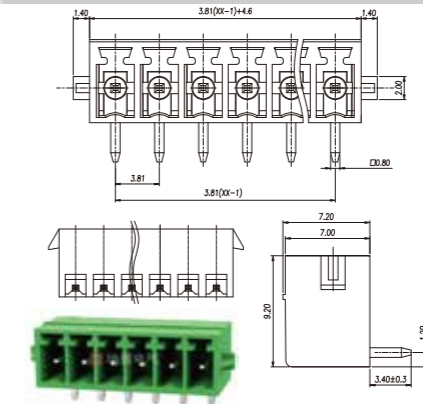


DB2ERC-3.81

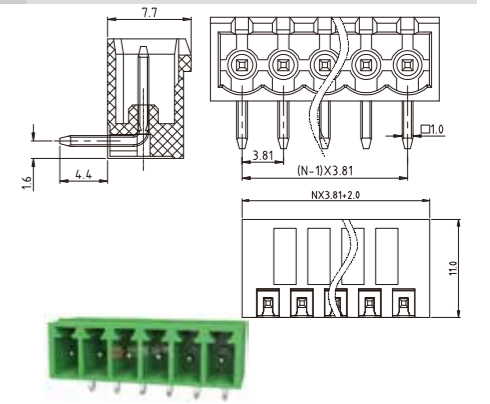


UL/CUL 技术参数 UL/CUL Technical Data				UL/CUL 技术参数 UL/CUL Technical Data				UL/CUL 技术参数 UL/CUL Technical Data			
等级 Use Group	B	C	D	等级 Use Group	B	C	D	等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300	额定电压 Rated Voltage [V]	300	-	300	额定电压 Rated Voltage [V]	150	-	-
额定电流 Rated Current [A]	8	-	8	额定电流 Rated Current [A]	8	-	8	额定电流 Rated Current [A]	5	-	-
接线范围 Wire Range				接线范围 Wire Range				接线范围 Wire Range			
单/多芯线 Solid/Stranded [AWG]	-			单/多芯线 Solid/Stranded [AWG]	-			单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	3.5			间距 Pitch [mm]	3.5			间距 Pitch [mm]	2.54		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-			螺丝 Screw/扭矩 Torque(Max) [N.m]	-			螺丝 Screw/扭矩 Torque(Max) [N.m]	-		


DB2ERG-3.5

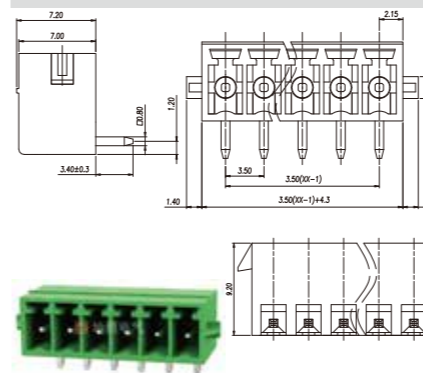

DB2ERC-3.5

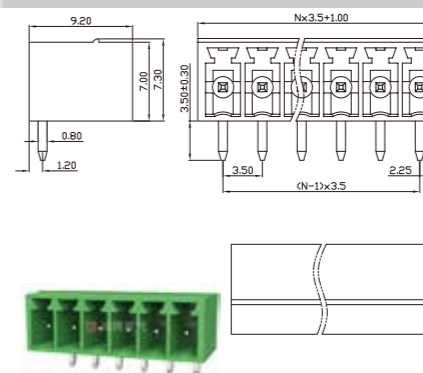

DB2ERC-2.54

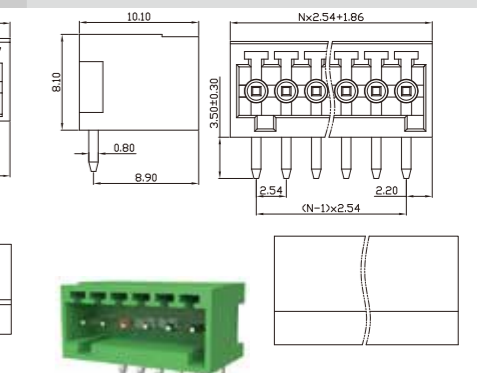

# 插拔式端子台 Plug-In terminal block

## UL/CUL 技术参数 UL/CUL Technical Data




等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	150	-	-
额定电流 Rated Current [A]	5	-	-
接线范围 Wire Range	-		
单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	2.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

## UL/CUL 技术参数 UL/CUL Technical Data

等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	15	-	10
接线范围 Wire Range	-		
单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	7.62		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

## UL/CUL 技术参数 UL/CUL Technical Data

等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	15	-	10
接线范围 Wire Range	-		
单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	7.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

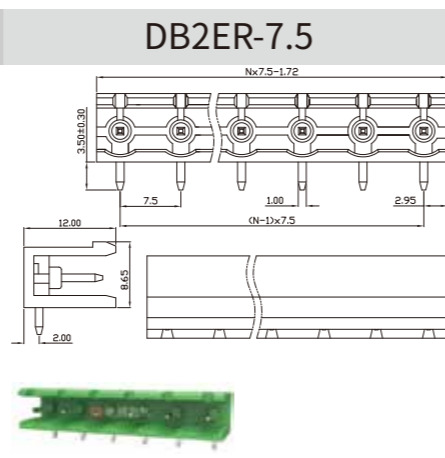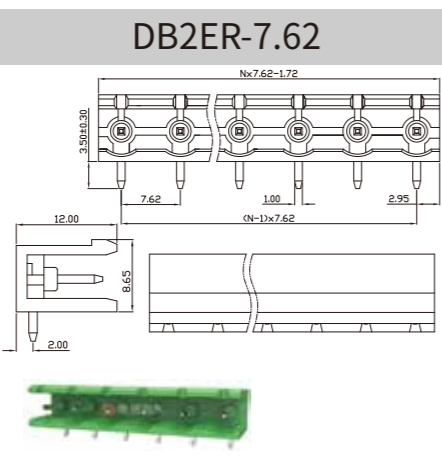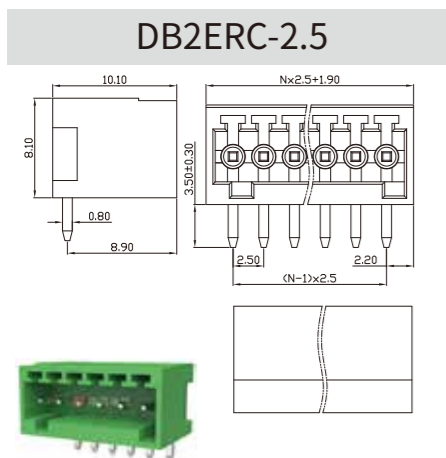

## UL/CUL 技术参数 UL/CUL Technical Data




等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	15	-	10
接线范围 Wire Range	-		
单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

## UL/CUL 技术参数 UL/CUL Technical Data

等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	15	-	10
接线范围 Wire Range	-		
单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	5.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

## UL/CUL 技术参数 UL/CUL Technical Data

等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	-
额定电流 Rated Current [A]	10	-	-
接线范围 Wire Range	-		
单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

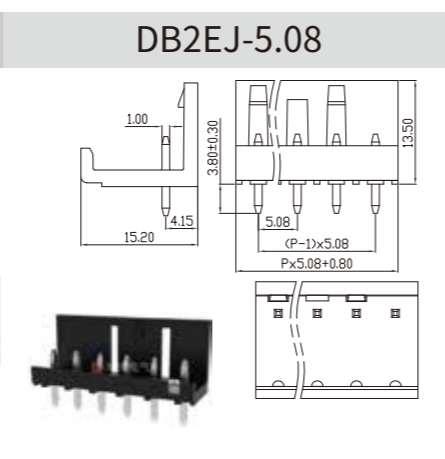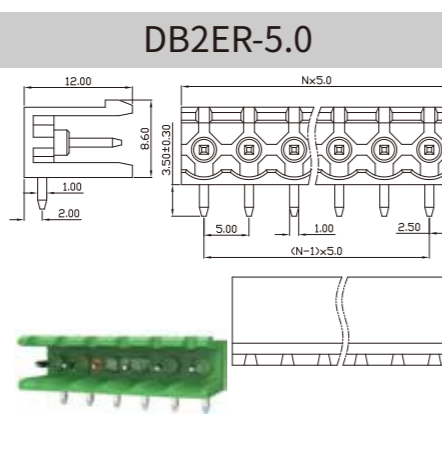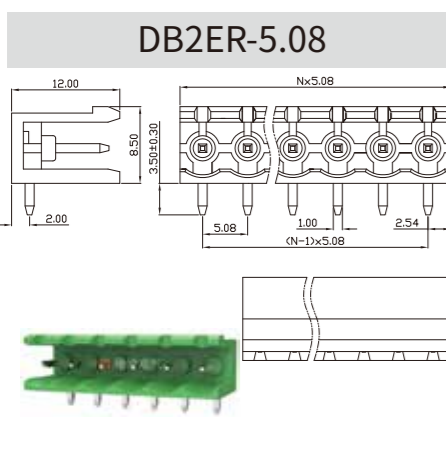

# 插拔式端子台 Plug-In terminal block

## UL/CUL 技术参数 UL/CUL Technical Data




等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	15	-	10
接线范围 Wire Range	-		
单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	7.62		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

## UL/CUL 技术参数 UL/CUL Technical Data

等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	15	-	10
接线范围 Wire Range	-		
单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

## UL/CUL 技术参数 UL/CUL Technical Data

等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	15	-	10
接线范围 Wire Range	-		
单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	5.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

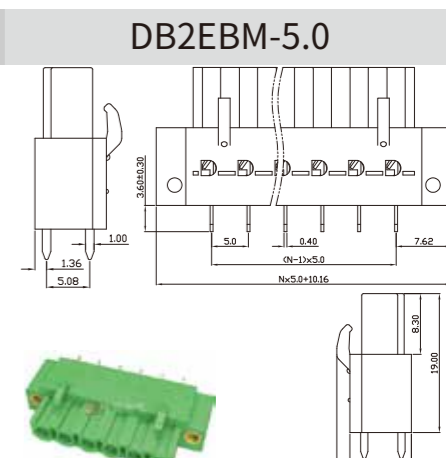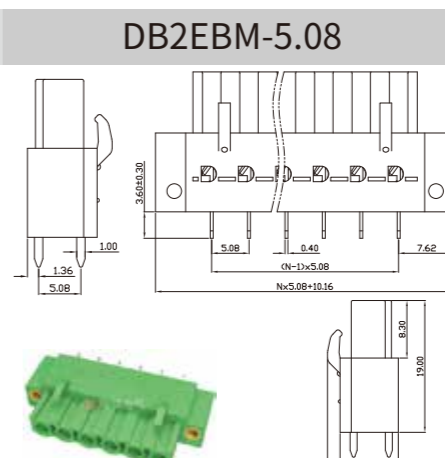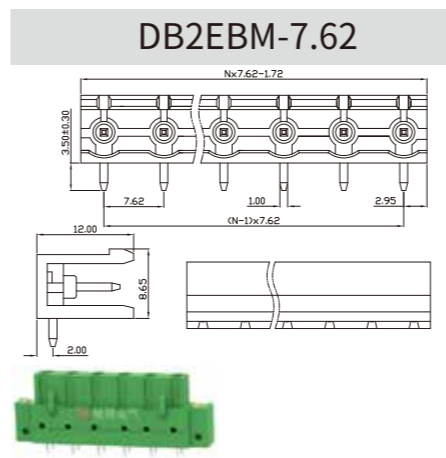

## UL/CUL 技术参数 UL/CUL Technical Data




等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	8	-	8
接线范围 Wire Range	-		
单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	3.81		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

## UL/CUL 技术参数 UL/CUL Technical Data

等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	8	-	8
接线范围 Wire Range	-		
单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	3.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

## UL/CUL 技术参数 UL/CUL Technical Data

等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	15	-	10
接线范围 Wire Range	-		
单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	7.62		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

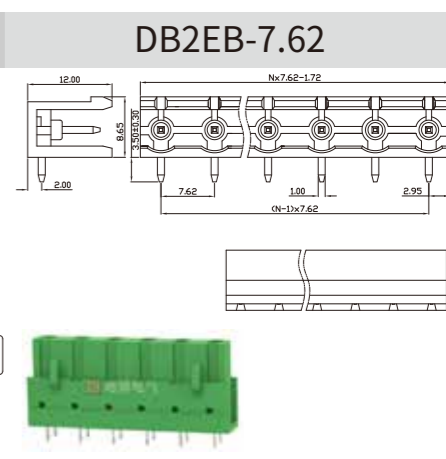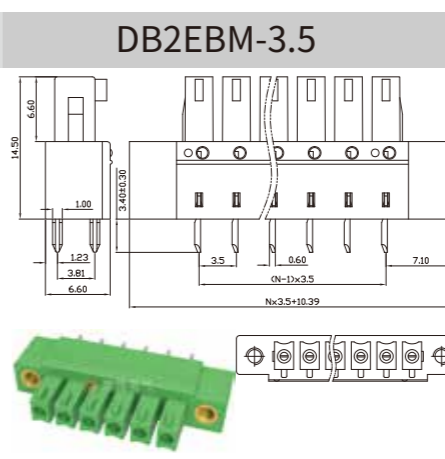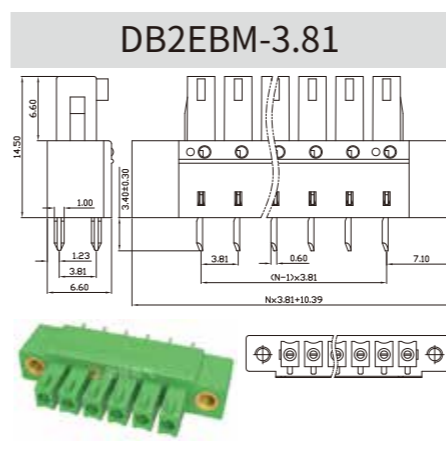

# 插拔式端子台 Plug-In terminal block

UL/CUL 技术参数 UL/CUL Technical Data	CUL US		
--------------------------------------	--------	--	--




等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	15	-	10
接线范围 Wire Range	-		
单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

UL/CUL 技术参数 UL/CUL Technical Data	CUL US		
--------------------------------------	--------	--	--

等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	15	-	10
接线范围 Wire Range	-		
单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	5.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

UL/CUL 技术参数 UL/CUL Technical Data	CUL US		
--------------------------------------	--------	--	--

等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	8	-	8
接线范围 Wire Range	-		
单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	3.81		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

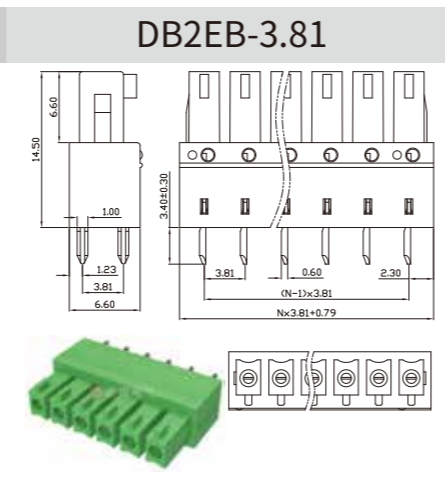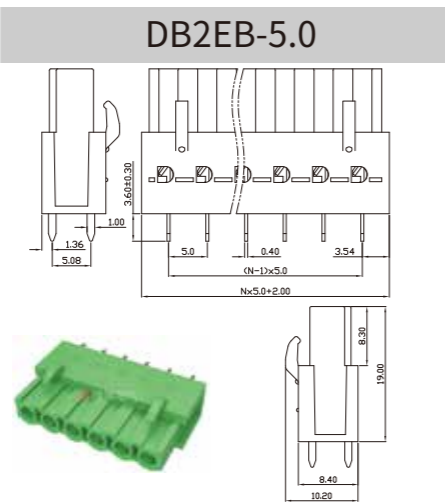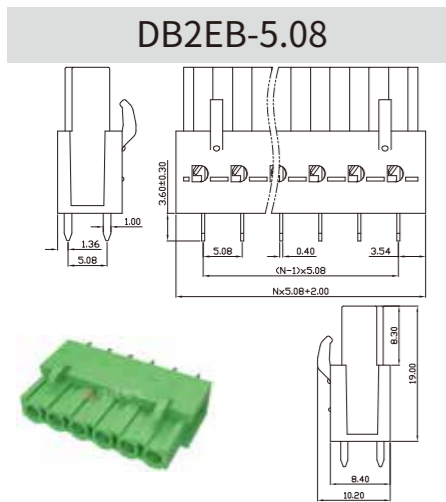

UL/CUL 技术参数 UL/CUL Technical Data	CUL US		
--------------------------------------	--------	--	--




等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	8	-	8
接线范围 Wire Range	-		
单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	3.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

UL/CUL 技术参数 UL/CUL Technical Data	CUL US		
--------------------------------------	--------	--	--

等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	10	-	10
接线范围 Wire Range	-		
单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	7.62		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

UL/CUL 技术参数 UL/CUL Technical Data	CUL US		
--------------------------------------	--------	--	--

等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	15	-	10
接线范围 Wire Range	-		
单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

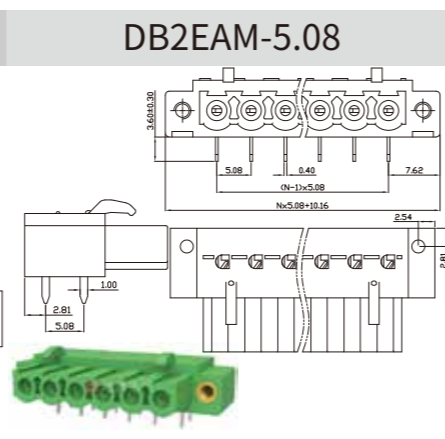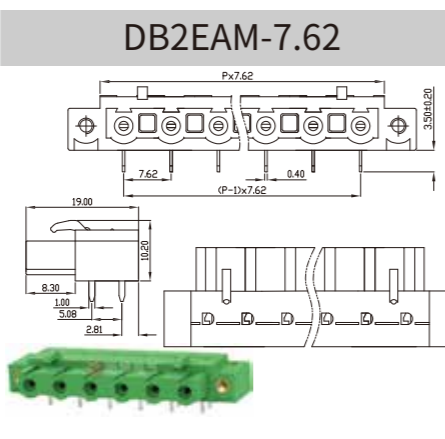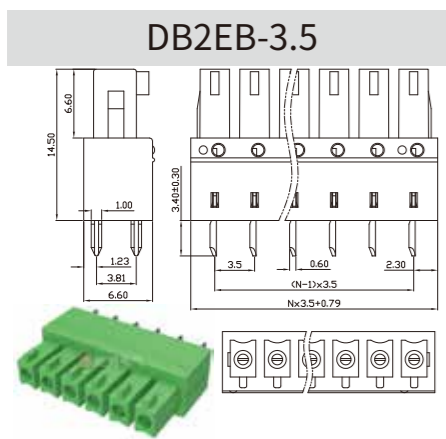

# 插拔式端子台 Plug-In terminal block

UL/CUL 技术参数 UL/CUL Technical Data	CUL US		
--------------------------------------	--------	--	--




等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	15	-	10
接线范围 Wire Range	-		
单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	5.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

UL/CUL 技术参数 UL/CUL Technical Data	CUL US		
--------------------------------------	--------	--	--

等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	8	-	8
接线范围 Wire Range	-		
单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	3.81		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

UL/CUL 技术参数 UL/CUL Technical Data	CUL US		
--------------------------------------	--------	--	--

等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	8	-	8
接线范围 Wire Range	-		
单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	3.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

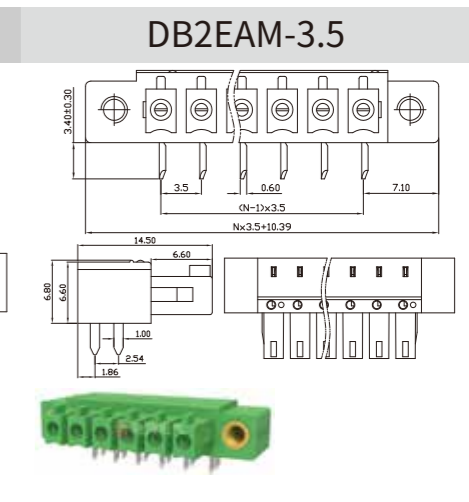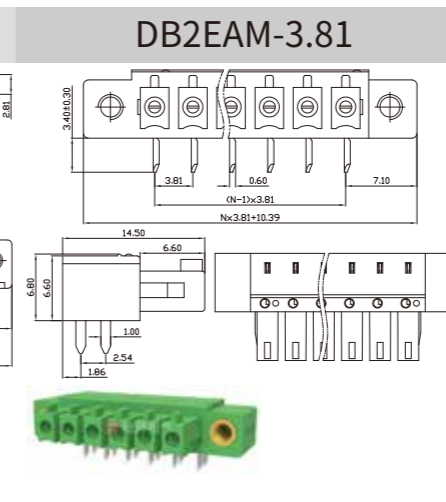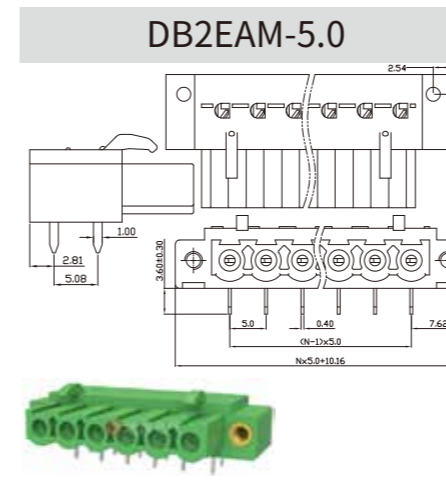

UL/CUL 技术参数 UL/CUL Technical Data	CUL US		
--------------------------------------	--------	--	--




等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	15	-	10
接线范围 Wire Range	-		
单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	7.62		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

UL/CUL 技术参数 UL/CUL Technical Data	CUL US		
--------------------------------------	--------	--	--

等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	15	-	10
接线范围 Wire Range	-		
单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

UL/CUL 技术参数 UL/CUL Technical Data	CUL US		
--------------------------------------	--------	--	--

等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	15	-	10
接线范围 Wire Range	-		
单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	5.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

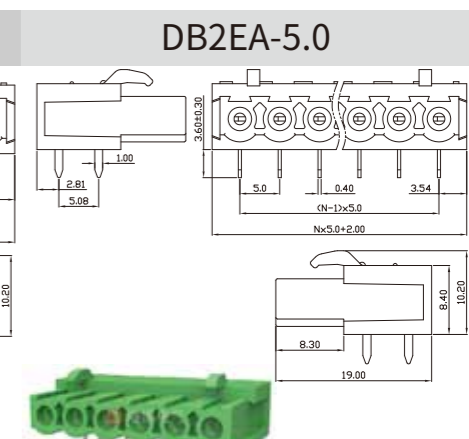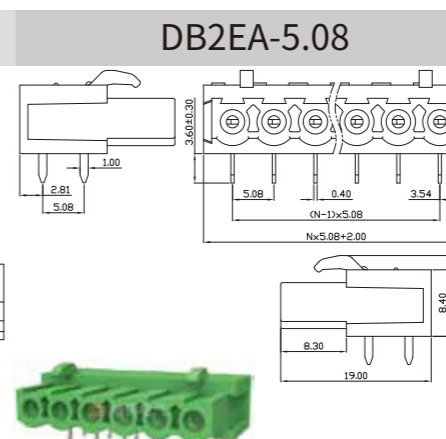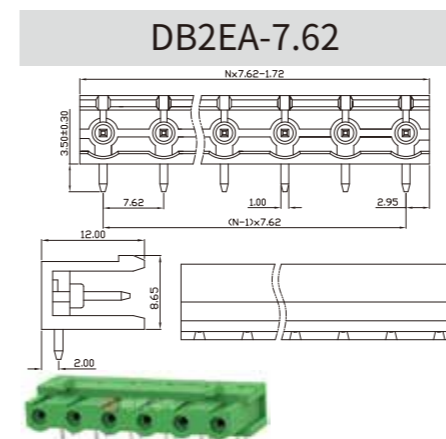


# 插拔式端子台 Plug-In terminal block

UL/CUL 技术参数 UL/CUL Technical Data			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	8	-	8
接线范围 Wire Range	-		
单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	3.81		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

UL/CUL 技术参数 UL/CUL Technical Data			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	8	-	8
接线范围 Wire Range	-		
单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	3.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		


UL/CUL 技术参数 UL/CUL Technical Data			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	8	-	8
接线范围 Wire Range	-		
单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	3.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

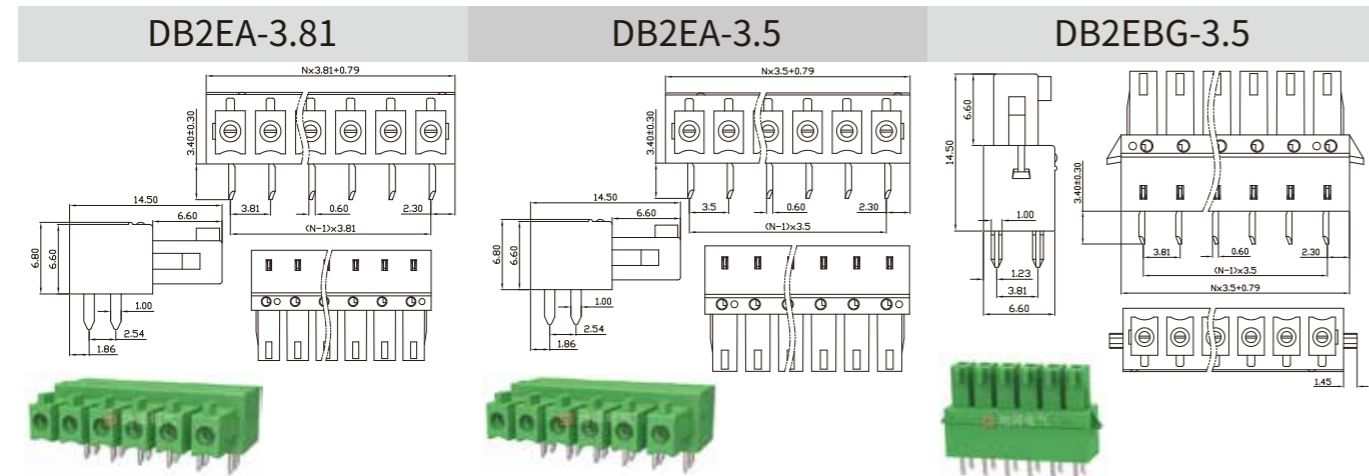

UL/CUL 技术参数 UL/CUL Technical Data			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	8	-	8
接线范围 Wire Range	-		
单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	3.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

UL/CUL 技术参数 UL/CUL Technical Data			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	-
额定电流 Rated Current [A]	30	-	-
接线范围 Wire Range	24-10		
单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	7.62		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.5		

UL/CUL 技术参数 UL/CUL Technical Data			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	15	-	10
接线范围 Wire Range	-		
单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

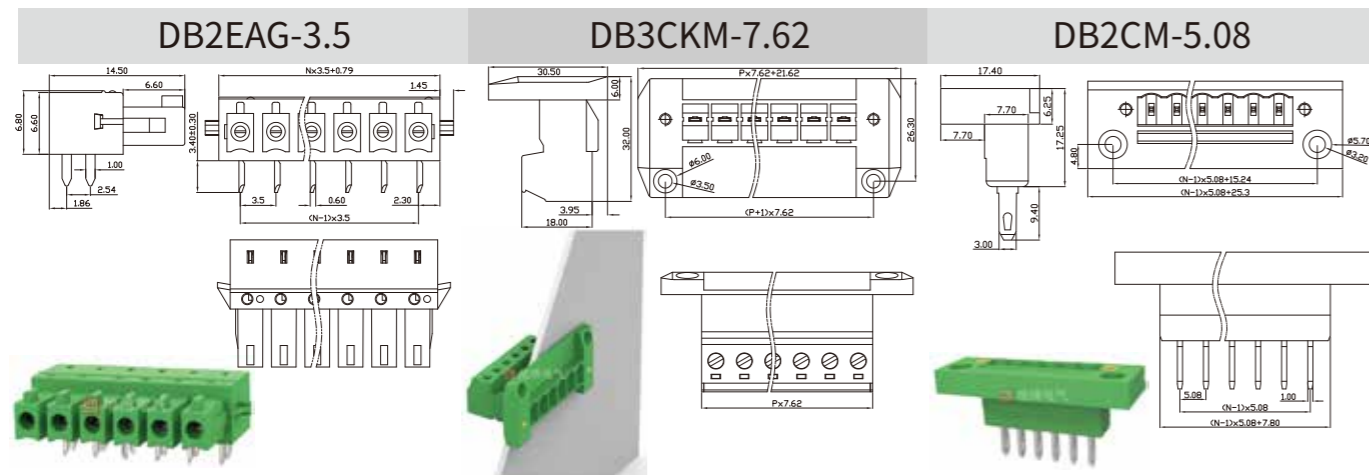


# 插拔式端子台 Plug-In terminal block

UL/CUL 技术参数 UL/CUL Technical Data			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	8	-	8
接线范围 Wire Range	-		
单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	3.81		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

UL/CUL 技术参数 UL/CUL Technical Data			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	15	-	10
接线范围 Wire Range	-		
单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		


UL/CUL 技术参数 UL/CUL Technical Data			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	15	-	10
接线范围 Wire Range	-		
单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

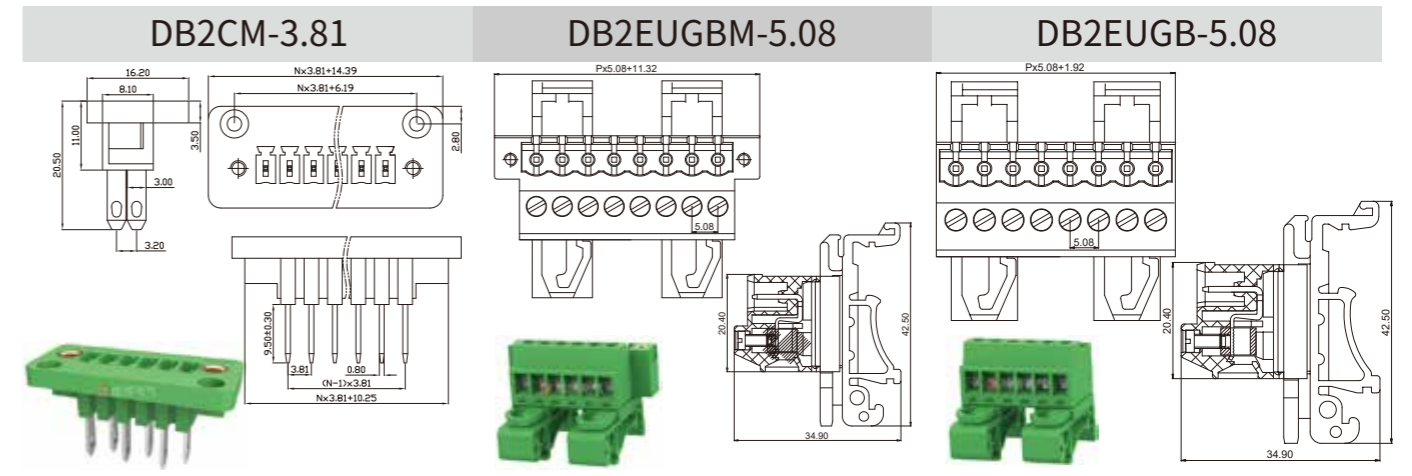

UL/CUL 技术参数 UL/CUL Technical Data			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	8	-	8
接线范围 Wire Range	24-12		
单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M2.5/0.4		

UL/CUL 技术参数 UL/CUL Technical Data			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	15	-	10
接线范围 Wire Range	24-12		
单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M2.5/0.4		

UL/CUL 技术参数 UL/CUL Technical Data			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	8	-	10
接线范围 Wire Range	24-16		
单/多芯线 Solid/Stranded [AWG]	-		
间距 Pitch [mm]	3.81		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M2.0/0.2		

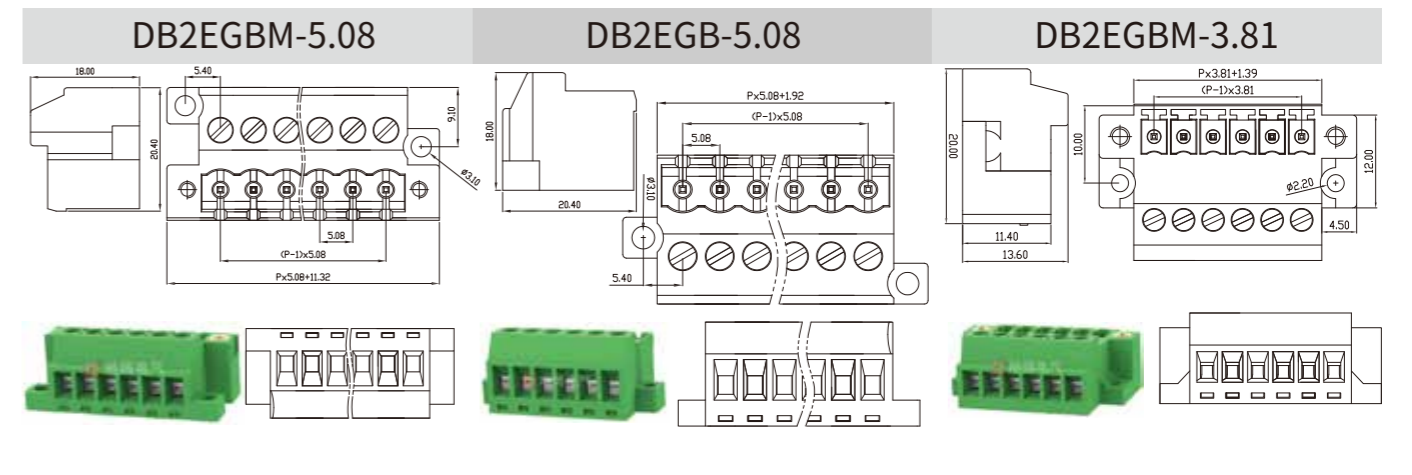


## 插拔式端子台 Plug-In terminal block

UL/CUL 技术参数 UL/CUL Technical Data	C UL US		
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	8	-	10
接线范围 Wire Range	24-16		
单/多芯线 Solid/Stranded [AWG]	24-16		
间距 Pitch [mm]	3.81		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M2/0.2		


UL/CUL 技术参数 UL/CUL Technical Data	C UL US		
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	15	-	10
接线范围 Wire Range	24-12		
单/多芯线 Solid/Stranded [AWG]	24-12		
间距 Pitch [mm]	5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M2.5/0.2		

UL/CUL 技术参数 UL/CUL Technical Data	C UL US		
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	15	-	10
接线范围 Wire Range	24-12		
单/多芯线 Solid/Stranded [AWG]	24-12		
间距 Pitch [mm]	5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M2.5/0.4		


### DB2EGB-3.81

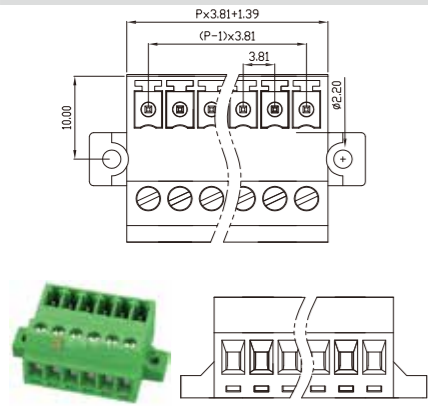


### DB2EVKM-5.08

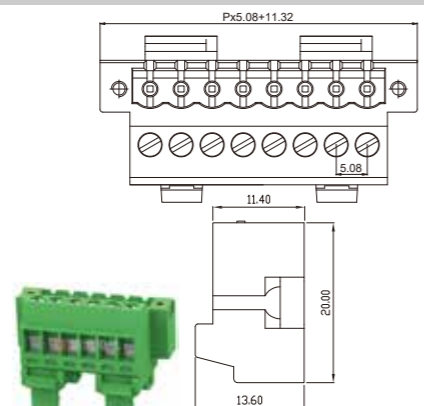


### DB2EVK-5.08

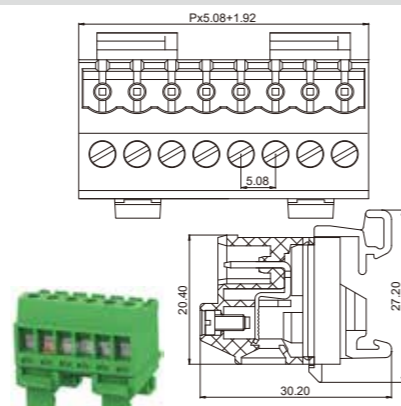


### DB2ERK-5.08

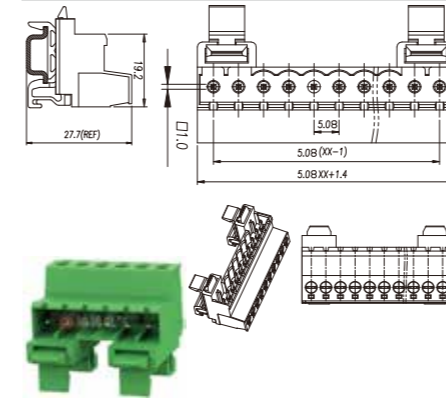

### DB2ERK-5.0

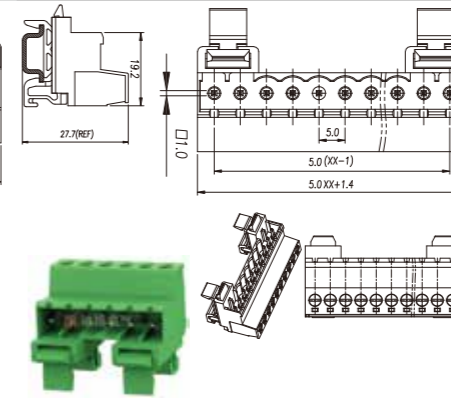

### DB3EKM-10.16

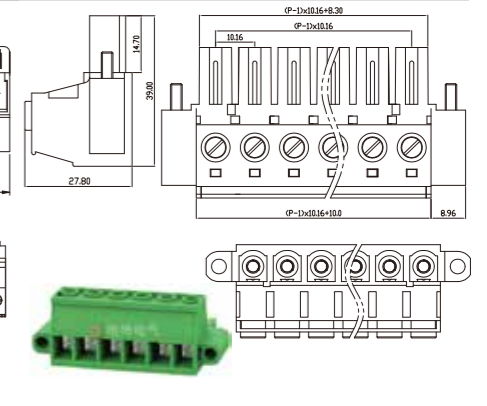


UL/CUL 技术参数 UL/CUL Technical Data	C UL US		
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	15	-	10
接线范围 Wire Range	28-12		
单/多芯线 Solid/Stranded [AWG]	28-12		
间距 Pitch [mm]	5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.5		


UL/CUL 技术参数 UL/CUL Technical Data	C UL US		
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	15	-	10
接线范围 Wire Range	28-12		
单/多芯线 Solid/Stranded [AWG]	28-12		
间距 Pitch [mm]	5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.5		

UL/CUL 技术参数 UL/CUL Technical Data	C UL US		
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	15	-	10
接线范围 Wire Range	28-12		
单/多芯线 Solid/Stranded [AWG]	28-12		
间距 Pitch [mm]	5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.5		


### DB2EURKM-5.08

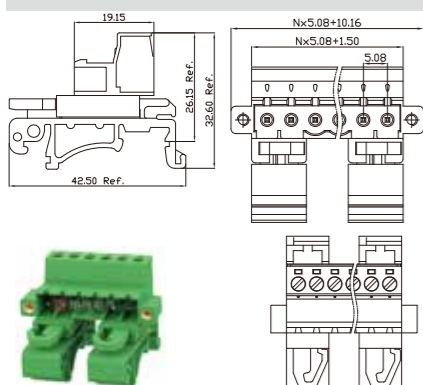


### DB2EURK-5.08

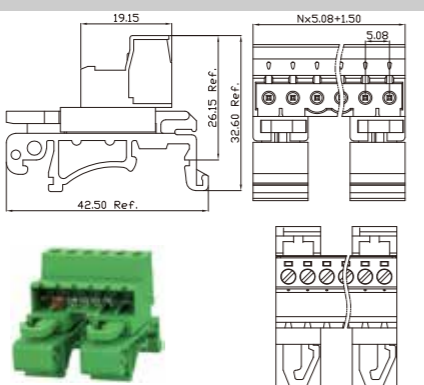


### DB2ERKM-5.08

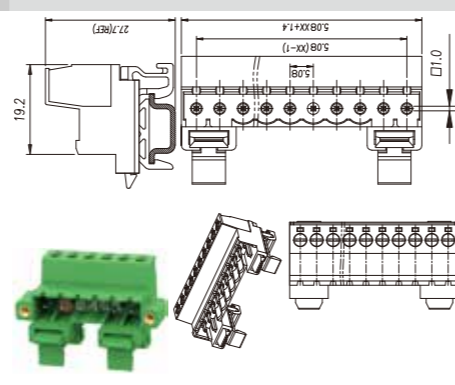


### DB3EK-10.16

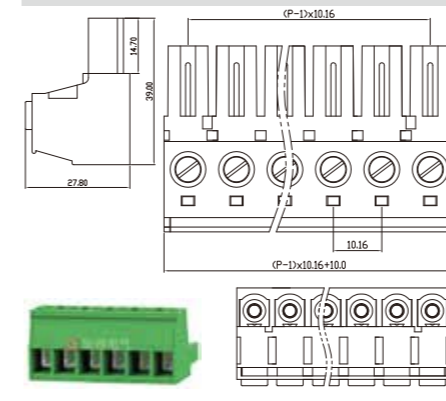

### DB3EKDL-7.62

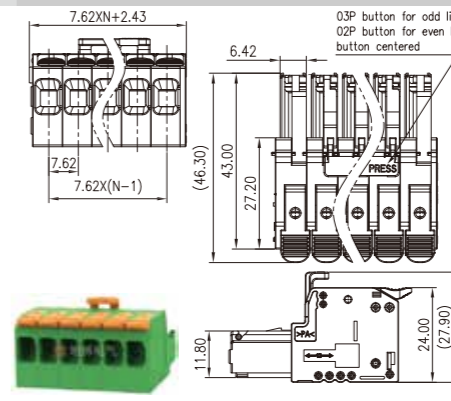

### DB3EKD-7.62

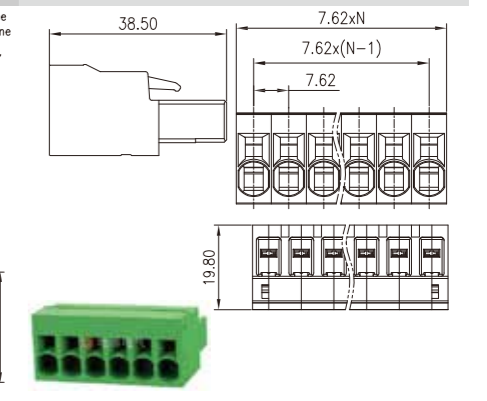

UL/CUL 技术参数 UL/CUL Technical Data	C UL US		
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	15	-	10
接线范围 Wire Range	28-12		
单/多芯线 Solid/Stranded [AWG]	28-12		
间距 Pitch [mm]	5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.5		

UL/CUL 技术参数 UL/CUL Technical Data	C UL US		
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	15	-	10
接线范围 Wire Range	28-12		
单/多芯线 Solid/Stranded [AWG]	28-12		
间距 Pitch [mm]	5.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.5		

UL/CUL 技术参数 UL/CUL Technical Data	C UL US		
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	600	600	300
额定电流 Rated Current [A]	65	65	5
接线范围 Wire Range	20-6		
单/多芯线 Solid/Stranded [AWG]	20-6		
间距 Pitch [mm]	10.16		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M4/1.2		

UL/CUL 技术参数 UL/CUL Technical Data	C UL US		
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	600	600	300
额定电流 Rated Current [A]	65	65	5
接线范围 Wire Range	20-6		
单/多芯线 Solid/Stranded [AWG]	20-6		
间距 Pitch [mm]	10.16		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M4/1.2		

UL/CUL 技术参数 UL/CUL Technical Data	C UL US		
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	600	600	-
额定电流 Rated Current [A]	42	42	-
接线范围 Wire Range	20-8		
单/多芯线 Solid/Stranded [AWG]	20-8		
间距 Pitch [mm]	7.62		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		




UL/CUL 技术参数 UL/CUL Technical Data	C UL US		
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	600	-	-
额定电流 Rated Current [A]	35	-	-
接线范围 Wire Range	24-8		
单/多芯线 Solid/Stranded [AWG]	24-8		
间距 Pitch [mm]	7.62		
螺丝 Screw/扭矩 Torque(Max) [N.m]	-		

# 插拔式端子台 Plug-In terminal block

UL/CUL 技术参数 UL/CUL Technical Data		C <sub>RU</sub> US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		600	600	300
额定电流 Rated Current [A]		41	41	5
接线范围 Wire Range		24-8		
单/多芯线 Solid/Stranded [AWG]		24-8		
间距 Pitch [mm]		7.62		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M3/0.5		

UL/CUL 技术参数 UL/CUL Technical Data		C <sub>RU</sub> US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		600	600	300
额定电流 Rated Current [A]		41	41	5
接线范围 Wire Range		24-8		
单/多芯线 Solid/Stranded [AWG]		24-8		
间距 Pitch [mm]		7.62		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M3/0.5		




UL/CUL 技术参数 UL/CUL Technical Data		C <sub>RU</sub> US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		30	-	10
接线范围 Wire Range		24-8		
单/多芯线 Solid/Stranded [AWG]		24-8		
间距 Pitch [mm]		7.62		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M3/0.5		

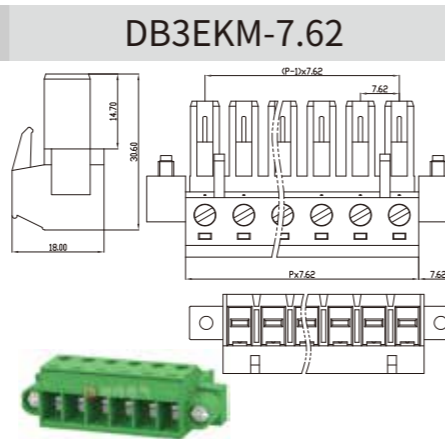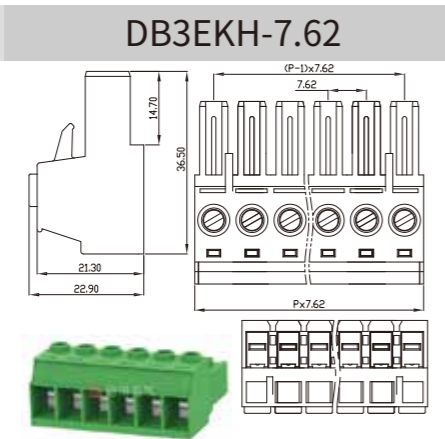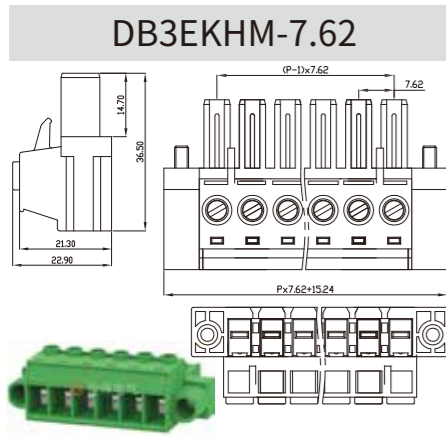

UL/CUL 技术参数 UL/CUL Technical Data		C <sub>RU</sub> US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		30	-	10
接线范围 Wire Range		24-8		
单/多芯线 Solid/Stranded [AWG]		24-8		
间距 Pitch [mm]		7.62		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M3/0.5		

UL/CUL 技术参数 UL/CUL Technical Data		C <sub>RU</sub> US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		15	-	10
接线范围 Wire Range		28-12		
单/多芯线 Solid/Stranded [AWG]		28-12		
间距 Pitch [mm]		7.62		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M3/0.5		

UL/CUL 技术参数 UL/CUL Technical Data		C <sub>RU</sub> US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		15	-	10
接线范围 Wire Range		28-12		
单/多芯线 Solid/Stranded [AWG]		28-12		
间距 Pitch [mm]		7.62		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M3/0.5		

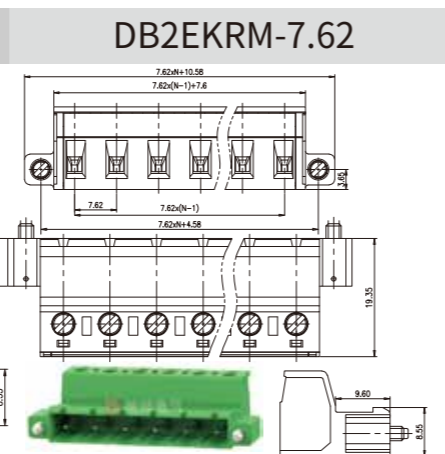
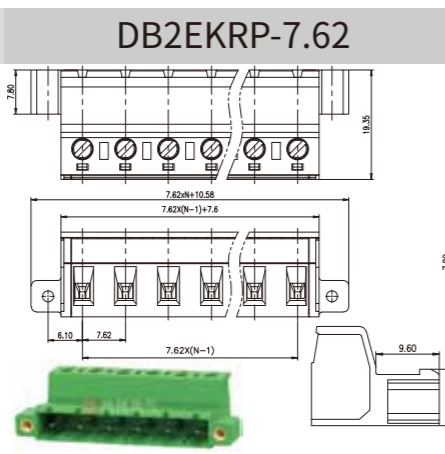
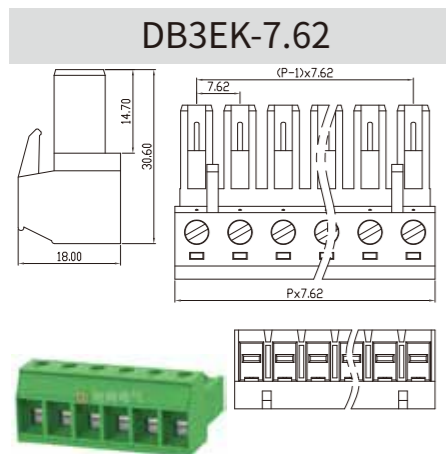


# 插拔式端子台 Plug-In terminal block

UL/CUL 技术参数 UL/CUL Technical Data		C <sub>RU</sub> US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		15	-	10
接线范围 Wire Range		28-12		
单/多芯线 Solid/Stranded [AWG]		28-12		
间距 Pitch [mm]		7.62		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M3/0.5		

UL/CUL 技术参数 UL/CUL Technical Data		C <sub>RU</sub> US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		15	-	10
接线范围 Wire Range		28-12		
单/多芯线 Solid/Stranded [AWG]		28-12		
间距 Pitch [mm]		5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M3/0.5		




UL/CUL 技术参数 UL/CUL Technical Data		C <sub>RU</sub> US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		15	-	10
接线范围 Wire Range		28-12		
单/多芯线 Solid/Stranded [AWG]		28-12		
间距 Pitch [mm]		5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M3/0.5		

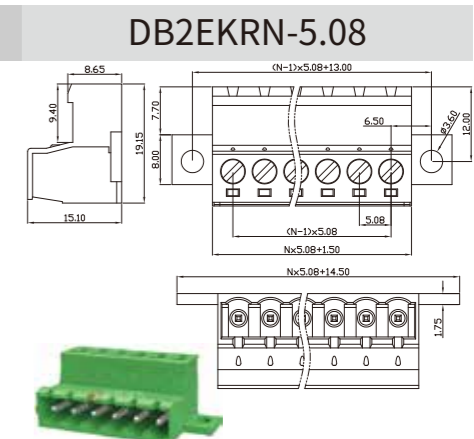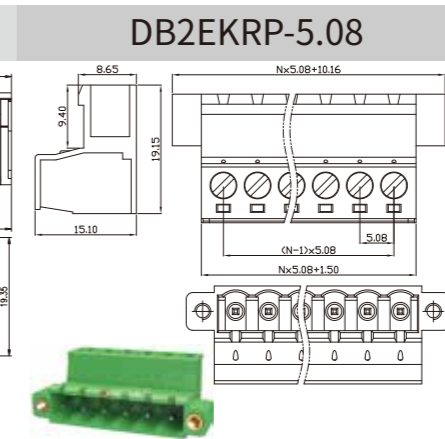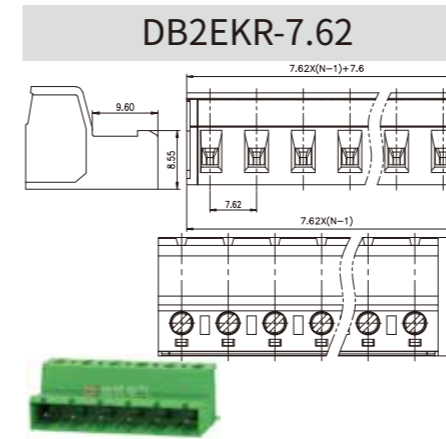

UL/CUL 技术参数 UL/CUL Technical Data		C <sub>RU</sub> US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		10	-	10
接线范围 Wire Range		28-12		
单/多芯线 Solid/Stranded [AWG]		28-12		
间距 Pitch [mm]		5.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M3/0.4		

UL/CUL 技术参数 UL/CUL Technical Data		C <sub>RU</sub> US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		10	-	10
接线范围 Wire Range		28-12		
单/多芯线 Solid/Stranded [AWG]		28-12		
间距 Pitch [mm]		5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M3/0.5		

UL/CUL 技术参数 UL/CUL Technical Data		C <sub>RU</sub> US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		-	-	-
额定电流 Rated Current [A]		-	-	-
接线范围 Wire Range		-		
单/多芯线 Solid/Stranded [AWG]		-		
间距 Pitch [mm]		5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]		-		

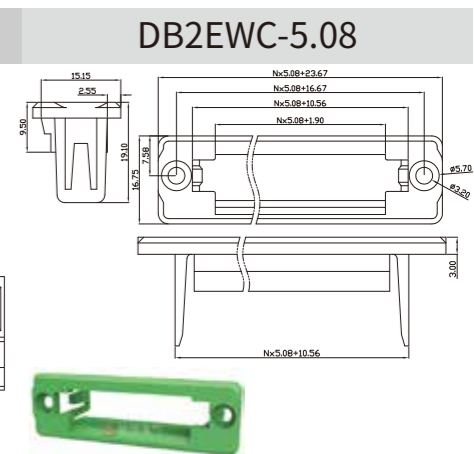
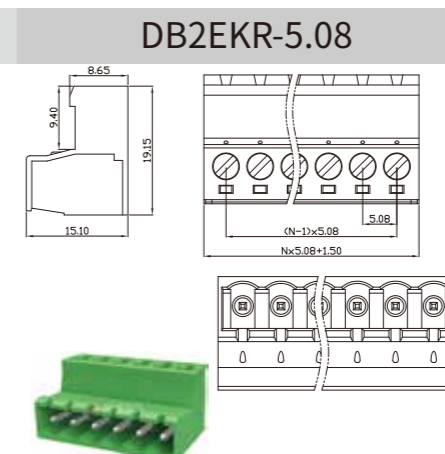
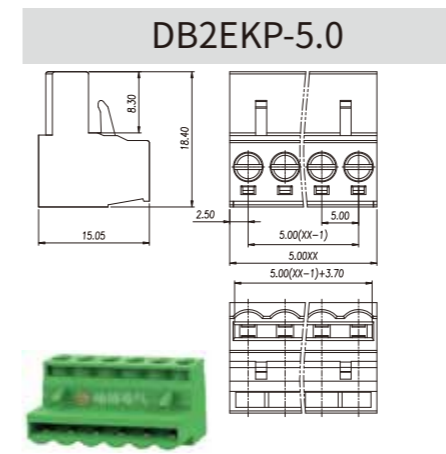


# 插拔式端子台 Plug-In terminal block

UL/CUL 技术参数 UL/CUL Technical Data		C UL US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		8	-	8
接线范围 Wire Range		28-12		
单/多芯线 Solid/Stranded [AWG]				
间距 Pitch [mm]		3.81		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M2/0.2		

UL/CUL 技术参数 UL/CUL Technical Data		C UL US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		8	-	8
接线范围 Wire Range		28-16		
单/多芯线 Solid/Stranded [AWG]				
间距 Pitch [mm]		3.81		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M2/0.2		




UL/CUL 技术参数 UL/CUL Technical Data		C UL US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		8	-	8
接线范围 Wire Range		28-16		
单/多芯线 Solid/Stranded [AWG]				
间距 Pitch [mm]		3.81		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M2/0.2		

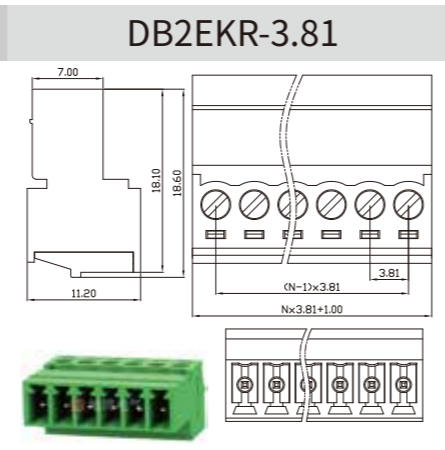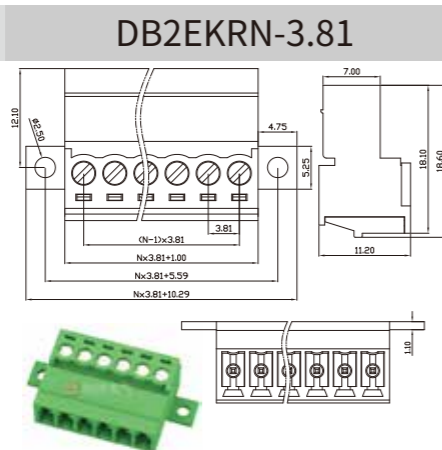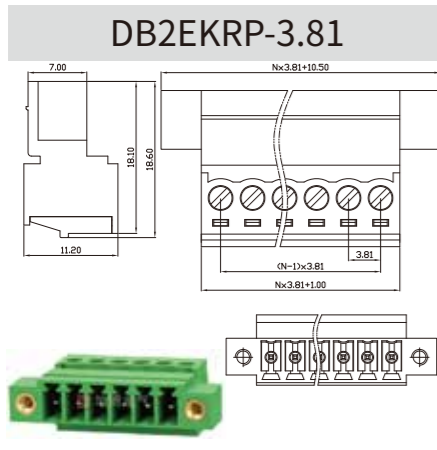

UL/CUL 技术参数 UL/CUL Technical Data		C UL US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		-	-	-
额定电流 Rated Current [A]		-	-	-
接线范围 Wire Range		-		
单/多芯线 Solid/Stranded [AWG]				
间距 Pitch [mm]		3.81		
螺丝 Screw/扭矩 Torque(Max) [N.m]		-		

UL/CUL 技术参数 UL/CUL Technical Data		C UL US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		150	-	150
额定电流 Rated Current [A]		8	-	8
接线范围 Wire Range		24-16		
单/多芯线 Solid/Stranded [AWG]				
间距 Pitch [mm]		3.81		
螺丝 Screw/扭矩 Torque(Max) [N.m]		-		

UL/CUL 技术参数 UL/CUL Technical Data		C UL US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		8	-	8
接线范围 Wire Range		24-16		
单/多芯线 Solid/Stranded [AWG]				
间距 Pitch [mm]		3.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]		-		

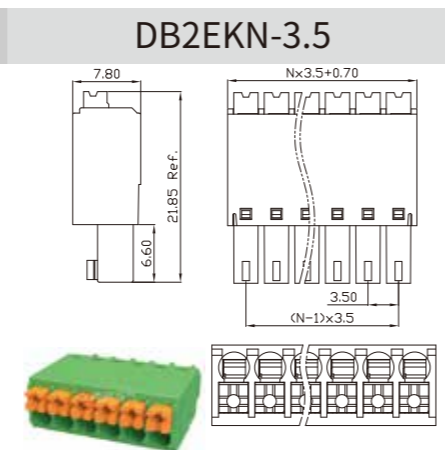
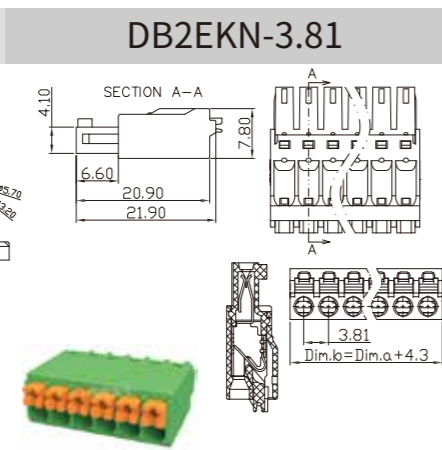
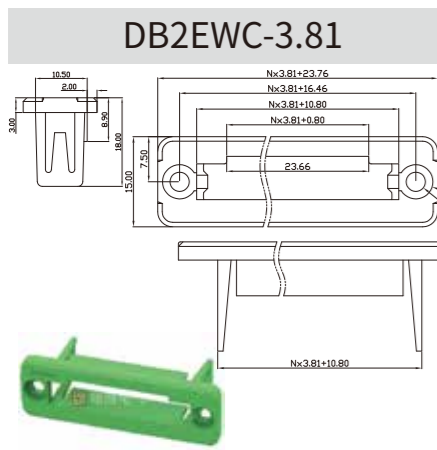


# 插拔式端子台 Plug-In terminal block

UL/CUL 技术参数 UL/CUL Technical Data		C UL US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		8	-	10
接线范围 Wire Range		28-16		
单/多芯线 Solid/Stranded [AWG]				
间距 Pitch [mm]		3.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]		-		

UL/CUL 技术参数 UL/CUL Technical Data		C UL US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		8	-	10
接线范围 Wire Range		28-16		
单/多芯线 Solid/Stranded [AWG]				
间距 Pitch [mm]		3.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]		-		




UL/CUL 技术参数 UL/CUL Technical Data		C UL US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		8	-	10
接线范围 Wire Range		28-16		
单/多芯线 Solid/Stranded [AWG]				
间距 Pitch [mm]		3.81		
螺丝 Screw/扭矩 Torque(Max) [N.m]		-		

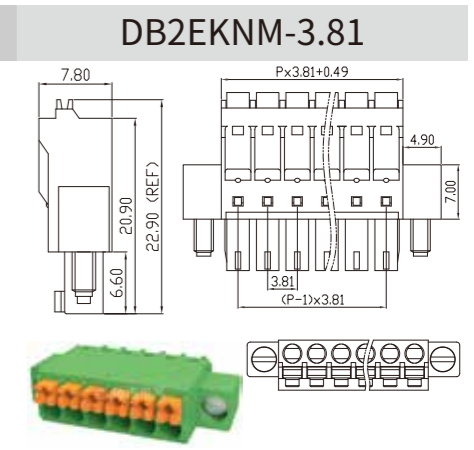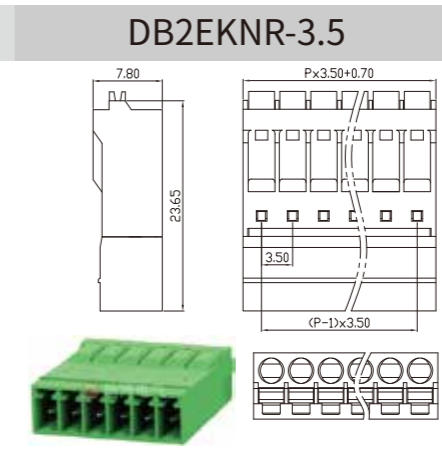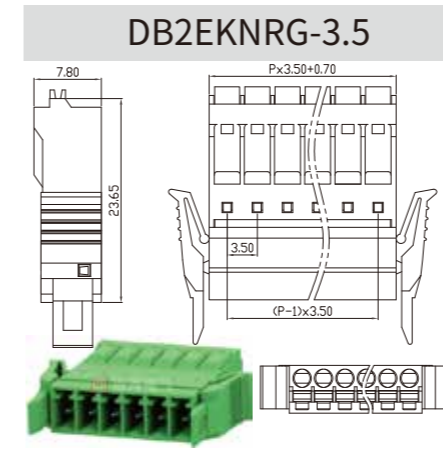

UL/CUL 技术参数 UL/CUL Technical Data		C UL US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		150	-	150
额定电流 Rated Current [A]		8	-	8
接线范围 Wire Range		24-16		
单/多芯线 Solid/Stranded [AWG]				
间距 Pitch [mm]		3.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]		-		

UL/CUL 技术参数 UL/CUL Technical Data		C UL US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		8	-	8
接线范围 Wire Range		24-16		
单/多芯线 Solid/Stranded [AWG]				
间距 Pitch [mm]		3.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]		-		

UL/CUL 技术参数 UL/CUL Technical Data		C UL US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		8	-	8
接线范围 Wire Range		28-16		
单/多芯线 Solid/Stranded [AWG]				
间距 Pitch [mm]		3.81		
螺丝 Screw/扭矩 Torque(Max) [N.m]		-		

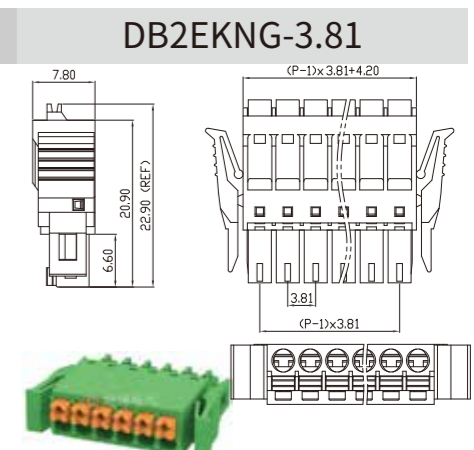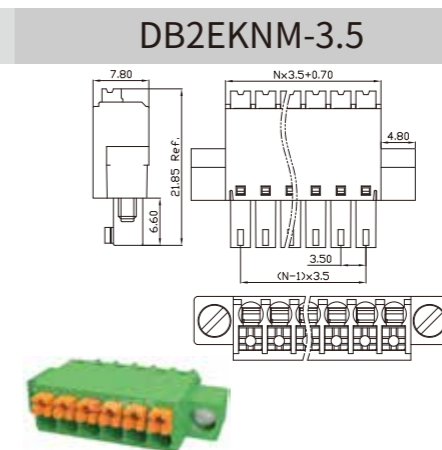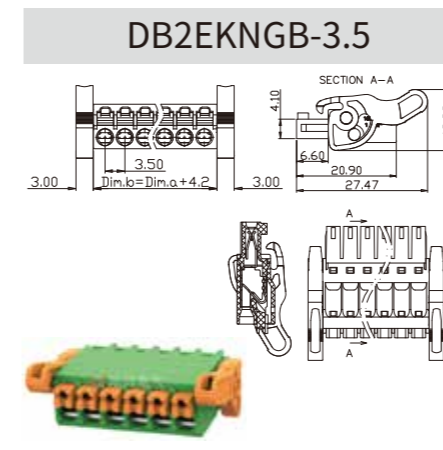






# 插拔式端子台 Plug-In terminal block

UL/CUL 技术参数 UL/CUL Technical Data		C <sub>RU</sub> US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		8	-	8
接线范围 Wire Range		28-16		
单/多芯线 Solid/Stranded [AWG]		28-16		
间距 Pitch [mm]		3.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]		-		

UL/CUL 技术参数 UL/CUL Technical Data		C <sub>RU</sub> US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	50	300
额定电流 Rated Current [A]		10	10	10
接线范围 Wire Range		28-16		
单/多芯线 Solid/Stranded [AWG]		28-16		
间距 Pitch [mm]		3.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]		-		




UL/CUL 技术参数 UL/CUL Technical Data		C <sub>RU</sub> US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	50	300
额定电流 Rated Current [A]		10	10	10
接线范围 Wire Range		28-16		
单/多芯线 Solid/Stranded [AWG]		28-16		
间距 Pitch [mm]		3.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]		-		

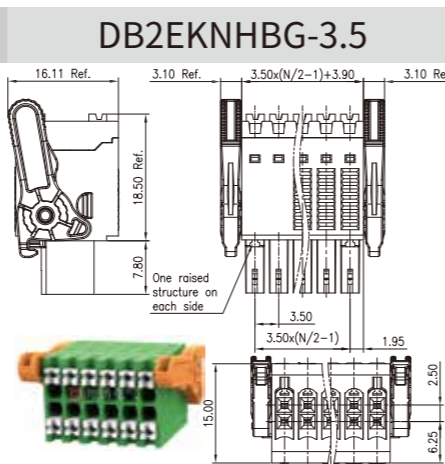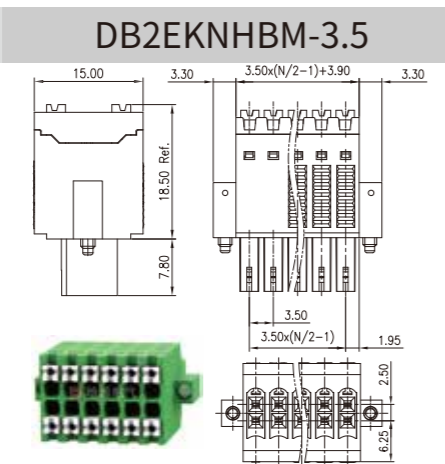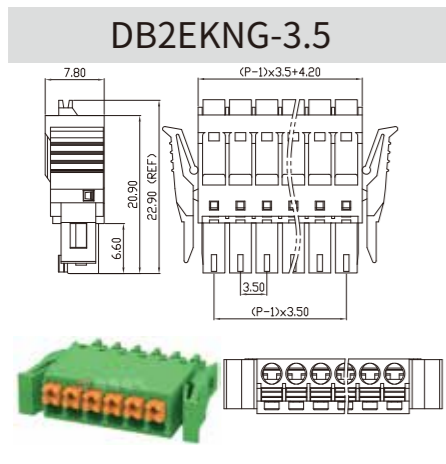

UL/CUL 技术参数 UL/CUL Technical Data		C <sub>RU</sub> US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	50	300
额定电流 Rated Current [A]		10	10	10
接线范围 Wire Range		28-16		
单/多芯线 Solid/Stranded [AWG]		28-16		
间距 Pitch [mm]		3.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]		-		

UL/CUL 技术参数 UL/CUL Technical Data		C <sub>RU</sub> US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	50	-
额定电流 Rated Current [A]		8	8	-
接线范围 Wire Range		26-16		
单/多芯线 Solid/Stranded [AWG]		26-16		
间距 Pitch [mm]		3.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]		-		

UL/CUL 技术参数 UL/CUL Technical Data		C <sub>RU</sub> US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	50	-
额定电流 Rated Current [A]		8	8	-
接线范围 Wire Range		26-12		
单/多芯线 Solid/Stranded [AWG]		26-12		
间距 Pitch [mm]		3.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]		-		

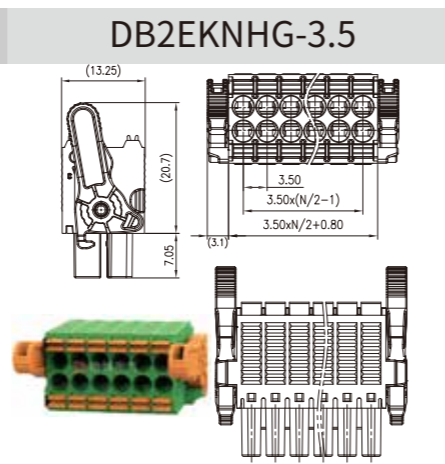
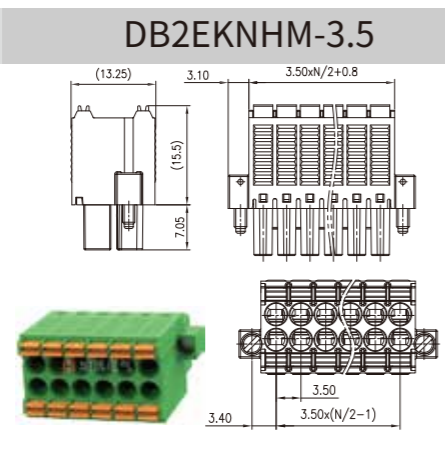
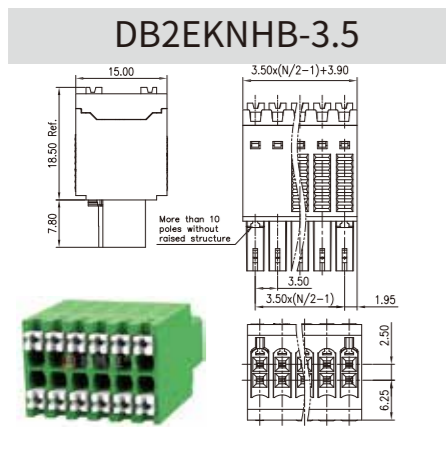


# 插拔式端子台 Plug-In terminal block

UL/CUL 技术参数 UL/CUL Technical Data		C <sub>RU</sub> US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	50	-
额定电流 Rated Current [A]		8	8	-
接线范围 Wire Range		26-16		
单/多芯线 Solid/Stranded [AWG]		26-16		
间距 Pitch [mm]		3.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]		-		

UL/CUL 技术参数 UL/CUL Technical Data		C <sub>RU</sub> US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		8	-	10
接线范围 Wire Range		28-16		
单/多芯线 Solid/Stranded [AWG]		28-16		
间距 Pitch [mm]		3.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]		-		




UL/CUL 技术参数 UL/CUL Technical Data		C <sub>RU</sub> US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		8	-	10
接线范围 Wire Range		28-16		
单/多芯线 Solid/Stranded [AWG]		28-16		
间距 Pitch [mm]		3.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]		-		

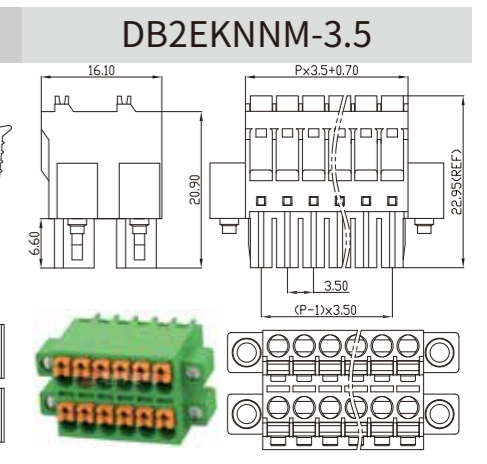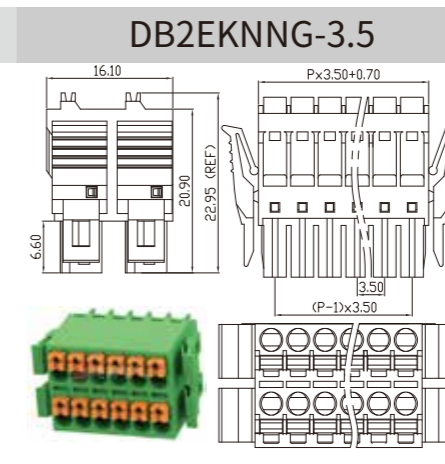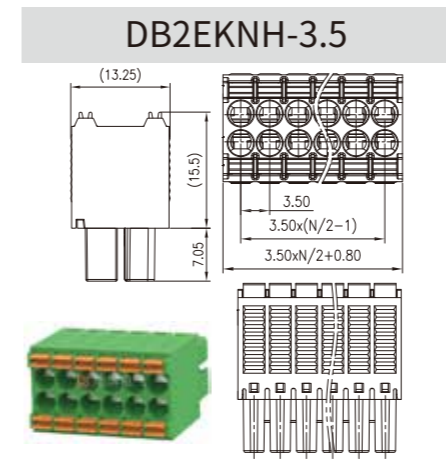

UL/CUL 技术参数 UL/CUL Technical Data		C <sub>RU</sub> US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		8	-	10
接线范围 Wire Range		28-16		
单/多芯线 Solid/Stranded [AWG]		28-16		
间距 Pitch [mm]		3.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]		-		

UL/CUL 技术参数 UL/CUL Technical Data		C <sub>RU</sub> US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		15	-	10
接线范围 Wire Range		28-12		
单/多芯线 Solid/Stranded [AWG]		28-12		
间距 Pitch [mm]		5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M3/0.5		

UL/CUL 技术参数 UL/CUL Technical Data		C <sub>RU</sub> US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		15	-	10
接线范围 Wire Range		28-12		
单/多芯线 Solid/Stranded [AWG]		28-12		
间距 Pitch [mm]		5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M3/0.5		

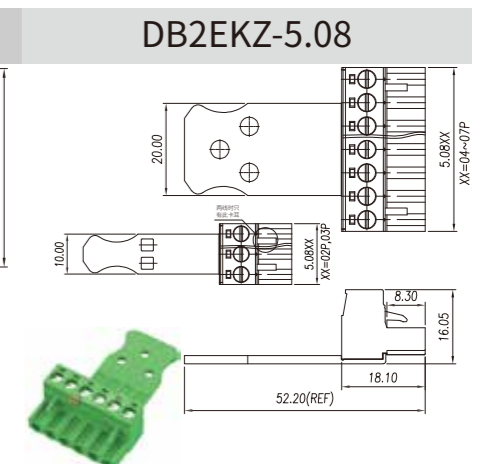
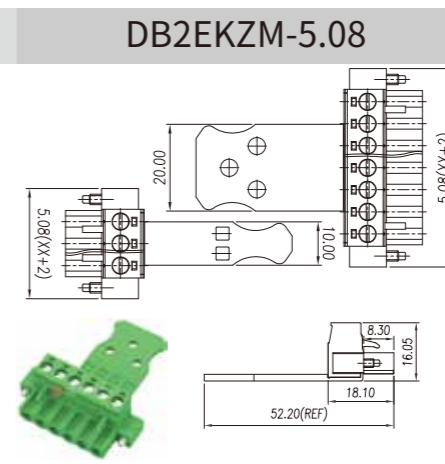
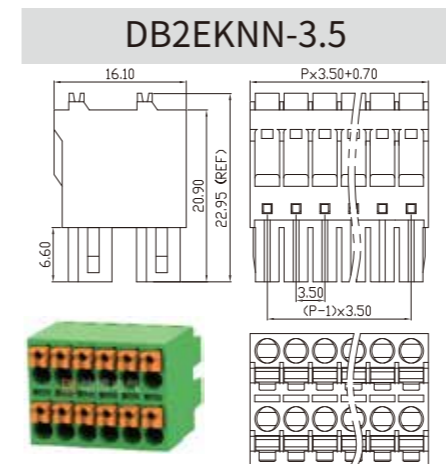


# 插拔式端子台 Plug-In terminal block

UL/CUL 技术参数 UL/CUL Technical Data		C UL US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		10	-	10
接线范围 Wire Range		26-12		
单/多芯线 Solid/Stranded [AWG]		26-12		
间距 Pitch [mm]		5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M2.5/0.4		

UL/CUL 技术参数 UL/CUL Technical Data		C UL US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		10	-	10
接线范围 Wire Range		26-12		
单/多芯线 Solid/Stranded [AWG]		26-12		
间距 Pitch [mm]		5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M2.5/0.4		




UL/CUL 技术参数 UL/CUL Technical Data		C UL US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		10	-	10
接线范围 Wire Range		24-12		
单/多芯线 Solid/Stranded [AWG]		24-12		
间距 Pitch [mm]		5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M2.5/0.4		

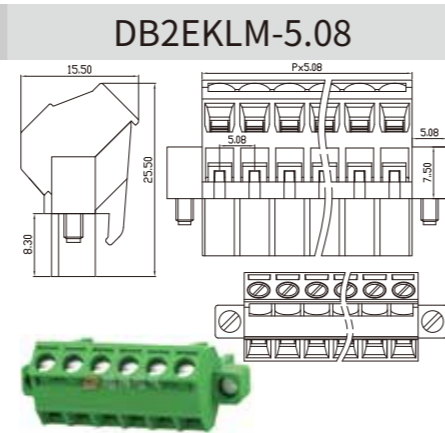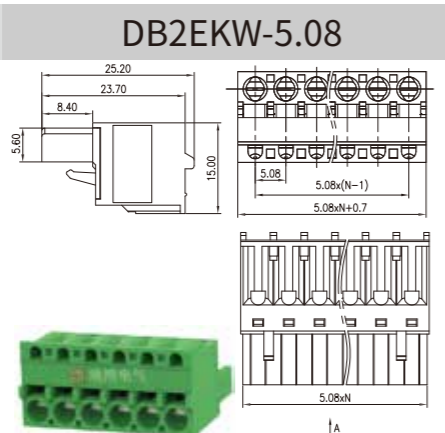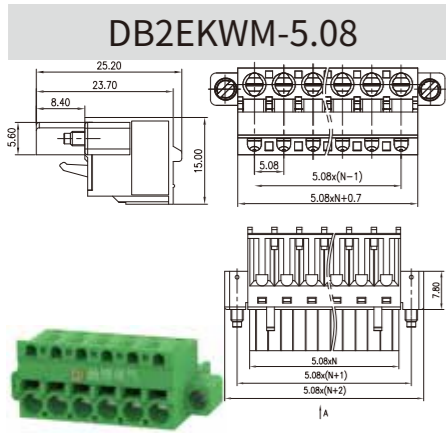

UL/CUL 技术参数 UL/CUL Technical Data		C UL US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		10	-	12
接线范围 Wire Range		24-12		
单/多芯线 Solid/Stranded [AWG]		24-12		
间距 Pitch [mm]		5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M2.5/0.4		

UL/CUL 技术参数 UL/CUL Technical Data		C UL US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		18	-	12
接线范围 Wire Range		30-12		
单/多芯线 Solid/Stranded [AWG]		30-12		
间距 Pitch [mm]		5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M3/0.6		

UL/CUL 技术参数 UL/CUL Technical Data		C UL US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		10	-	10
接线范围 Wire Range		24-12		
单/多芯线 Solid/Stranded [AWG]		24-12		
间距 Pitch [mm]		5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M2.5/0.4		

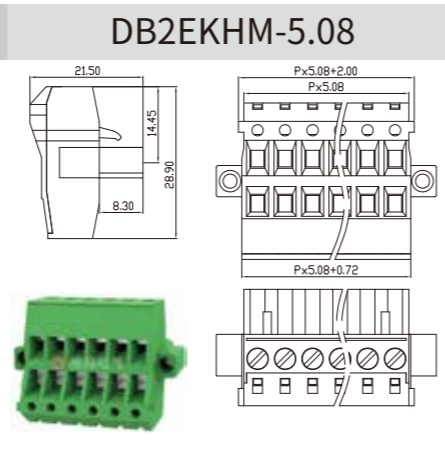
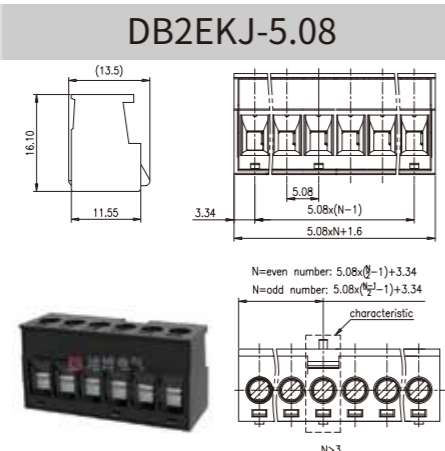
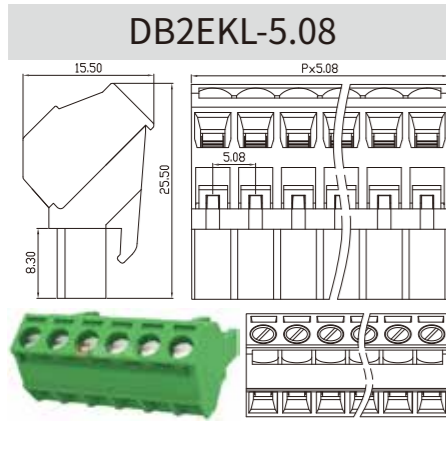


# 插拔式端子台 Plug-In terminal block

UL/CUL 技术参数 UL/CUL Technical Data		C UL US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		10	-	10
接线范围 Wire Range		24-12		
单/多芯线 Solid/Stranded [AWG]		24-12		
间距 Pitch [mm]		5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M2.5/0.4		

UL/CUL 技术参数 UL/CUL Technical Data		C UL US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		10	-	10
接线范围 Wire Range		24-12		
单/多芯线 Solid/Stranded [AWG]		24-12		
间距 Pitch [mm]		5.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M2.5/0.4		




UL/CUL 技术参数 UL/CUL Technical Data		C UL US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		15	-	10
接线范围 Wire Range		28-12		
单/多芯线 Solid/Stranded [AWG]		28-12		
间距 Pitch [mm]		7.62		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M3/0.5		

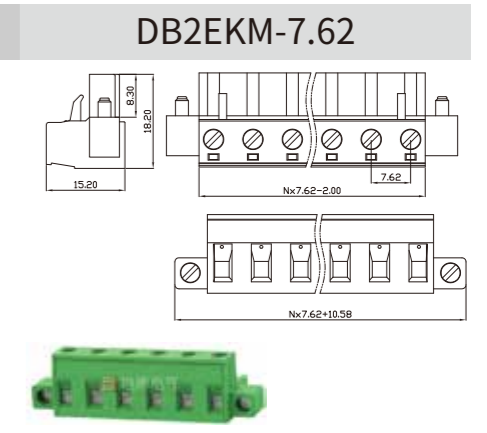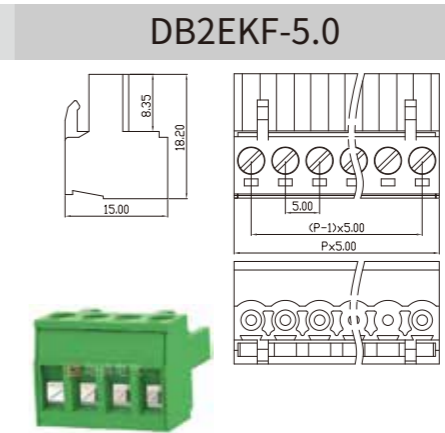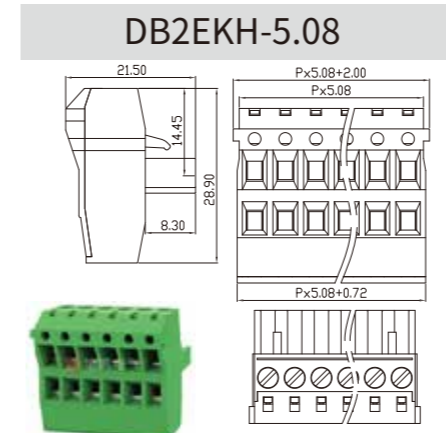

UL/CUL 技术参数 UL/CUL Technical Data		C UL US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		15	-	10
接线范围 Wire Range		28-12		
单/多芯线 Solid/Stranded [AWG]		28-12		
间距 Pitch [mm]		7.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M3/0.5		

UL/CUL 技术参数 UL/CUL Technical Data		C UL US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		15	-	10
接线范围 Wire Range		28-12		
单/多芯线 Solid/Stranded [AWG]		28-12		
间距 Pitch [mm]		10.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M3/0.5		

UL/CUL 技术参数 UL/CUL Technical Data		C UL US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		15	-	10
接线范围 Wire Range		28-12		
单/多芯线 Solid/Stranded [AWG]		28-12		
间距 Pitch [mm]		10.16		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M3/0.5		

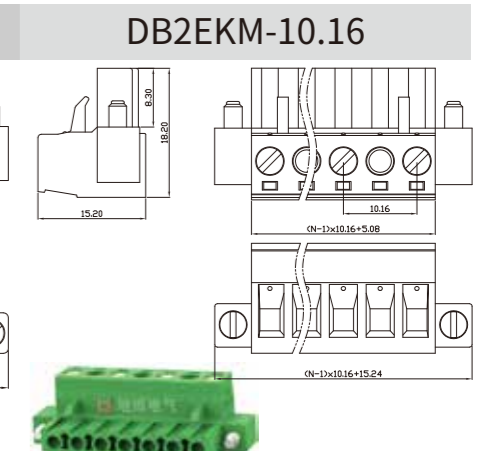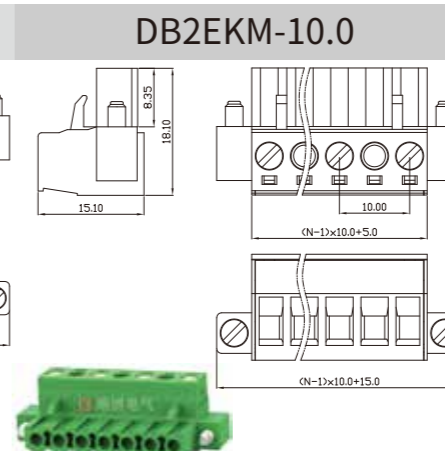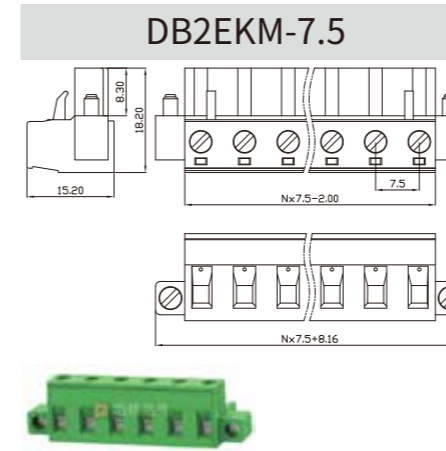


# 插拔式端子台 Plug-In terminal block

UL/CUL 技术参数 UL/CUL Technical Data		C UL US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		15	-	10
接线范围 Wire Range		28-12		
单/多芯线 Solid/Stranded [AWG]		28-12		
间距 Pitch [mm]		10.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M3/0.5		


UL/CUL 技术参数 UL/CUL Technical Data		C UL US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		15	-	10
接线范围 Wire Range		28-12		
单/多芯线 Solid/Stranded [AWG]		28-12		
间距 Pitch [mm]		10.16		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M3/0.5		

UL/CUL 技术参数 UL/CUL Technical Data		C UL US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		15	-	10
接线范围 Wire Range		28-12		
单/多芯线 Solid/Stranded [AWG]		28-12		
间距 Pitch [mm]		5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M3/0.5		


DB2EK-10.0

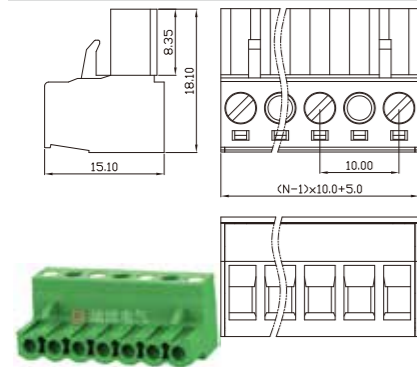

DB2EK-10.16

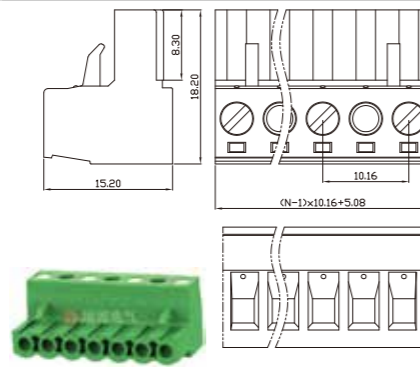

DB2EKM-5.08

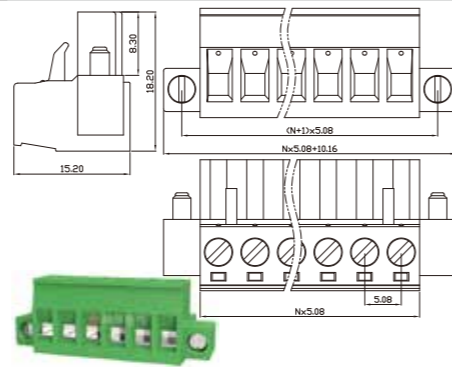


UL/CUL 技术参数 UL/CUL Technical Data		C UL US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		15	-	10
接线范围 Wire Range		28-12		
单/多芯线 Solid/Stranded [AWG]		28-12		
间距 Pitch [mm]		5.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M3/0.5		


UL/CUL 技术参数 UL/CUL Technical Data		C UL US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		15	-	10
接线范围 Wire Range		28-12		
单/多芯线 Solid/Stranded [AWG]		28-12		
间距 Pitch [mm]		5.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M3/0.5		

UL/CUL 技术参数 UL/CUL Technical Data		C UL US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		8	-	8
接线范围 Wire Range		28-16		
单/多芯线 Solid/Stranded [AWG]		28-16		
间距 Pitch [mm]		5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M2/0.2		


DB2EKM-5.0

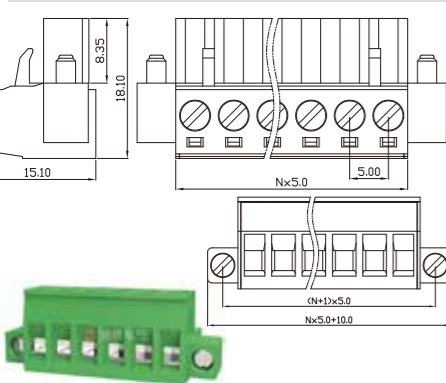

DB2EKM-3.81

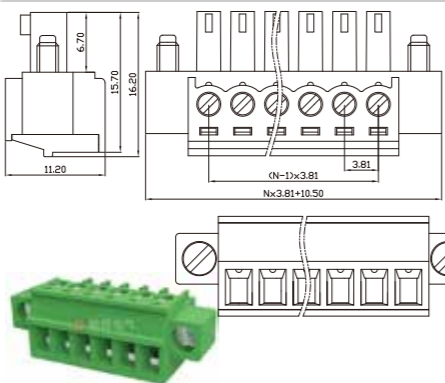

DB2EKM-3.5

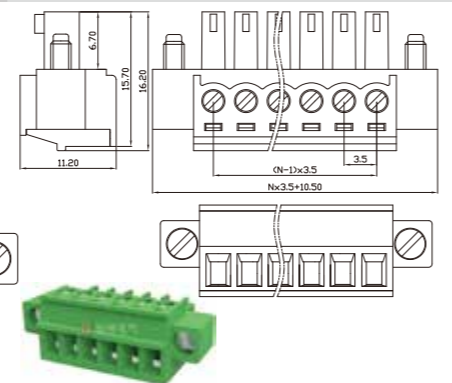


# 插拔式端子台 Plug-In terminal block

UL/CUL 技术参数 UL/CUL Technical Data		C UL US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		8	-	8
接线范围 Wire Range		28-16		
单/多芯线 Solid/Stranded [AWG]		28-16		
间距 Pitch [mm]		3.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M2.0/0.2		


UL/CUL 技术参数 UL/CUL Technical Data		C UL US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		8	-	8
接线范围 Wire Range		28-16		
单/多芯线 Solid/Stranded [AWG]		28-16		
间距 Pitch [mm]		5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M2.0/0.2		

UL/CUL 技术参数 UL/CUL Technical Data		C UL US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		12	-	10
接线范围 Wire Range		24-16		
单/多芯线 Solid/Stranded [AWG]		24-16		
间距 Pitch [mm]		3.81		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M2.0/0.2		


DB2EKG-3.5

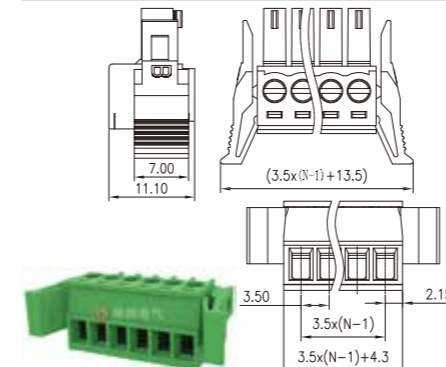

DB1EKM-5.08

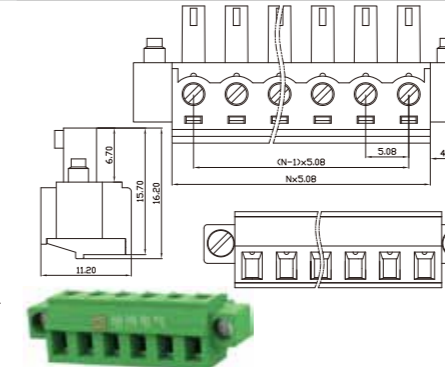

DB1EK-3.81

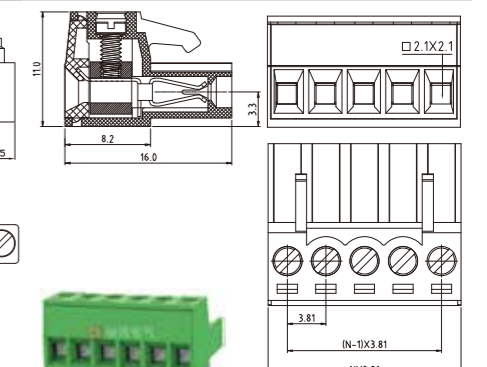


UL/CUL 技术参数 UL/CUL Technical Data		C UL US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		8	-	8
接线范围 Wire Range		28-16		
单/多芯线 Solid/Stranded [AWG]		28-16		
间距 Pitch [mm]		5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M2/0.2		


UL/CUL 技术参数 UL/CUL Technical Data		C UL US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	-
额定电流 Rated Current [A]		15	-	-
接线范围 Wire Range		26-12		
单/多芯线 Solid/Stranded [AWG]		26-12		
间距 Pitch [mm]		5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]		-		

UL/CUL 技术参数 UL/CUL Technical Data		C UL US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	-
额定电流 Rated Current [A]		10	-	-
接线范围 Wire Range		26-12		
单/多芯线 Solid/Stranded [AWG]		26-12		
间距 Pitch [mm]		5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]		-		


DB1EK-5.08

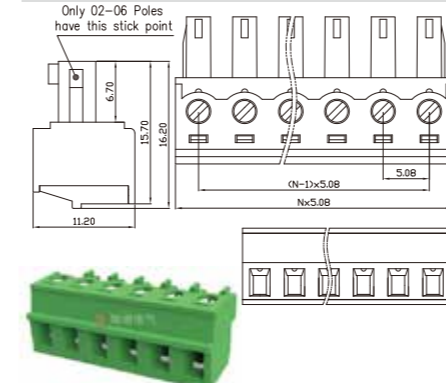

DB2EKDRP-5.08

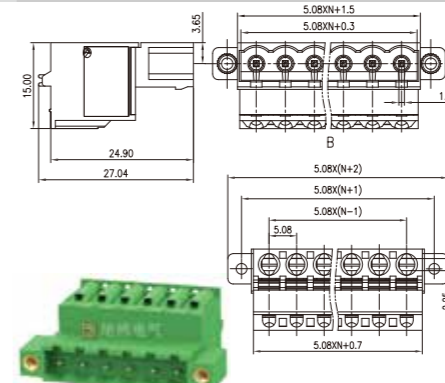

DB2EKDRM-5.08

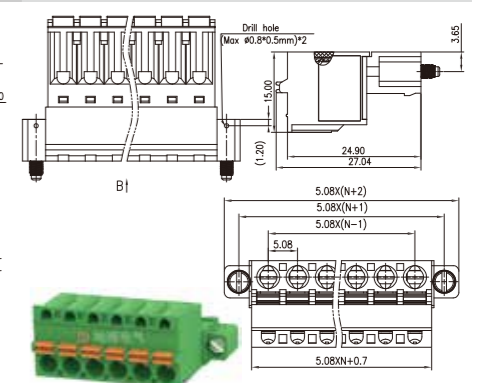


## 插拔式端子台 Plug-In terminal block

UL/CUL 技术参数 UL/CUL Technical Data		C <sub>RU</sub> US		
等级 Use Group	B C D	B	C	D
额定电压 Rated Voltage [V]		300	-	-
额定电流 Rated Current [A]		10	-	-
接线范围 Wire Range		26-12		
单/多芯线 Solid/Stranded [AWG]		26-12		
间距 Pitch [mm]		5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]		-		


UL/CUL 技术参数 UL/CUL Technical Data		C <sub>RU</sub> US		
等级 Use Group	B C D	B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		10	-	10
接线范围 Wire Range		24-12		
单/多芯线 Solid/Stranded [AWG]		24-12		
间距 Pitch [mm]		7.62		
螺丝 Screw/扭矩 Torque(Max) [N.m]		-		

UL/CUL 技术参数 UL/CUL Technical Data		C <sub>RU</sub> US		
等级 Use Group	B C D	B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		10	-	10
接线范围 Wire Range		28-12		
单/多芯线 Solid/Stranded [AWG]		28-12		
间距 Pitch [mm]		5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]		-		


DB2EKDR-5.08

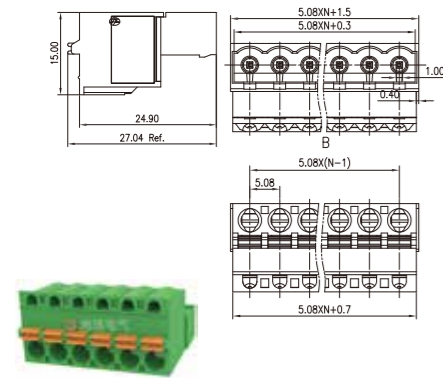


DB2EKDM-7.62

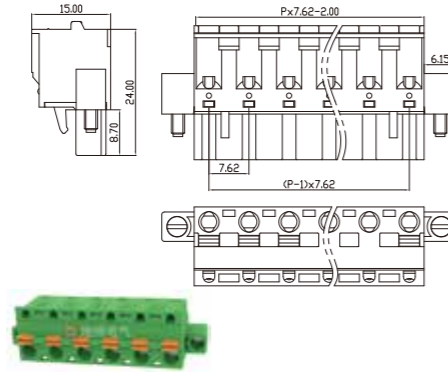


B2EKDM-5.08

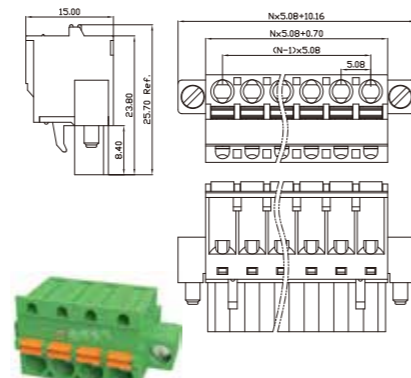


DB2EKNM-5.08

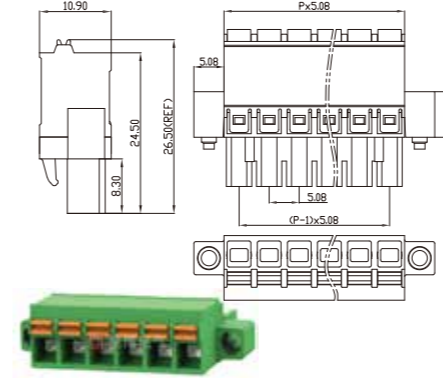

DB2EKN-5.08

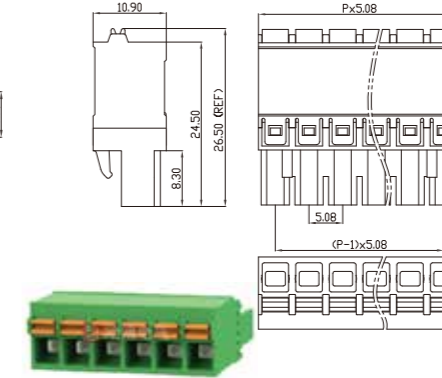

DB2EKNM-5.0

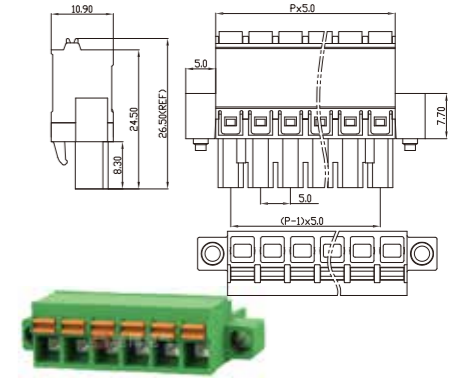

UL/CUL 技术参数 UL/CUL Technical Data		C <sub>RU</sub> US		
等级 Use Group	B C D	B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		8	-	8
接线范围 Wire Range		28-16		
单/多芯线 Solid/Stranded [AWG]		28-16		
间距 Pitch [mm]		3.81		
螺丝 Screw/扭矩 Torque(Max) [N.m]		-		

UL/CUL 技术参数 UL/CUL Technical Data		C <sub>RU</sub> US		
等级 Use Group	B C D	B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		8	-	8
接线范围 Wire Range		28-16		
单/多芯线 Solid/Stranded [AWG]		28-16		
间距 Pitch [mm]		3.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]		-		


UL/CUL 技术参数 UL/CUL Technical Data		C <sub>RU</sub> US		
等级 Use Group	B C D	B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		10	-	10
接线范围 Wire Range		24-12		
单/多芯线 Solid/Stranded [AWG]		24-12		
间距 Pitch [mm]		7.62		
螺丝 Screw/扭矩 Torque(Max) [N.m]		-		

UL/CUL 技术参数 UL/CUL Technical Data		C <sub>RU</sub> US		
等级 Use Group	B C D	B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		10	-	10
接线范围 Wire Range		24-12		
单/多芯线 Solid/Stranded [AWG]		24-12		
间距 Pitch [mm]		5.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]		-		


UL/CUL 技术参数 UL/CUL Technical Data		C <sub>RU</sub> US		
等级 Use Group	B C D	B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		10	-	10
接线范围 Wire Range		28-12		
单/多芯线 Solid/Stranded [AWG]		28-12		
间距 Pitch [mm]		5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]		-		

UL/CUL 技术参数 UL/CUL Technical Data		C <sub>RU</sub> US		
等级 Use Group	B C D	B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		8	-	8
接线范围 Wire Range		28-16		
单/多芯线 Solid/Stranded [AWG]		28-16		
间距 Pitch [mm]		3.81		
螺丝 Screw/扭矩 Torque(Max) [N.m]		-		


DB2EKDM-3.81

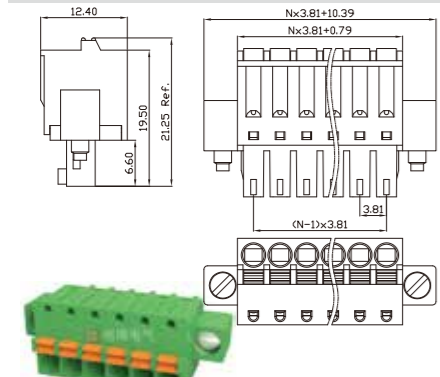


DB2EKDM-3.5

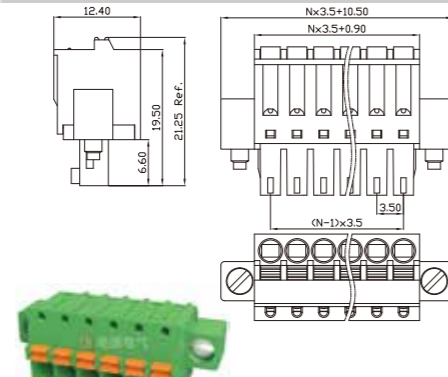


DB2EKD-7.62

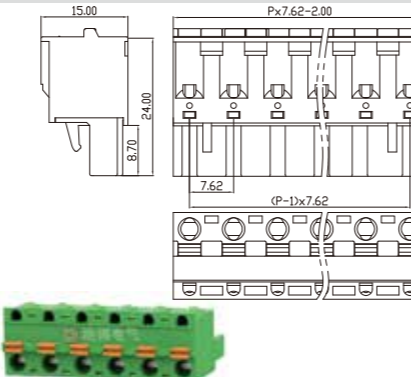


DB2EKN-5.0

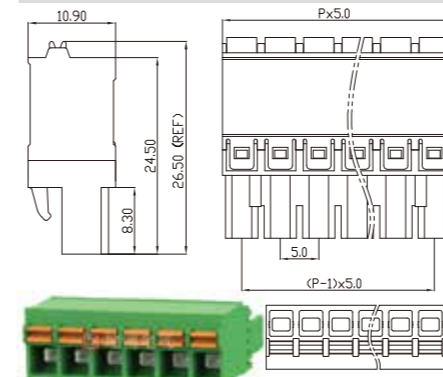

DB2EKD-5.08

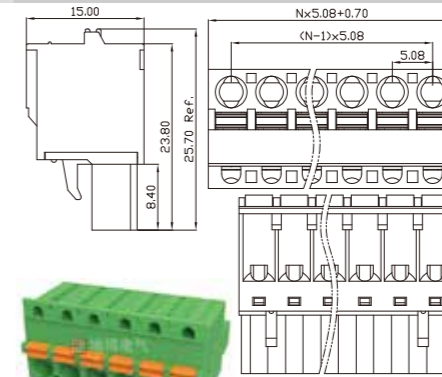

DB2EKD-3.81



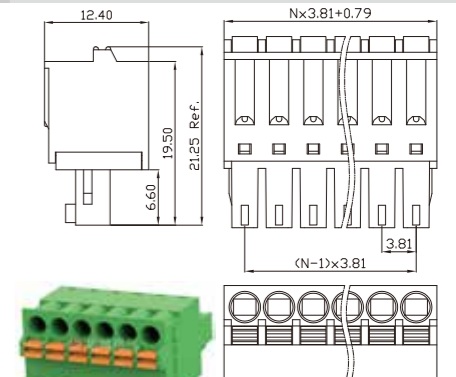


# 插拔式端子台 Plug-In terminal block

UL/CUL 技术参数 UL/CUL Technical Data		C UL US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		8	-	8
接线范围 Wire Range		28-16		
单/多芯线 Solid/Stranded [AWG]		28-16		
间距 Pitch [mm]		3.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]		-		

UL/CUL 技术参数 UL/CUL Technical Data		C UL US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		150	-	-
额定电流 Rated Current [A]		15	-	-
接线范围 Wire Range		26-20		
单/多芯线 Solid/Stranded [AWG]		26-20		
间距 Pitch [mm]		2.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]		-		




UL/CUL 技术参数 UL/CUL Technical Data		C UL US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		10	-	10
接线范围 Wire Range		24-12		
单/多芯线 Solid/Stranded [AWG]		24-12		
间距 Pitch [mm]		5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]		-		

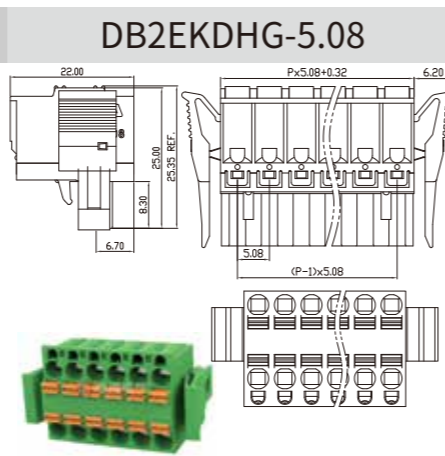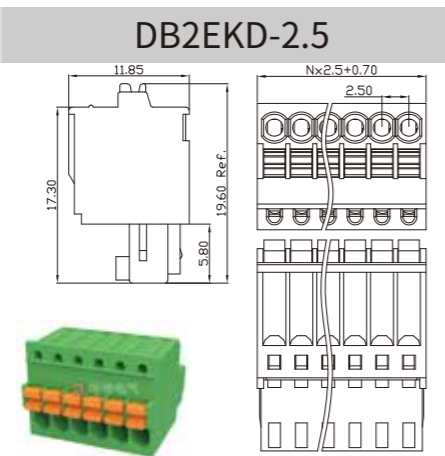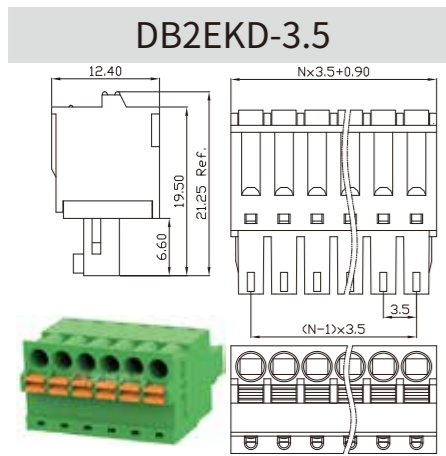

UL/CUL 技术参数 UL/CUL Technical Data		C UL US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		10	-	10
接线范围 Wire Range		24-12		
单/多芯线 Solid/Stranded [AWG]		24-12		
间距 Pitch [mm]		5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]		-		

UL/CUL 技术参数 UL/CUL Technical Data		C UL US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		10	-	10
接线范围 Wire Range		24-12		
单/多芯线 Solid/Stranded [AWG]		24-12		
间距 Pitch [mm]		5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]		-		

UL/CUL 技术参数 UL/CUL Technical Data		C UL US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		10	-	10
接线范围 Wire Range		24-12		
单/多芯线 Solid/Stranded [AWG]		24-12		
间距 Pitch [mm]		5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]		-		

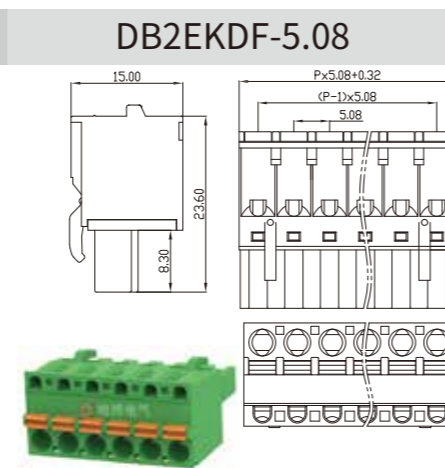
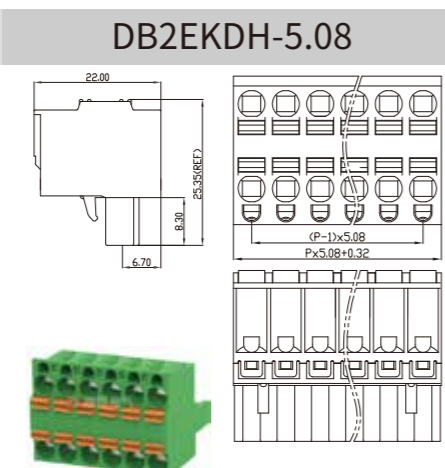
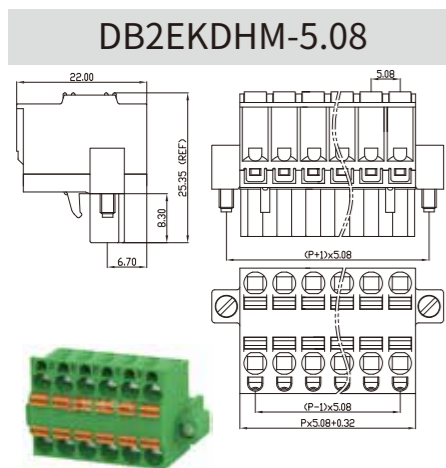


# 插拔式端子台 Plug-In terminal block

UL/CUL 技术参数 UL/CUL Technical Data		C UL US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		10	-	10
接线范围 Wire Range		24-12		
单/多芯线 Solid/Stranded [AWG]		24-12		
间距 Pitch [mm]		5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]		-		

UL/CUL 技术参数 UL/CUL Technical Data		C UL US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		10	-	10
接线范围 Wire Range		24-12		
单/多芯线 Solid/Stranded [AWG]		24-12		
间距 Pitch [mm]		5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]		-		




UL/CUL 技术参数 UL/CUL Technical Data		C UL US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		10	-	10
接线范围 Wire Range		24-12		
单/多芯线 Solid/Stranded [AWG]		24-12		
间距 Pitch [mm]		5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]		-		

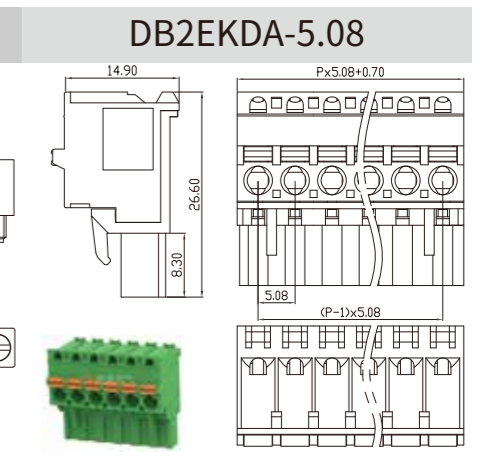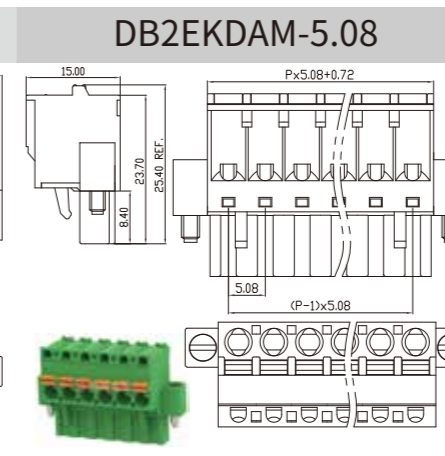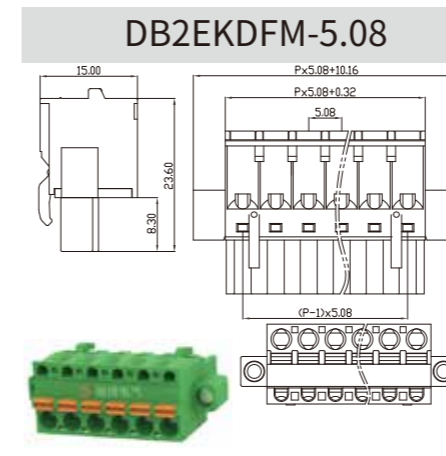

UL/CUL 技术参数 UL/CUL Technical Data		C UL US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		15	-	10
接线范围 Wire Range		28-12		
单/多芯线 Solid/Stranded [AWG]		28-12		
间距 Pitch [mm]		5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M2.5/0.4		

UL/CUL 技术参数 UL/CUL Technical Data		C UL US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		8	-	10
接线范围 Wire Range		28-16		
单/多芯线 Solid/Stranded [AWG]		28-16		
间距 Pitch [mm]		3.81		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M2.0/0.2		

UL/CUL 技术参数 UL/CUL Technical Data		C UL US		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	-	300
额定电流 Rated Current [A]		15	-	10
接线范围 Wire Range		28-12		
单/多芯线 Solid/Stranded [AWG]		28-12		
间距 Pitch [mm]		5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]		M2.5/0.4		

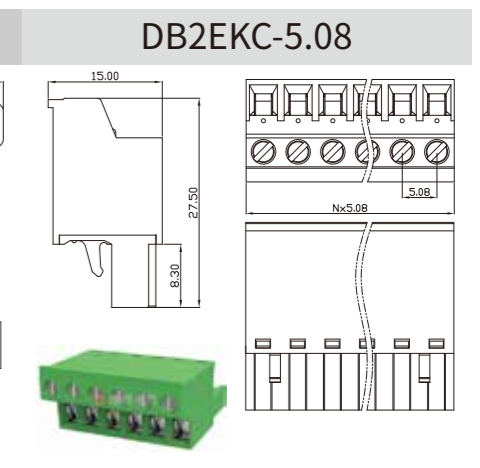
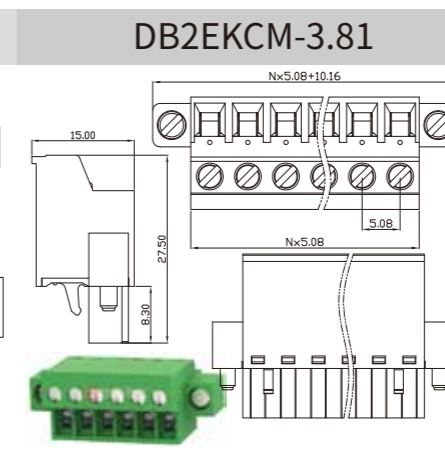
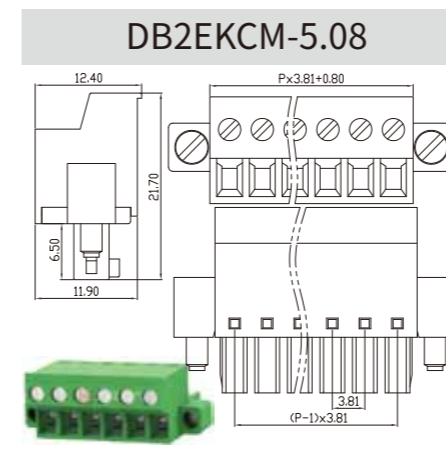


# 插拔式端子台 Plug-In terminal block

UL/CUL 技术参数 UL/CUL Technical Data			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	8	-	8
接线范围 Wire Range	28-16		
单/多芯线 Solid/Stranded [AWG]	28-16		
间距 Pitch [mm]	3.81		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M2.5/0.2		

UL/CUL 技术参数 UL/CUL Technical Data			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	15	-	10
接线范围 Wire Range	28-12		
单/多芯线 Solid/Stranded [AWG]	28-12		
间距 Pitch [mm]	7.62		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.5		




UL/CUL 技术参数 UL/CUL Technical Data			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	15	-	10
接线范围 Wire Range	28-12		
单/多芯线 Solid/Stranded [AWG]	28-12		
间距 Pitch [mm]	7.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.5		

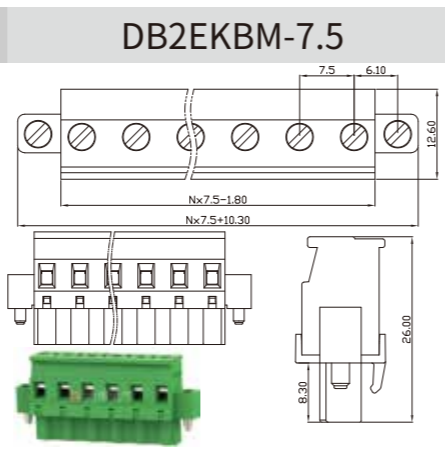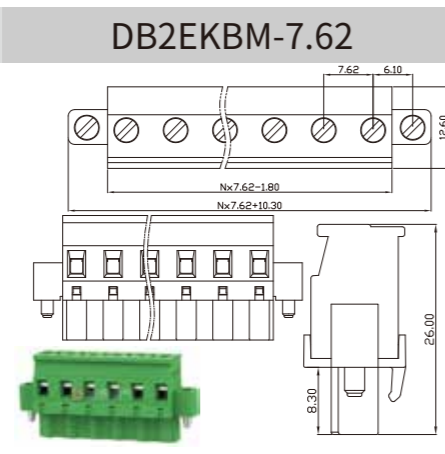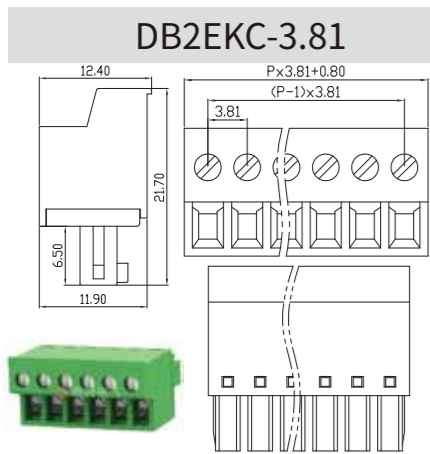

UL/CUL 技术参数 UL/CUL Technical Data			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	15	-	10
接线范围 Wire Range	28-12		
单/多芯线 Solid/Stranded [AWG]	28-12		
间距 Pitch [mm]	5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.5		

UL/CUL 技术参数 UL/CUL Technical Data			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	15	-	10
接线范围 Wire Range	28-12		
单/多芯线 Solid/Stranded [AWG]	28-12		
间距 Pitch [mm]	5.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.5		

UL/CUL 技术参数 UL/CUL Technical Data			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	8	-	8
接线范围 Wire Range	28-16		
单/多芯线 Solid/Stranded [AWG]	28-16		
间距 Pitch [mm]	3.81		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M2/0.2		

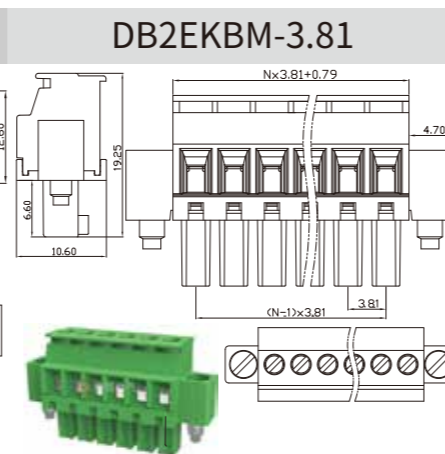
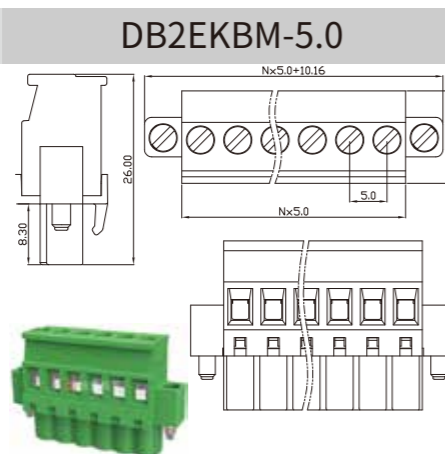
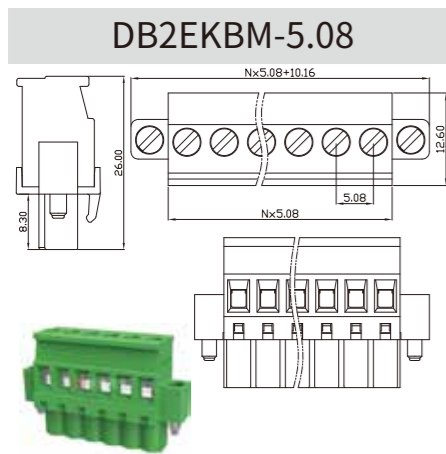


# 插拔式端子台 Plug-In terminal block

UL/CUL 技术参数 UL/CUL Technical Data			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	8	-	8
接线范围 Wire Range	28-16		
单/多芯线 Solid/Stranded [AWG]	28-16		
间距 Pitch [mm]	3.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M2/0.2		

UL/CUL 技术参数 UL/CUL Technical Data			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	15	-	10
接线范围 Wire Range	28-12		
单/多芯线 Solid/Stranded [AWG]	28-12		
间距 Pitch [mm]	7.62		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.5		

UL/CUL 技术参数 UL/CUL Technical Data			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	15	-	10
接线范围 Wire Range	28-12		
单/多芯线 Solid/Stranded [AWG]	28-12		
间距 Pitch [mm]	7.5		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.5		

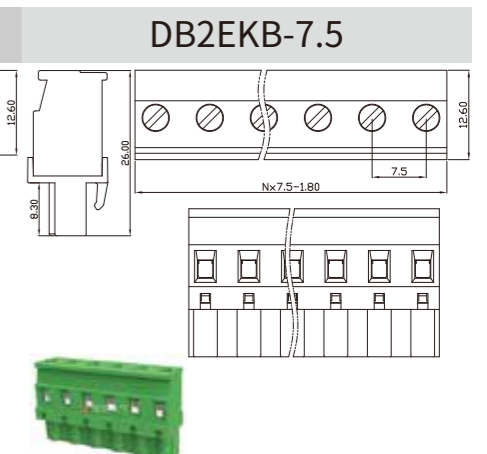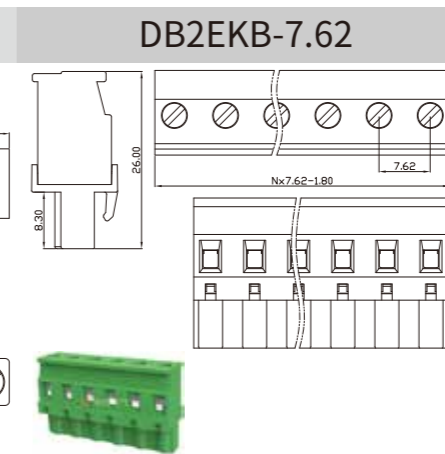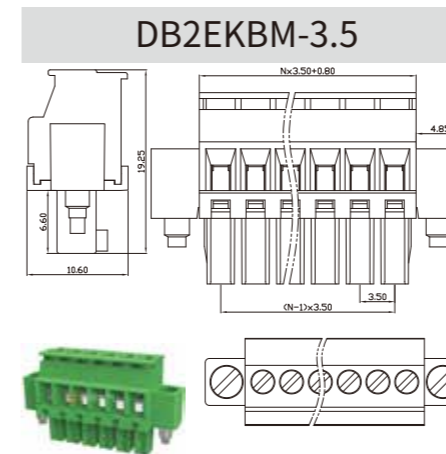

UL/CUL 技术参数 UL/CUL Technical Data			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	15	-	10
接线范围 Wire Range	28-12		
单/多芯线 Solid/Stranded [AWG]	28-12		
间距 Pitch [mm]	5.08		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.5		

UL/CUL 技术参数 UL/CUL Technical Data			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	15	-	10
接线范围 Wire Range	28-12		
单/多芯线 Solid/Stranded [AWG]	28-12		
间距 Pitch [mm]	5.0		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M3/0.5		

UL/CUL 技术参数 UL/CUL Technical Data			
等级 Use Group	B	C	D
额定电压 Rated Voltage [V]	300	-	300
额定电流 Rated Current [A]	8	-	8
接线范围 Wire Range	28-16		
单/多芯线 Solid/Stranded [AWG]	28-16		
间距 Pitch [mm]	3.81		
螺丝 Screw/扭矩 Torque(Max) [N.m]	M2/0.2		

