


| linear dimension(Tolerances Standard GB/T 14486-2008) |       |              |               |               |                |                 |             | —     | $\nabla$       | $\perp$     |
|---|-------|--------------|---------------|---------------|----------------|-----------------|-------------|-------|----------------|-------------|
| variable range  | to 6  | over 6 to 10 | over 10 to 30 | over 30 to 60 | over 60 to 100 | over 100 to 160 | over 160 to | to 10 | over 10 to 100 | over 100 to |
| tolerance   | ±0.20 | ±0.30        | ±0.50         | ±0.70         | ±1.00          | ±1.30           | ±1.60       | 0.10  | 0.30           | 0.60        |

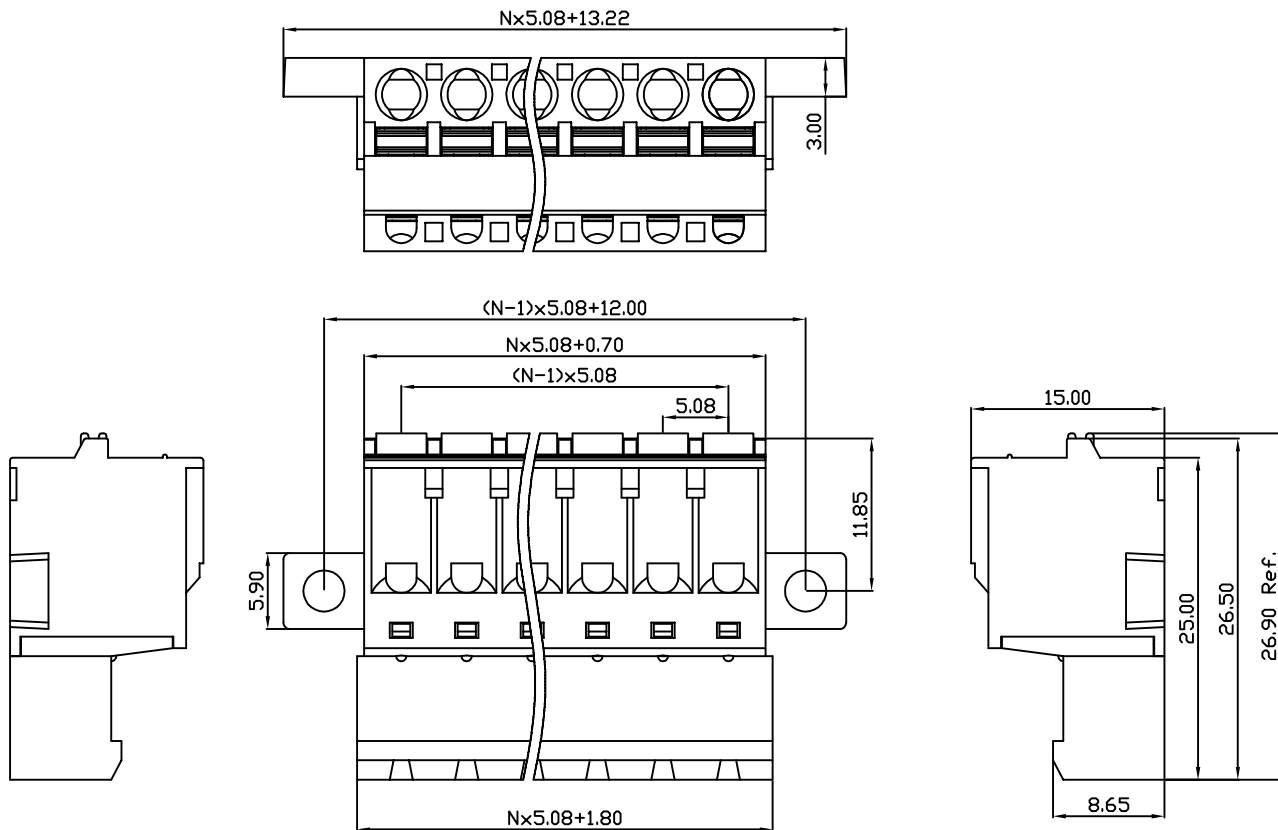

| UL/CUL 技术参数                               | UL/CUL Technical Data |     |     |
|---|-----------------------|-----|-----|
| 等级 Use Group                              | B                     | C   | D   |
| 额定电压 Rated Voltage [V]                    | 300                   | -   | 300 |
| 额定电流 Rated Current [A]                    | 10                    | -   | 10  |
| 接线范围 Wire Range                           | 28-12                 |     |     |
| 单/多芯线 Solid/Stranded [AWG]                |                       |     |     |
| 耐电压 Withstanding Voltage                  | 1600V/1Min            |     |     |
| IEC 技术参数                                  | IEC Technical Data    |     |     |
| 过电压类别 Overvoltage Category                | III                   | III | II  |
| 污染等级 Contamination Class                  | 3                     | 2   | 2   |
| 额定电压 Rated Voltage [V]                    | 250                   | 320 | 630 |
| 额定电流 Rated Current [A]                    | 12                    | 12  | 12  |
| 额定冲击电压 Impulse withstand voltagea [KV]    | 4.0                   | 4.0 | 4.0 |
| 导线截面积 Conductor cross section             | 2.5                   |     |     |
| 硬质/柔性导线 Solid/flexible [mm <sup>2</sup> ] |                       |     |     |
| 材料 Material                               |                       |     |     |
| 绝缘材料 Insulation Material                  | PA66                  |     |     |
| 阻燃等级 Inflammability                       | UL94V-0               |     |     |
| 导体材料 Contactor Material                   | 铜合金 Copper alloy      |     |     |
| 导体表面镀层 Contactive Coating                 | 镀镍 Ni Plated          |     |     |
| 一般参数 Other Data                           |                       |     |     |
| 间距 Pitch [mm]                             | 5.08                  |     |     |
| 极数 Poles [P]                              | 02-24                 |     |     |
| 剥线长度 Stripping Length [mm]                | 10                    |     |     |
| 螺丝 Screw/扭矩 Torque(Max) [N.m]             | -                     |     |     |
| 工作温度 Operating temperatur [°C]            | -40~+105              |     |     |
| 引针尺寸 Pin Dimensions [mm]                  | -                     |     |     |
| PCB板孔径 PCB Hole Diameter [mm]             | -                     |     |     |

DB2EKDRN — 5.08 — XXP — C

(Series No.) (Pitch) (Poles)

(Color):GN:(Green), BK:(Black), BU:(Blue), RD:(Red), GY:(Gray)  
OG:(Orange), WT:(White), YL:(Yellow), CR:(Clear)

APPD: JTING Chen 2024.01.19

CHKD: Duck Mao 2024.01.19

DRFT: Steven Lu 2024.01.19

**DORABO**

宁波地博电气有限公司  
Ningbo Dorabo Electric CO., Ltd

NAME:

DB2EKDRN-5.08-XXP-C



SIZE: A4

mm  
(inch)

REV

T0-1

TYPE: CUSTOMER\_DRAWING

SCALE: 1:1

SHEET

1/1