





未注公差/General tolerances(mm)														 0.1/10  ±2°
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	>500	
3	6	10	18	30	50	80	120	180	250	315	400	500		
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	

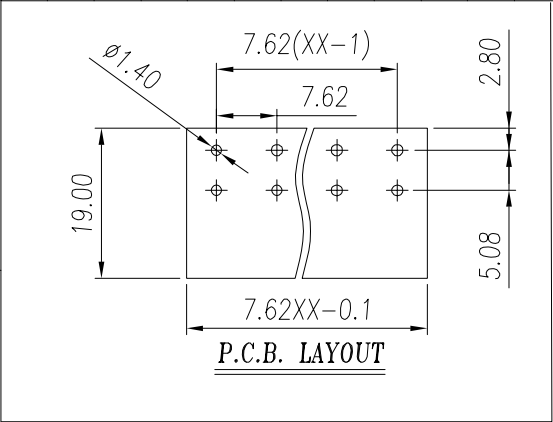

UL 标准/UL Standard:	B	C	D
额定电压/电流/Rated Voltage(V)/Current(A)	300/15	/	300/10
IEC 标准/IEC Standard:			
过压类别/Overvoltage Category/污染等级/Pollution Degree	Ⅲ/2		
额定电压/电流/Rated Voltage(V)/Current(A)	630/12		
额定脉冲电压(KV)/Rate Impulse Voltage(KV)	6.0		
螺丝扭矩/Torque Tightening(N·m/Lb.in)	/		
线径范围(硬线和软线)/Wire Range(rigid and flexible)(mm ² /AWG)	/		
间距/Pitch(mm)/线数范围/Poles	7.62/XX=02~24P		
剥线长度/Stripping length(mm)	/		
使用温度范围/Operating temperature(°C)	-40~+105		
符合RoHS环保要求/Conform to RoHS	Yes		

1	2
---	---



3

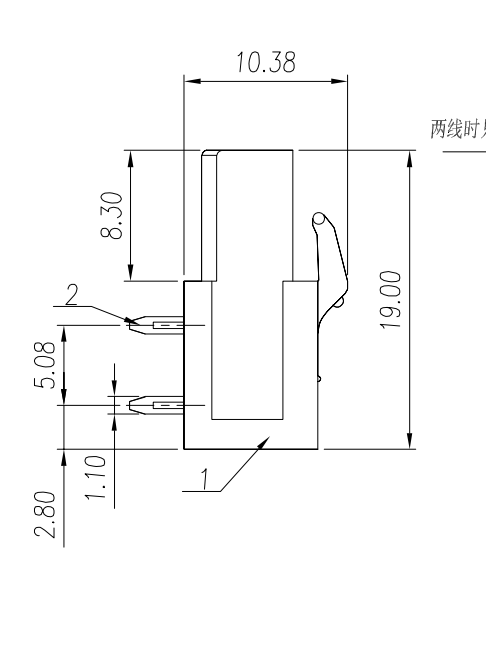

DB2EA — 7.62 — XXP — C
(Series No.) (Pitch) (Poles)
(Color) : GN:(Green) , BK:(Black) , BU:(Blue) , RD:(Red) , GY:(Gray) OG:(Orange) , WT:(White) , YL:(Yellow) , CR:(Clear)

3



4

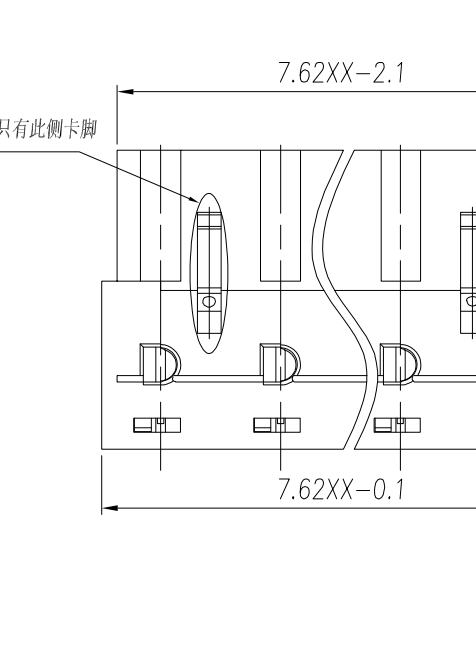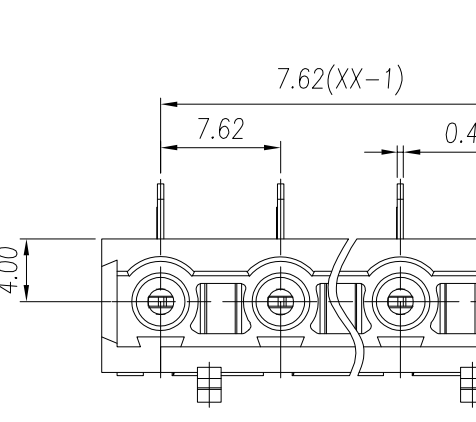

MAT NO.: /	DORABO 宁波地博电气有限公司 NINGBO DORABO ELECTRICAL CO., LTD		
STATUS: /			
APPD: MARK 2024.10.26			
CHKD: MARK 2024.10.26			
DRFT: MARK 2024.10.26	NAME: DB2EA-7.62-XXP-C		
SIZE: A4	mm (inch)	DRAWING NO.: /	REV M0
TYPE: CUSTOMER_DRAWING	SCALE:	SHEET	1/1

4

5	6
---	---

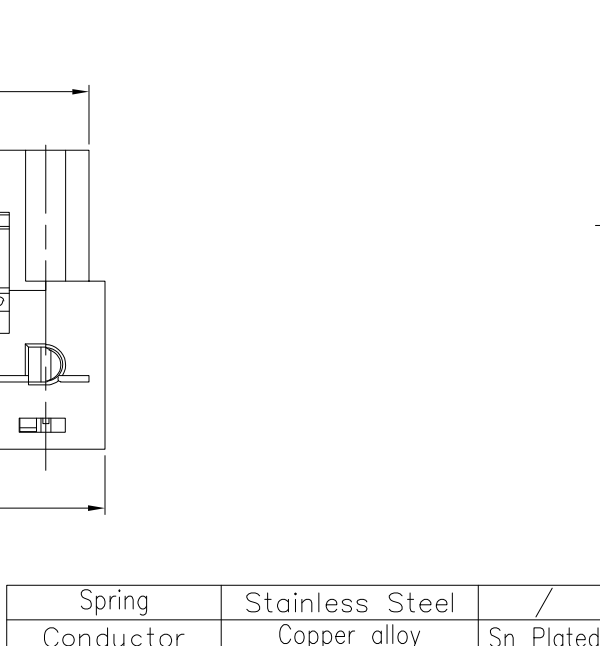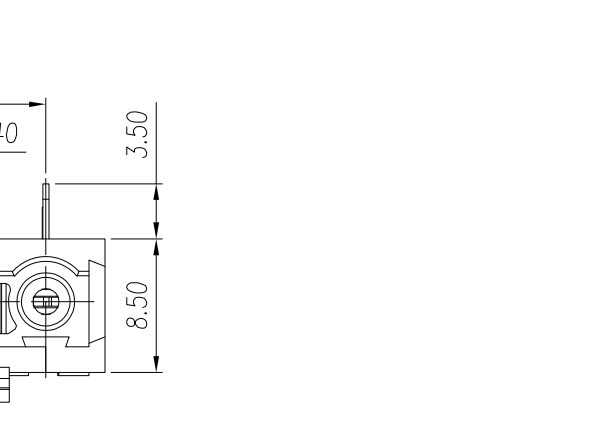

Spring	Stainless Steel	/
Conductor	Copper alloy	Sn Plated
Button	PA66	UL94V-0
Insulator	PA66	UL94V-0
NAME OF PART	MATERIAL	NOTES

5	6
---	---