
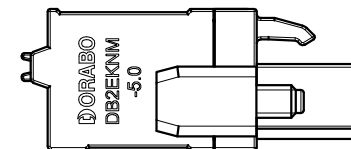
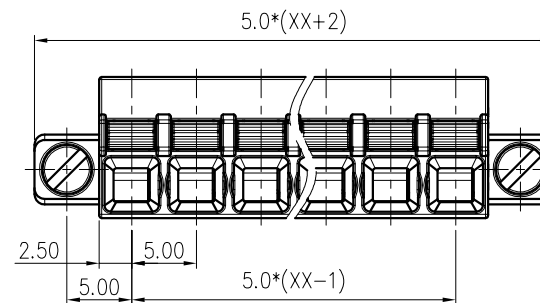


>30 ~ 50	>50 ~ 80	>80 ~ 120	>120 ~ 180	>180 ~ 250	>250 ~ 315	>315 ~ 400	>400 ~ 500	>500	 0.1/10
±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	 ±2°

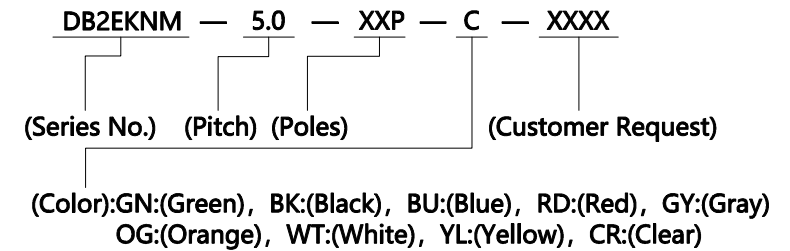

UL 标准/UL Standard:	B	C	D
额定电压/电流/Rated Voltage(V)/Current(A)	300/10	/	300/10
IEC 标准/IEC Standard:			
过压类别/Overtoltage Category /污染等级/Pollution Degree	III/3	III/2	II/2
额定电压/电流/Rated Voltage(V)/Current(A)	320/12	320/12	630/12
额定冲击电压(KV)/Rate Impulse Voltage(KV)	4	4	4
线径范围(硬线和软线)/Wire Range(rigid and flexible)(AWG/mm ²)	24~16/0.2~2.5		
间距/Pitch(mm)/线数范围/Poles	5.0/XX=2~24P		
剥线长度/Stripping length(mm)	10~11		
使用温度范围/Operating temperature(°C)	-40~+105		
符合RoHS环保要求 /Conform to RoHS	Yes		

MAT NO.: /		 宁波地博电气有限公司 NINGBO DORABO ELECTRICAL CO., LTD	
STATUS: /			
APPD: Steven Lu 2026.1.4		NAME: DB2EKNM-5.0-XXP-C	
CHKD: Jting Chen 2026.1.4			
DRFT: Tom Mao 2026.1.4		DRAWING NO.: /	
	SIZE: A4		TYPE: CUSTOMER DRAWING
		SCALE: 1:1	REV: A
		SHEET	1/1