
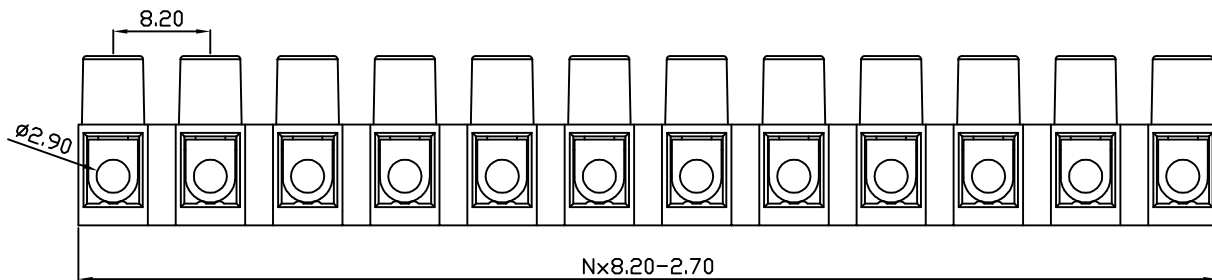


linear dimension(Tolerances Standard GB/T 14486-2008)								—	∕	⊥
variable range	to	over	over	over	over	over	over	to	over	over
	6	6 to 10	10 to 30	30 to 60	60 to 100	100 to 160	160 to		10 to 100	100 to
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

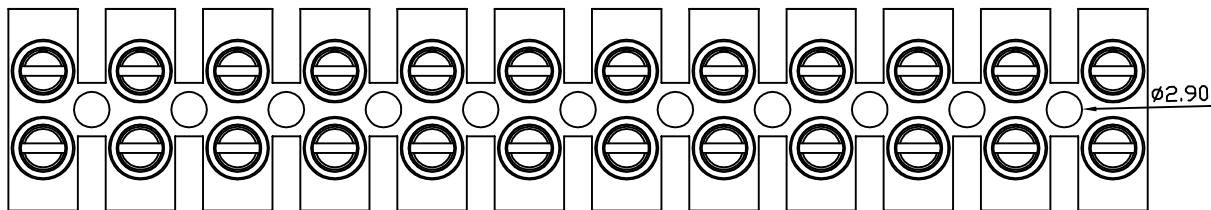

UL/CUL 技术参数		UL/CUL Technical Data		
额定电压	Rated Voltage [V]		300	
额定电流	Rated Current [A]		20	
接线范围	Wire Range	22-12		
单/多芯线	Solid/Stranded [AWG]			
IEC 技术参数		IEC Technical Data		
额定电压	Rated Voltage [V]		450	
额定电流	Rated Current [A]		17.5	
耐电压	Withstanding Voltage [AWG]		1600V/1Min	
导线截面积	Conductor cross section	0.75-1.5		
硬质/柔性导线	Solid/flexible [mm²]			
材料		Material		
绝缘材料	Insulation Material	PA66		
阻燃等级	Imflammability	UL94V-2		
导体材料	Contactur Material	铜合金 Copper alloy		
导体表面镀层	Contactive Coating	镀镍 Ni Plated		
一般参数		Other Data		
间距	Pitch [mm]		8.20	
极数	Poles [P]		02~12	
螺丝	Screw/扭矩 Torque(Max) [N.m]		M2.5/0.4	
工作温度	Operating temperatur [°C]		-40~+105	
引针尺寸	Pin Dimensions [mm]		-	
PCB板孔径	PCB Hole Diameter [mm]		-	

DB8H — 8.20 — XXP — C — S/P

(Series No.) (Pitch) (Poles)

Slotted/Phillips

(Color):GN:(Green), BK:(Black), BU:(Blue), RD:(Red), GY:(Gray)
OG:(Orange), WT:(White), YL:(Yellow), CR:(Clear)

APPD: JTING Chen 2023.02.25
CHKD: Duck Mao 2023.02.25
DRFT: Steven Lu 2023.02.25

DORABO 宁波地博电气有限公司 Ningbo Dorabo Electric CO., Ltd				
NAME: DB8H-8.20-XXP-C-S				
		SIZE: A4	mm (inch)	REV T0-1
TYPE: CUSTOMER_DRAWING		SCALE: 1:1	SHEET	1/1