

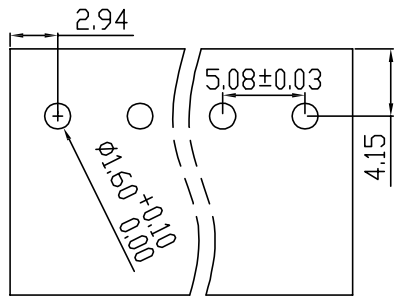





| linear dimension(Tolerances Standard GB/T 14486-2008) | | | | | | | | — | ∇ | \perp |
|---|-------|--------------|---------------|---------------|----------------|-----------------|-------------|-------|----------------|-------------|
| variable range | to 6 | over 6 to 10 | over 10 to 30 | over 30 to 60 | over 60 to 100 | over 100 to 160 | over 160 to | to 10 | over 10 to 100 | over 100 to |
| tolerance | ±0.20 | ±0.30 | ±0.50 | ±0.70 | ±1.00 | ±1.30 | ±1.60 | 0.10 | 0.30 | 0.60 |

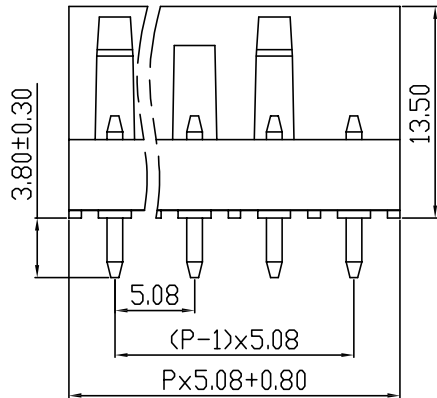

PCB Layout



| UL/CUL 技术参数 UL/CUL Technical Data | | | | |
|--------------------------------------|--|------------------|-----|-----|
| 等级 | Use Group | B | C | D |
| 额定电压 | Rated Voltage [V] | 300 | - | - |
| 额定电流 | Rated Current [A] | 10 | - | - |
| 接线范围 单/多芯线 | Wire Range Solid/Stranded [AWG] | - | | |
| 耐电压 | Withstanding Voltage | 1600V/1Min | | |
| IEC 技术参数 IEC Technical Data | | | | |
| 过电压类别 | Overvoltage Category | III | III | II |
| 污染等级 | Contamination Class | 3 | 2 | 2 |
| 额定电压 | Rated Voltage [V] | 250 | 320 | 500 |
| 额定电流 | Rated Current [A] | 15 | 15 | 15 |
| 额定冲击电压 | Impulse withstand voltagea [KV] | 4 | 4 | 4 |
| 导线截面积 硬质/柔性导线 | Conductor cross section Solid/ flexible [mm²] | - | | |
| 材料 Material | | | | |
| 绝缘材料 | Insulation Material | PA66 | | |
| 阻燃等级 | Inflammability | UL94V-0 | | |
| 导体材料 | Contact Material | 铜合金 Copper alloy | | |
| 导体表面镀层 | Contactive Coating | 镀锡 Sn Plated | | |
| 一般参数 Other Data | | | | |
| 间距 | Pitch [mm] | 5.08 | | |
| 极数 | Poles [P] | 02-24 | | |
| 剥线长度 | Stripping Length [mm] | - | | |
| 螺丝 | Screw/ 扭矩 Torque(Max) [N.m] | - | | |
| 工作温度 | Operating temperatur [°C] | -40~+105 | | |
| 引针尺寸 | Pin Dimensions [mm] | 3.8 | | |
| PCB板孔径 | PCB Hole Diameter [mm] | 1.60 | | |

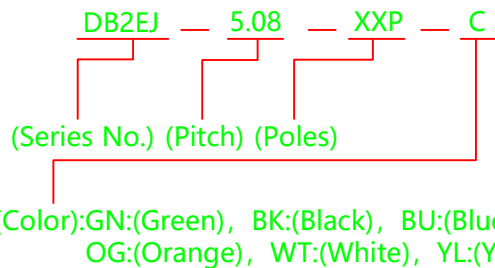

| | | |
|-------|------------|------------|
| APPD: | JTing Chen | 2022.11.23 |
| CHKD: | Duck Mao | 2022.11.23 |
| DRFT: | Steven Lu | 2022.11.23 |

| | | | | | |
|------------------------|-----------------|---|--------------|-----|------|
| DORABO | | 宁波地博电气有限公司 Ningbo Dorabo Electric CO., Ltd | | | |
| | | NAME: DB2EJ-5.08-XXP-C | | | |
| \oplus | \triangleleft | SIZE: A4 | mm (inch) | REV | T0-1 |
| TYPE: CUSTOMER_DRAWING | | SCALE: 1:1 | SHEET | 1/1 | |